


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD	15 JUN 70			GH	LS
A		REVISED PER CEMN	JULY 9/70	811			
B		REVISED PER CEMN	JAN 8/71	892	JR.		
C		REVISED PER CEMN	MAR 16-71	934	CT		

REV.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

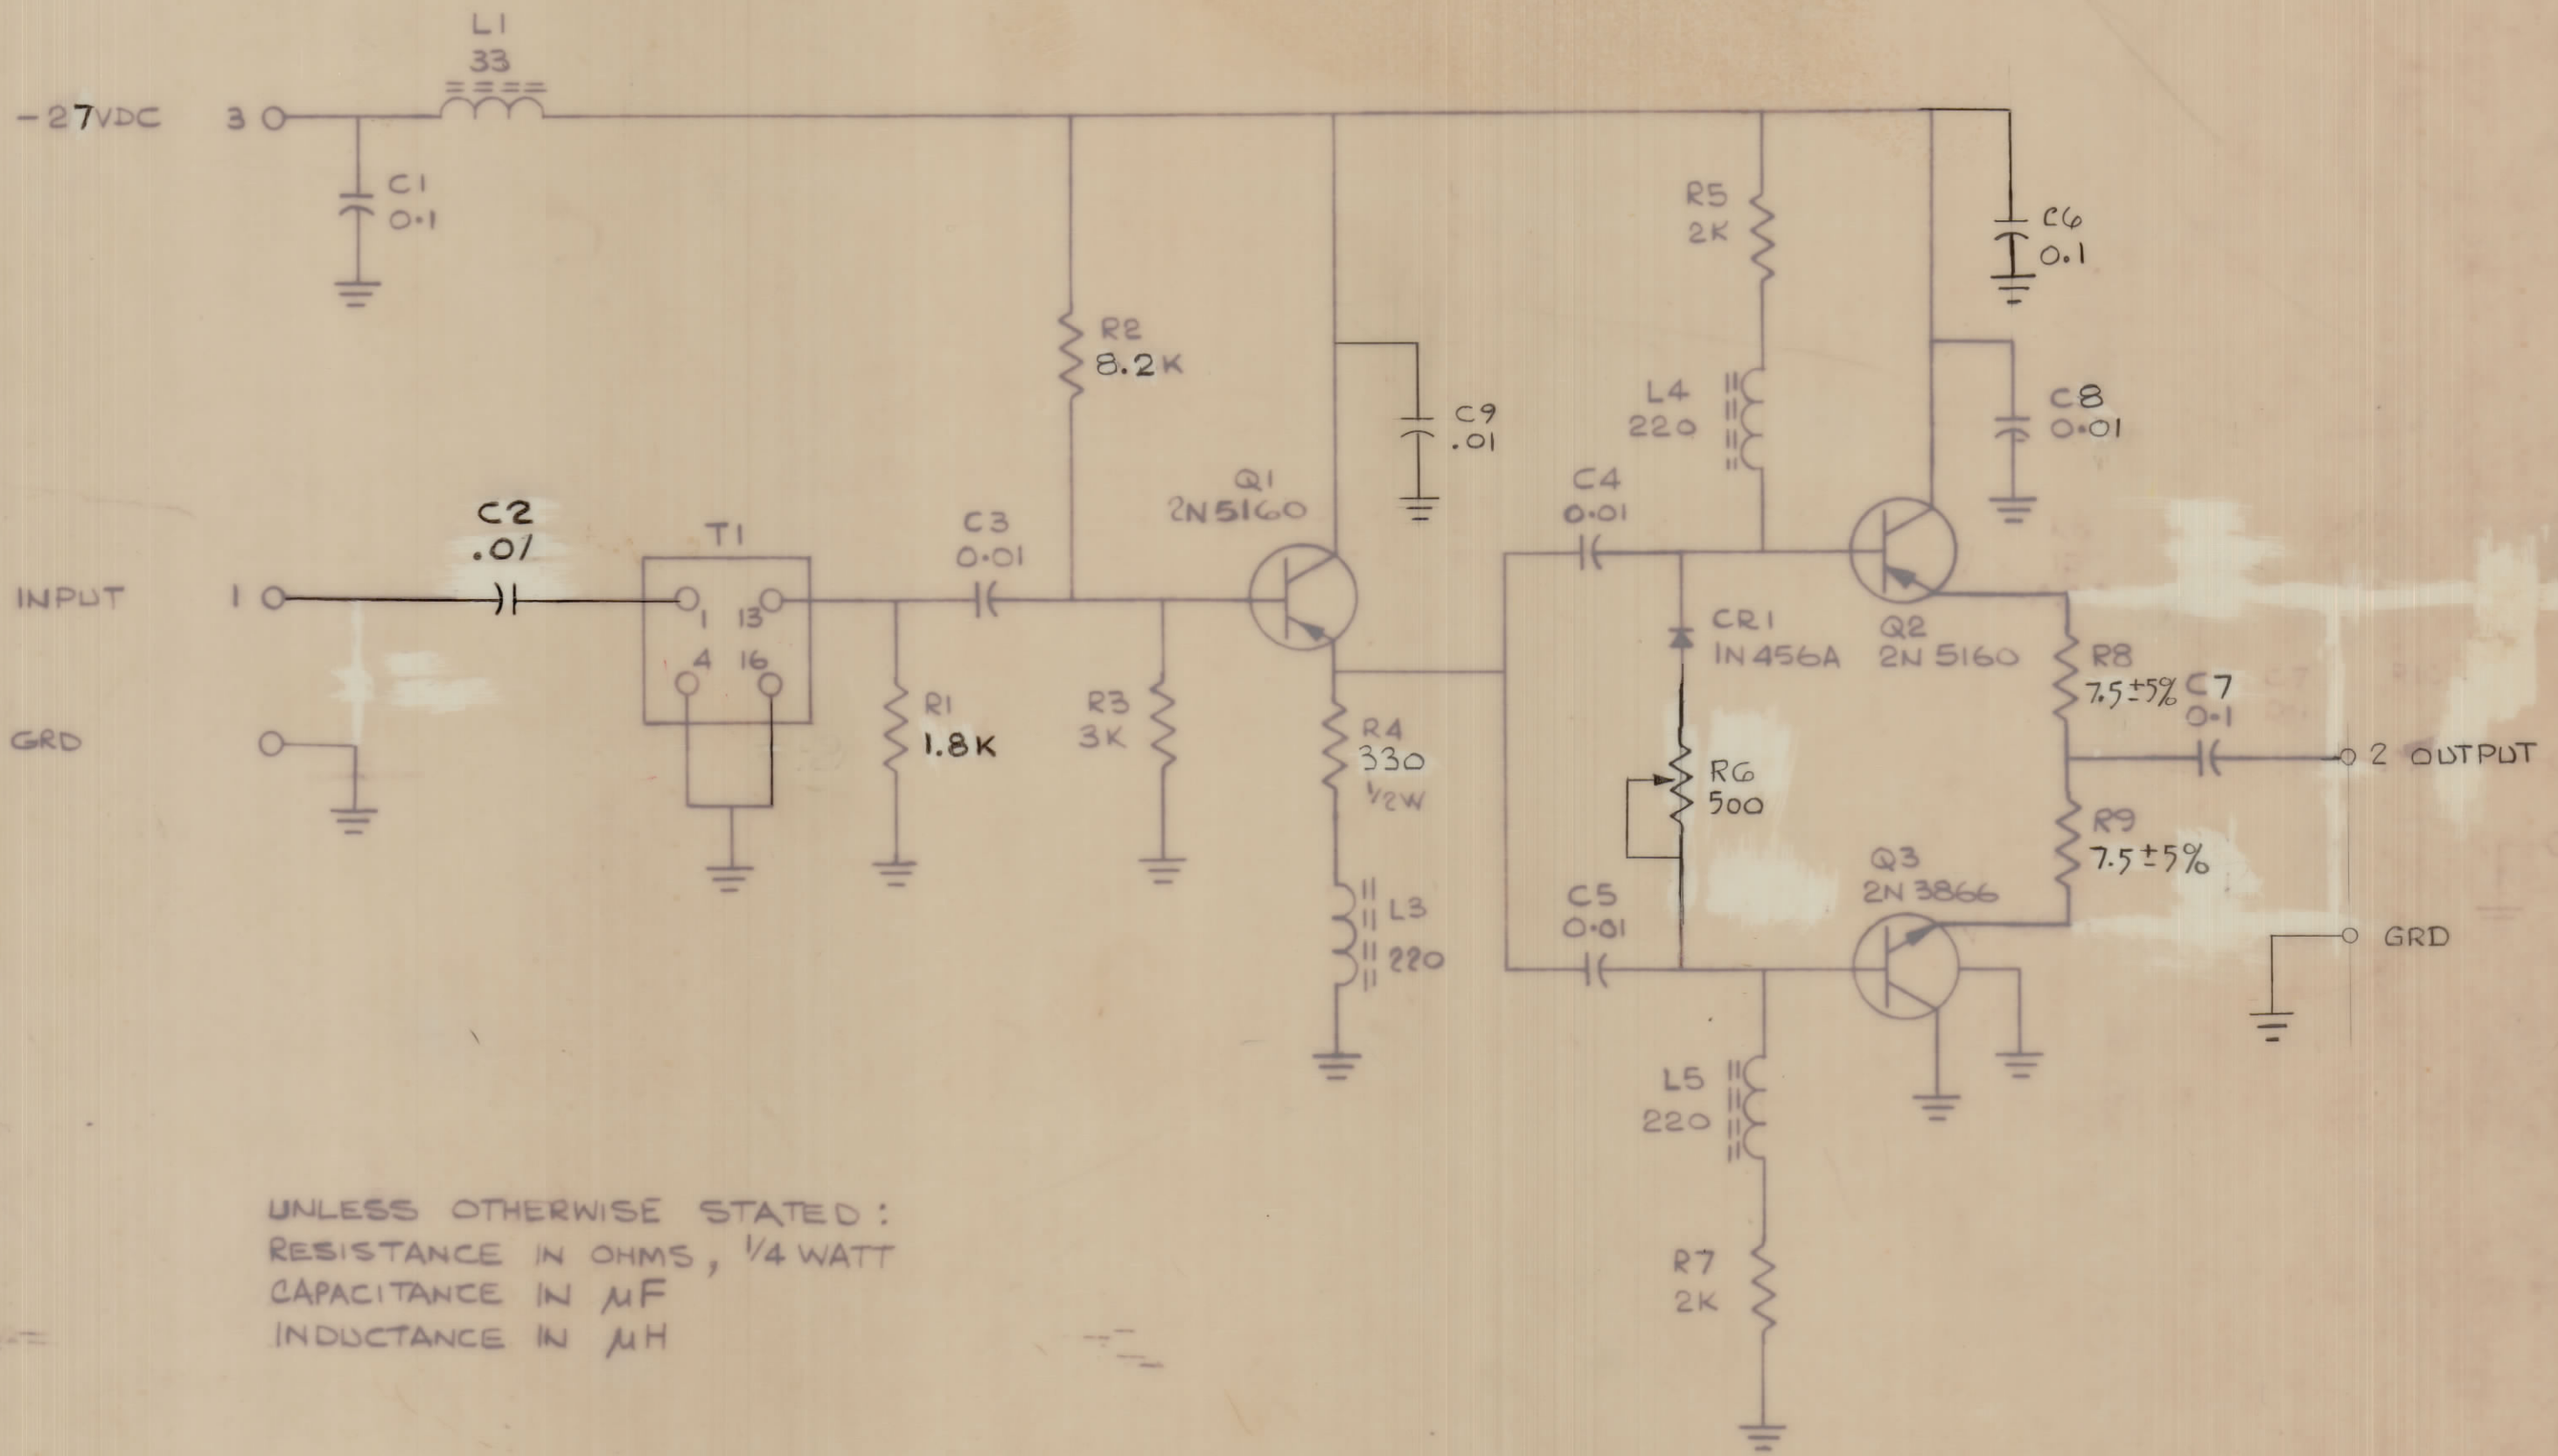

CK10771 C

UNLESS OTHERWISE STATED:
 RESISTANCE IN OHMS, 1/4 WATT
 CAPACITANCE IN µF
 INDUCTANCE IN µH

TOLERANCES		SCALE
ALL	DEC DIM ± .05	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED
OTHERS	FRAC DIM ± 1/64	
	ANGULAR DIM ± 0°30'	

MTR-100A			30 Nov 68
MODEL	PROJECT NO.	ASSY. NO.	DATE
USED ON			

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		SCHEMATIC	
WEIGHT PER PC		PREAMPLIFIER	
TYPE & TEMPER		DESIGNED BY Proctor	CHECKED BY CSC
HEAT TREAT. SPEC.		DATE 30 Nov 68	
FINISH & DRAG NO.		CK10771 C	