


REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD.	20 DEC 72			MMX	SDW
A		REV PER CEMN	15 MAR 73	1210		JMM	YFL

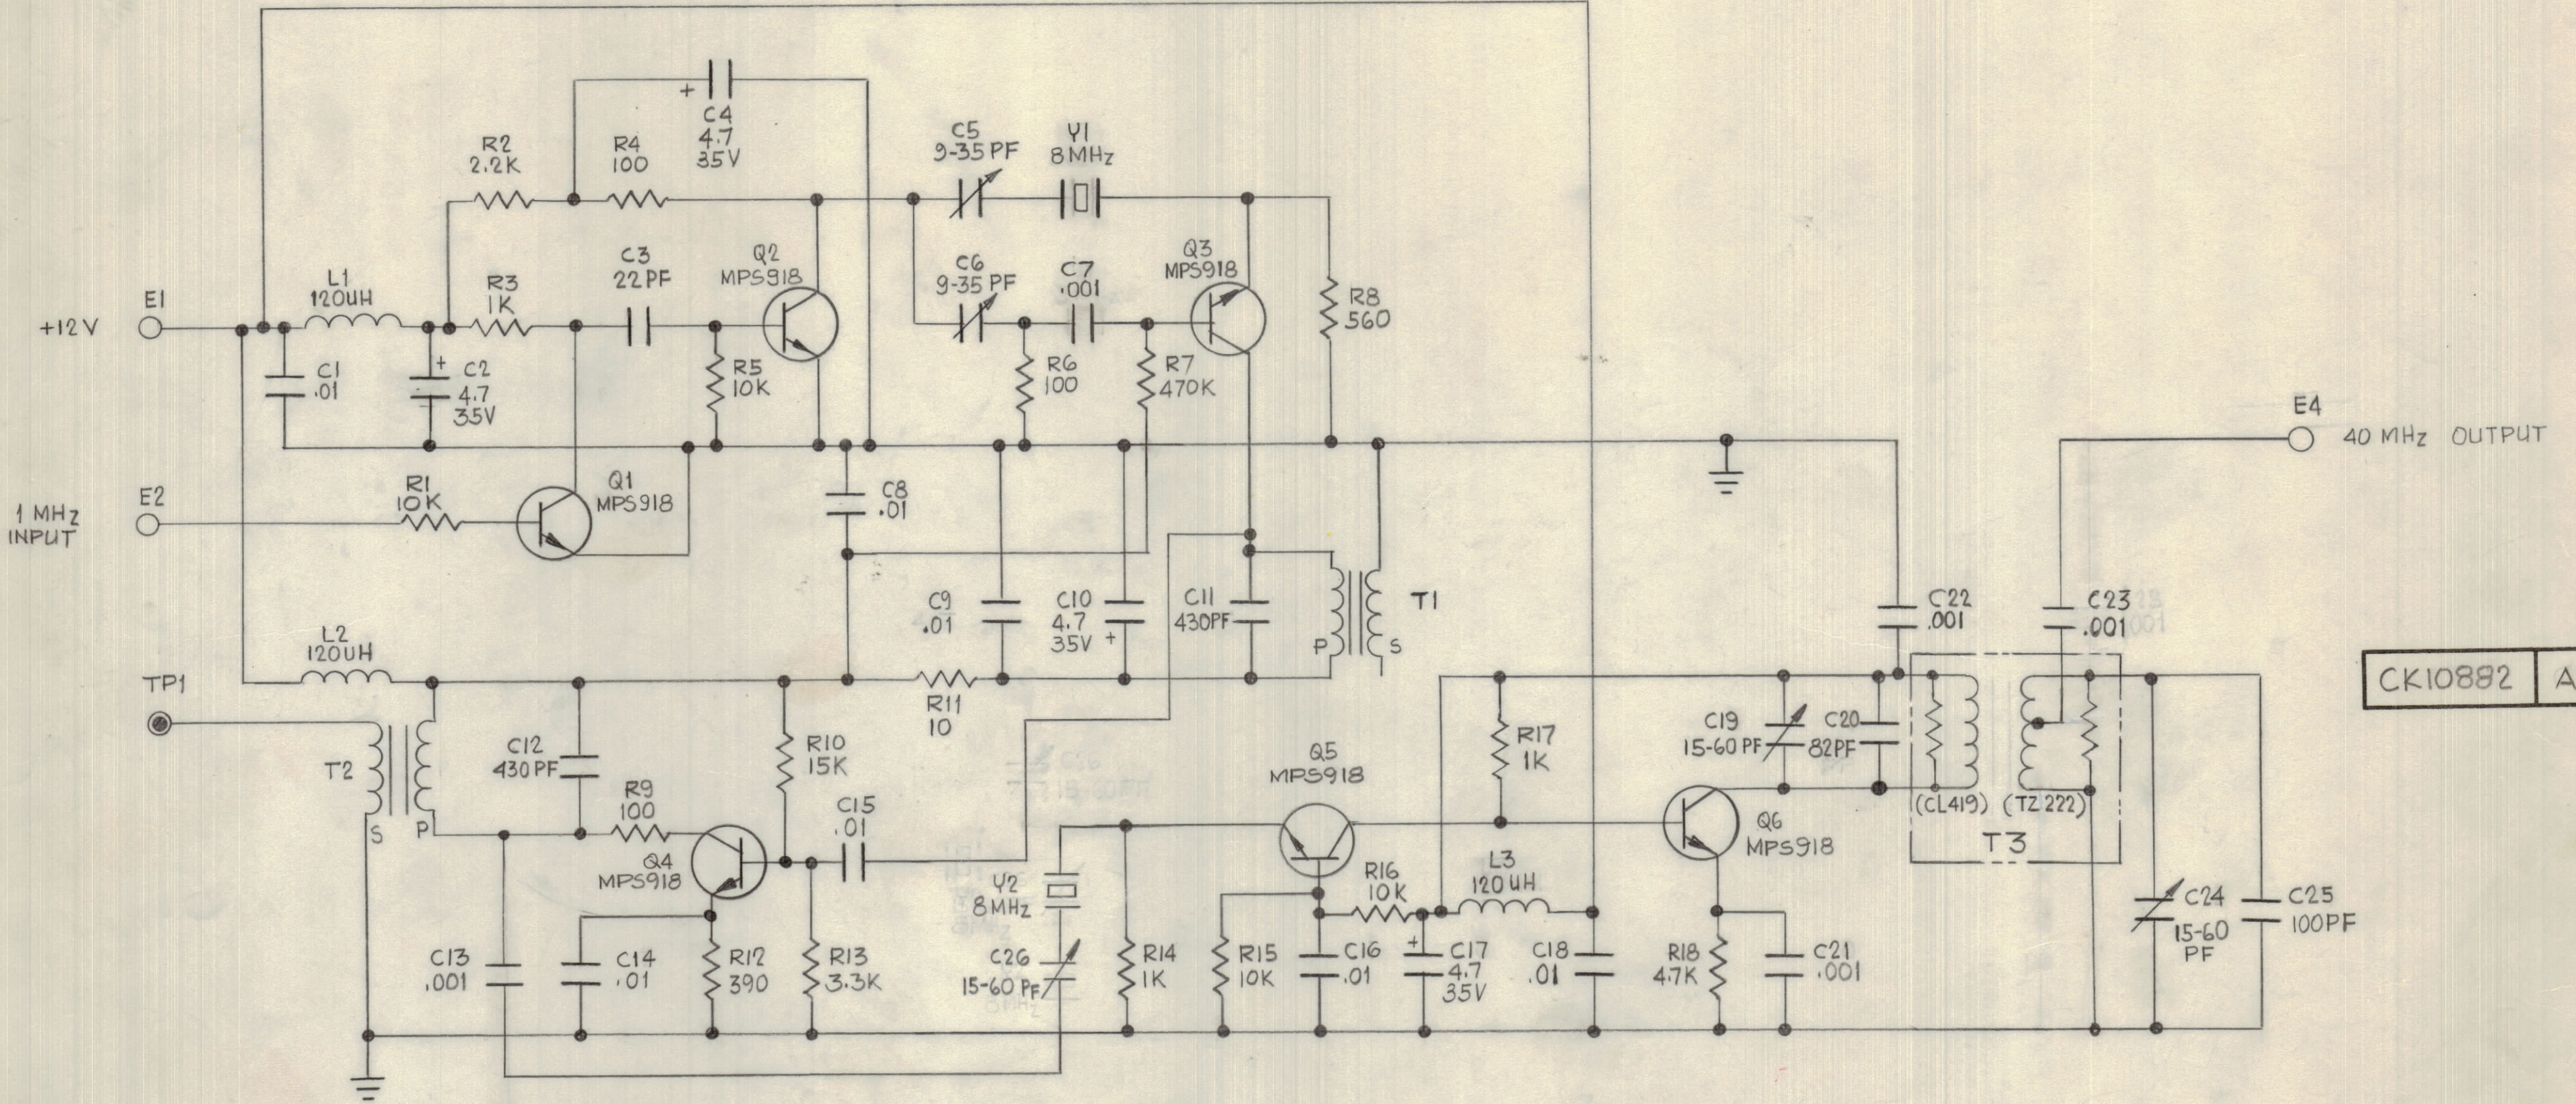

CK10882 A

LAST SYMBOL USED	UNUSED SYMBOLS
C26, R18, Q6, L3	
T3, Y2, E3	

1. UNLESS OTHERWISE SPECIFIED:  
RESISTANCE IN OHMS, 1/2 WATT.  
CAPACITANCE IN MICROFARADS.

NOTES:

A7A1

TOLERANCES		SCALE:
ALL OTHERS	DEC. DIM. ± .XX FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

MMX ( ) 3	110/71	A 110-77-5	20 DEC 72
MODEL	PROJECT NO.	ASS'Y. NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		SCHEMATIC DIAGRAM	
WEIGHT PER PC.		40 MHz REF. GEN. P.C.B.	
TYPE & TEMPER.	DRAWN	SWITTEN	MECH. DES. APP.
HEAT TREAT. SPEC.	Y.F. LEE	S. WITTEN	FINAL APPROVAL
FINISH & SPEC. NO.		CK10882 A	