


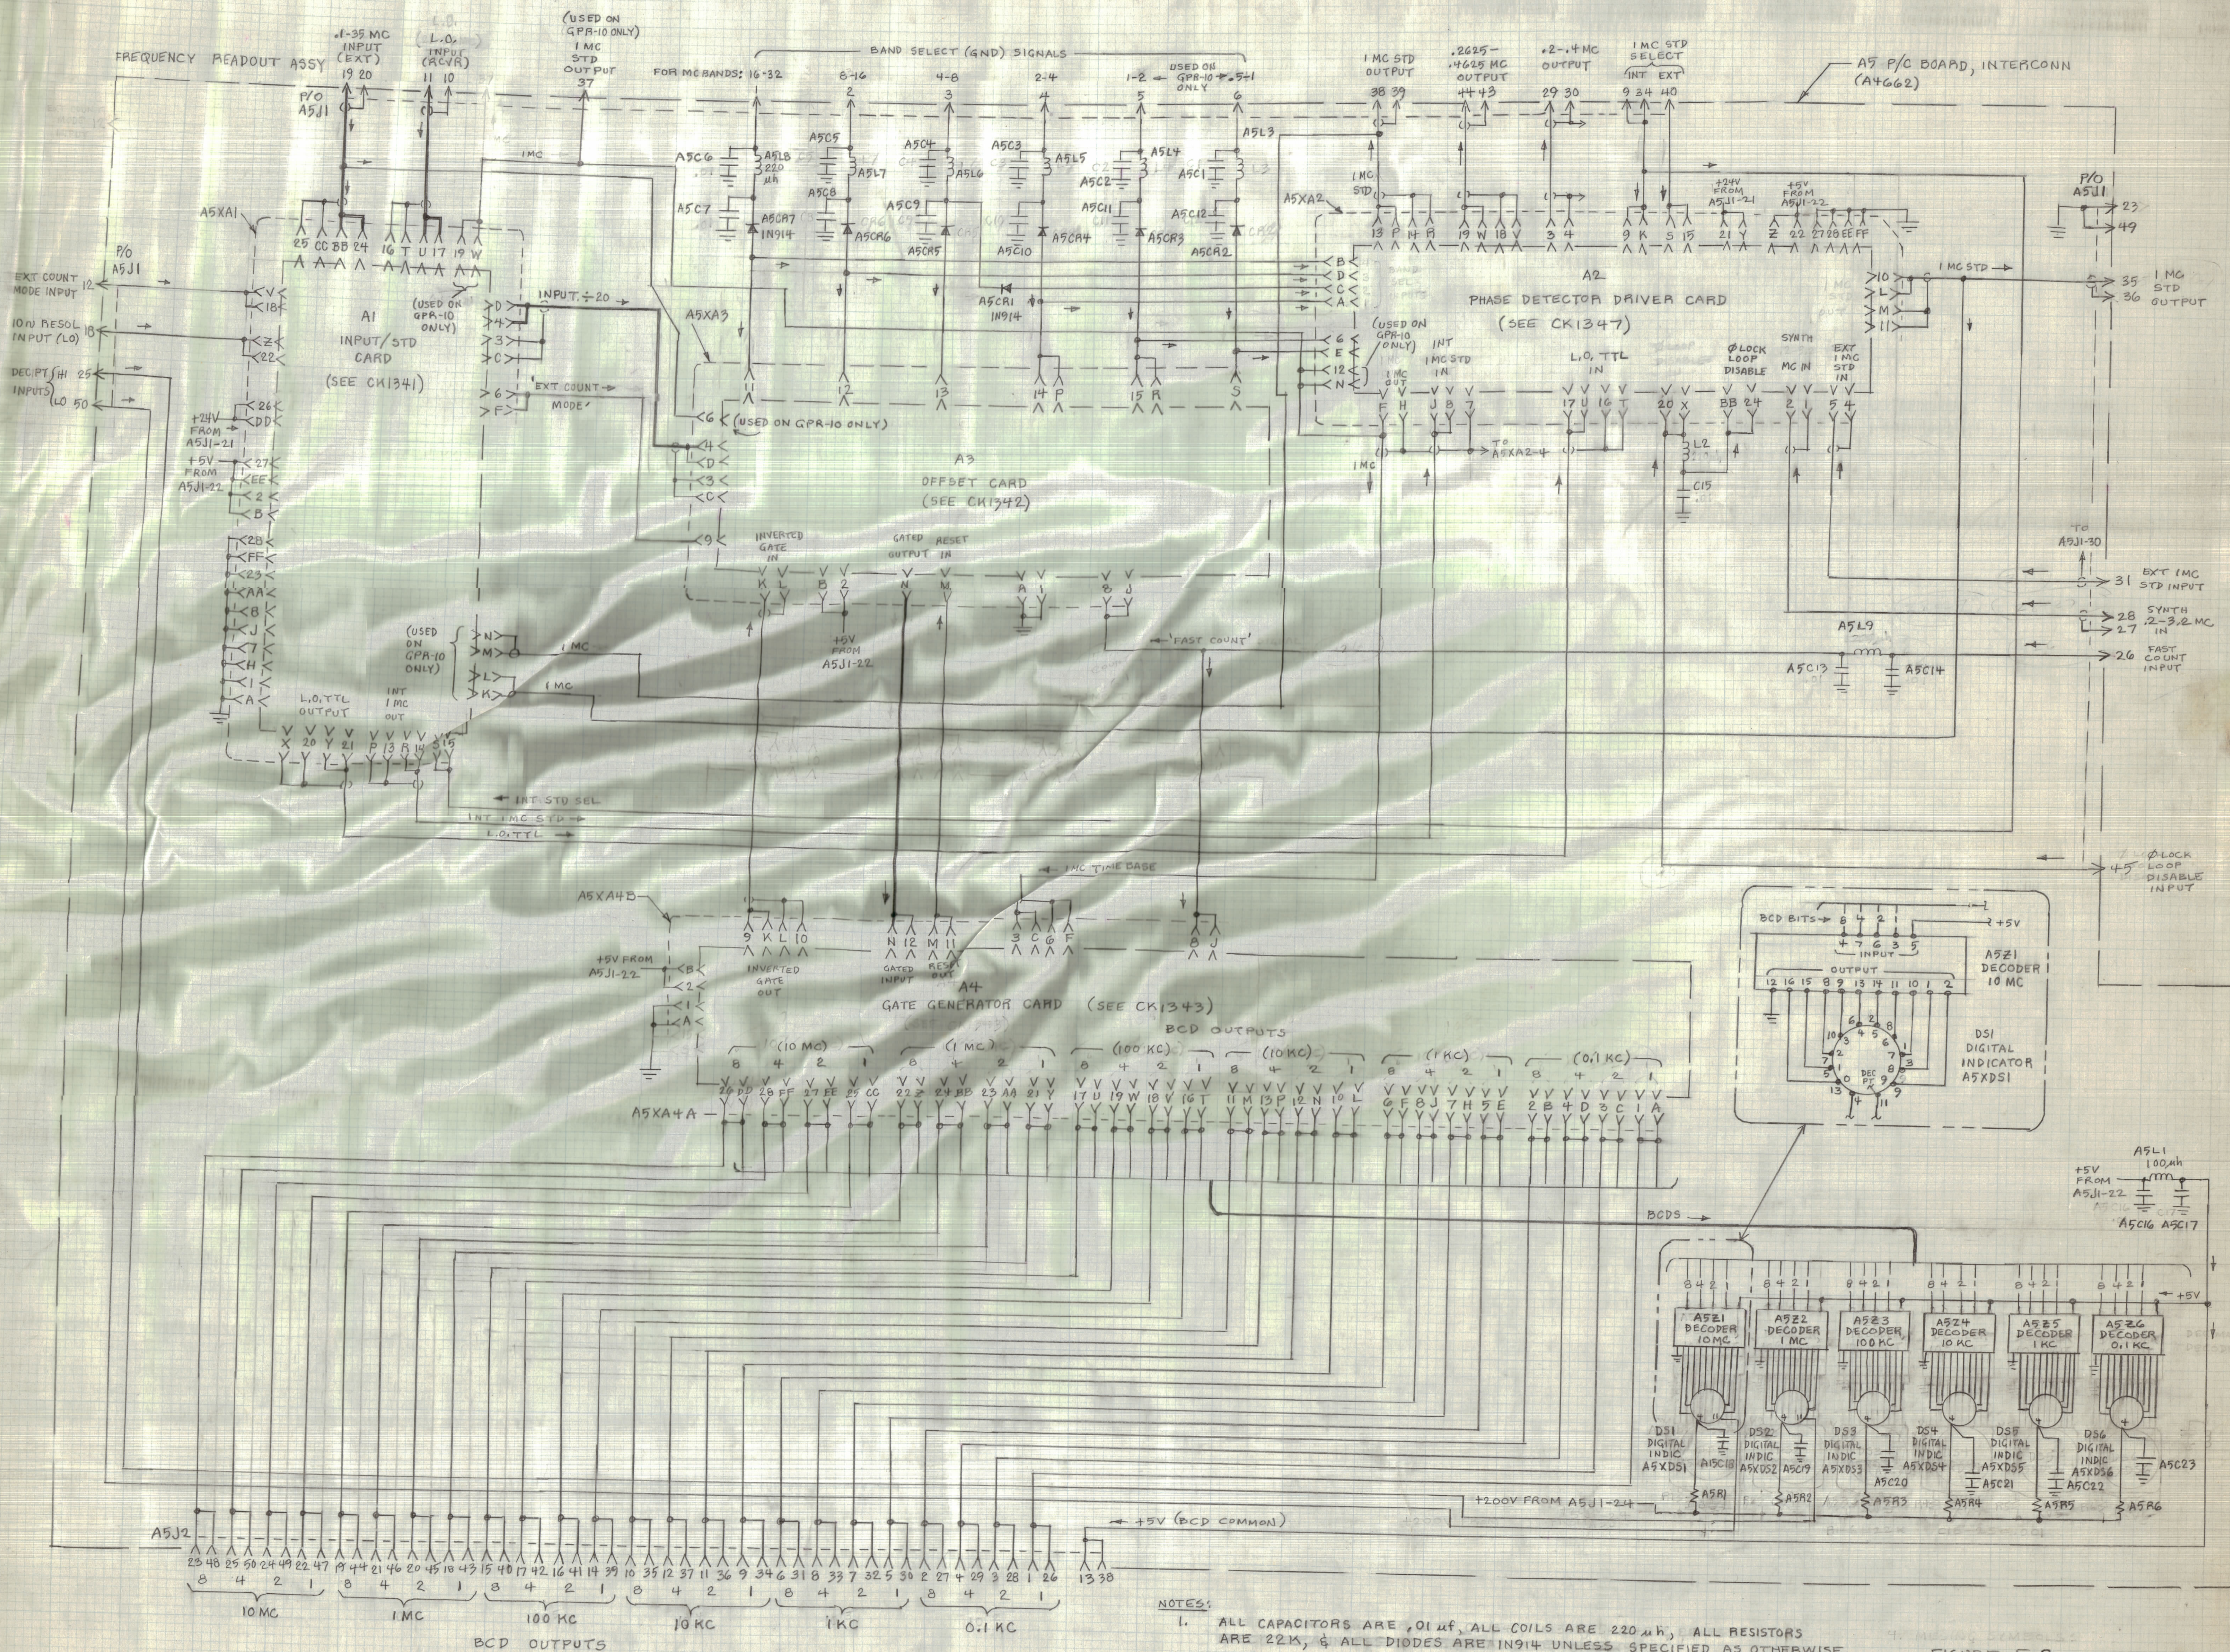

NOTES:

1. ALL CAPACITORS ARE .01 μ F, ALL COILS ARE 220 μ H, ALL RESISTORS ARE 22K, & ALL DIODES ARE 1N914 UNLESS SPECIFIED AS OTHERWISE.
2. PARTIAL REFERENCE DESIGNATIONS ARE SHOWN; FOR COMPLETE DESIGNATION, PREFIX WITH UNIT NUMBER AND SUBASSEMBLY DESIGNATIONS AS APPLICABLE.
3. LAST SYMBOLS USED: A5, A5C23, A5C17, A5L9, A5L9, A5R6, A5XA4B, A5XDS6, A5Z6, D5G.
4. HEAVY LINES INDICATE PATH OF FREQUENCY COUNT.

FIGURE 5-8.

(SKETCH FOR CK1344) WIRING SCHEMATIC, AX5003 FREQ. READOUT ASSY

C. Mangari 12/6/67
Revised 12/6/68