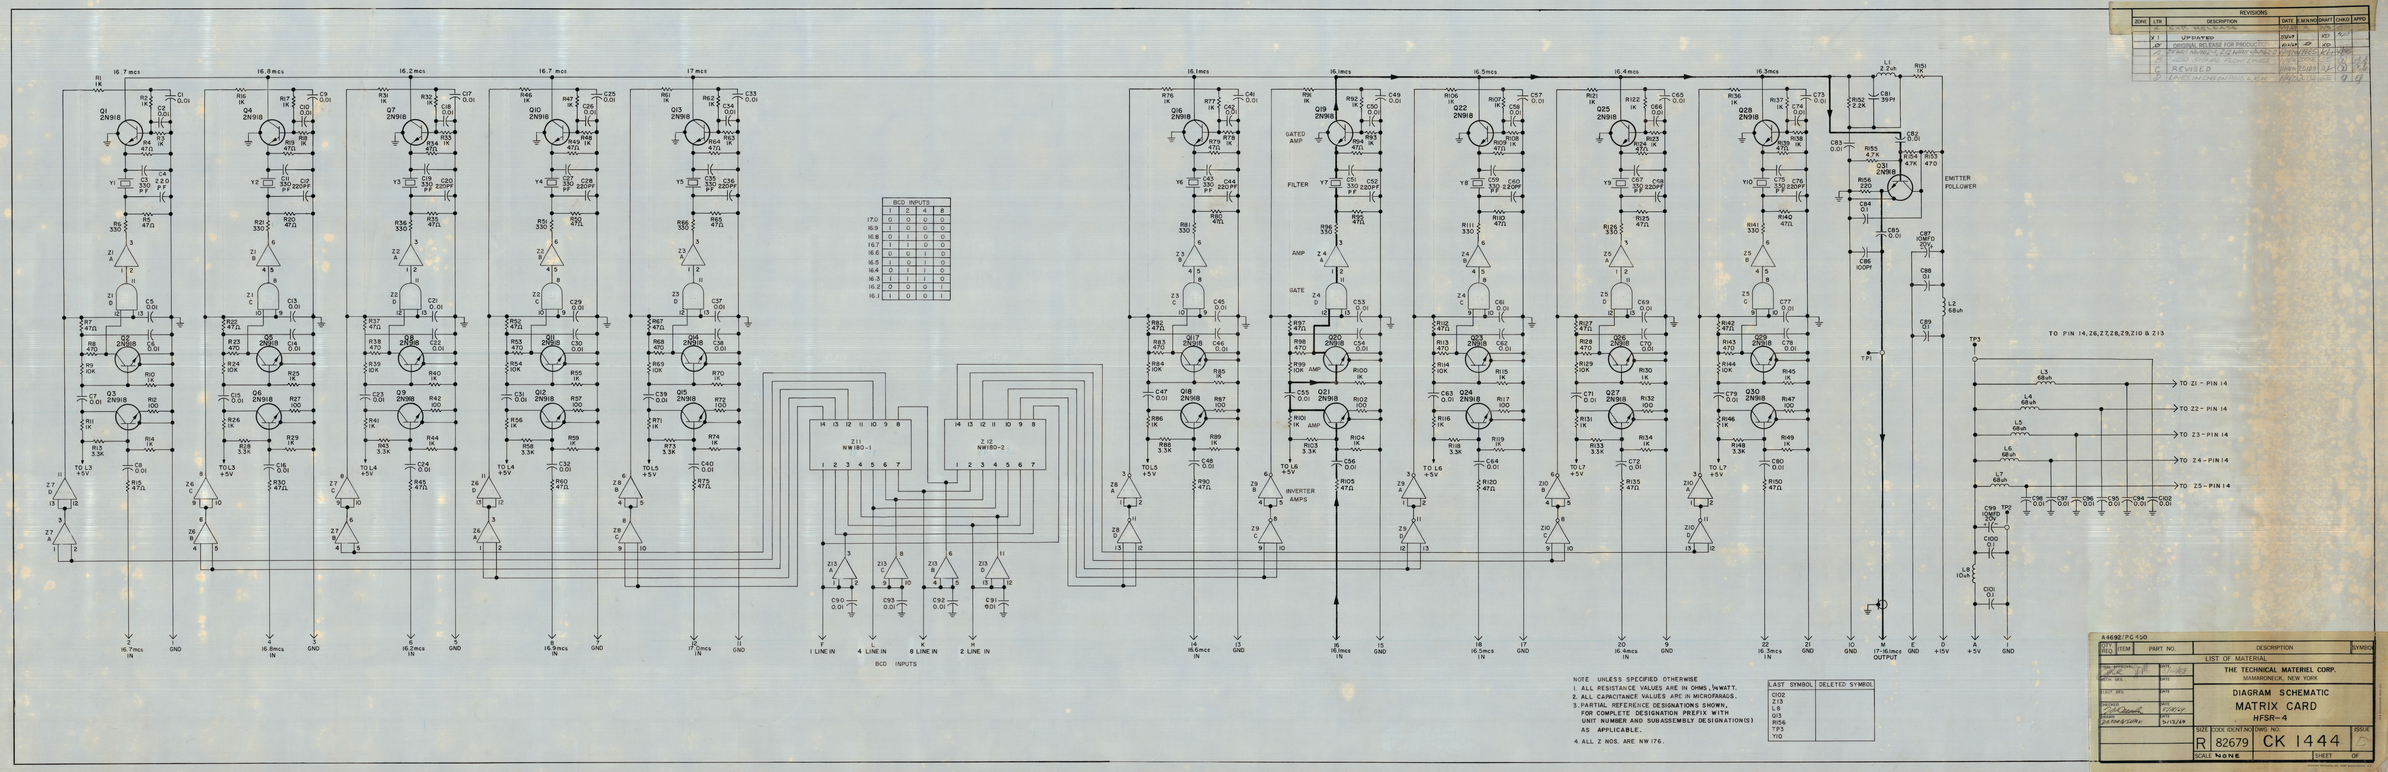

BCD INPUTS	1	2	4	8
17.0	0	0	0	0
16.9	1	0	0	0
16.8	0	1	0	0
16.7	1	1	0	0
16.6	0	0	1	0
16.5	1	0	1	0
16.4	0	1	1	0
16.3	1	1	1	0
16.2	0	0	0	1
16.1	1	0	0	1

NOTE UNLESS SPECIFIED OTHERWISE
1. ALL RESISTANCE VALUES ARE IN OHMS, ¼WATT.
2. ALL CAPACITANCE VALUES ARE IN MICROFARADS.
3. PARTIAL REFERENCE DESIGNATIONS SHOWN, FOR COMPLETE DESIGNATION PREFIX WITH UNIT NUMBER AND SUBASSEMBLY DESIGNATION(S) AS APPLICABLE.
4. ALL Z NOS. ARE NW176.

LAST SYMBOL	DELETED SYMBOL
C102	
Z13	
L8	
Q13	
R156	
TP3	
Y10	

REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	DR/ENG	DRAFT	CHKD	APPD
		ECO 2-1-1 REVISED PER ECO 2-1-1					
	A	UPDATED	10/69		KD		
	B	ORIGINAL RELEASE FOR PRODUCTION	8/69	JP	KD		
		ECO 2-1-1 REVISED PER ECO 2-1-1	10/19/69		KD	10/19/69	
		ECO 2-1-1 REVISED PER ECO 2-1-1	11/17/69		KD	11/17/69	
		ECO 2-1-1 REVISED PER ECO 2-1-1	12/19/69		KD	12/19/69	
	C	REVISED	1/19/70		KD	1/19/70	
	D	UPDATED PER ECO 2-1-1 REV. C	4/9/70		KD	4/9/70	

A16692/PC-150

REQ	ITEM	PART NO.	DESCRIPTION	SYMBOL
			LIST OF MATERIAL	

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

DRAWN: J.P. 5/13/69
MATL. SPE. — DATE
TEST SPE. — DATE
APPROVED: 5/13/69

DIAGRAM SCHEMATIC
MATRIX CARD
NFSR-4

SIZE R | CODE IDENT NO. 82679 | DWG NO. CK 1444 | ISSUE

SCALE NONE | SHEET OF