
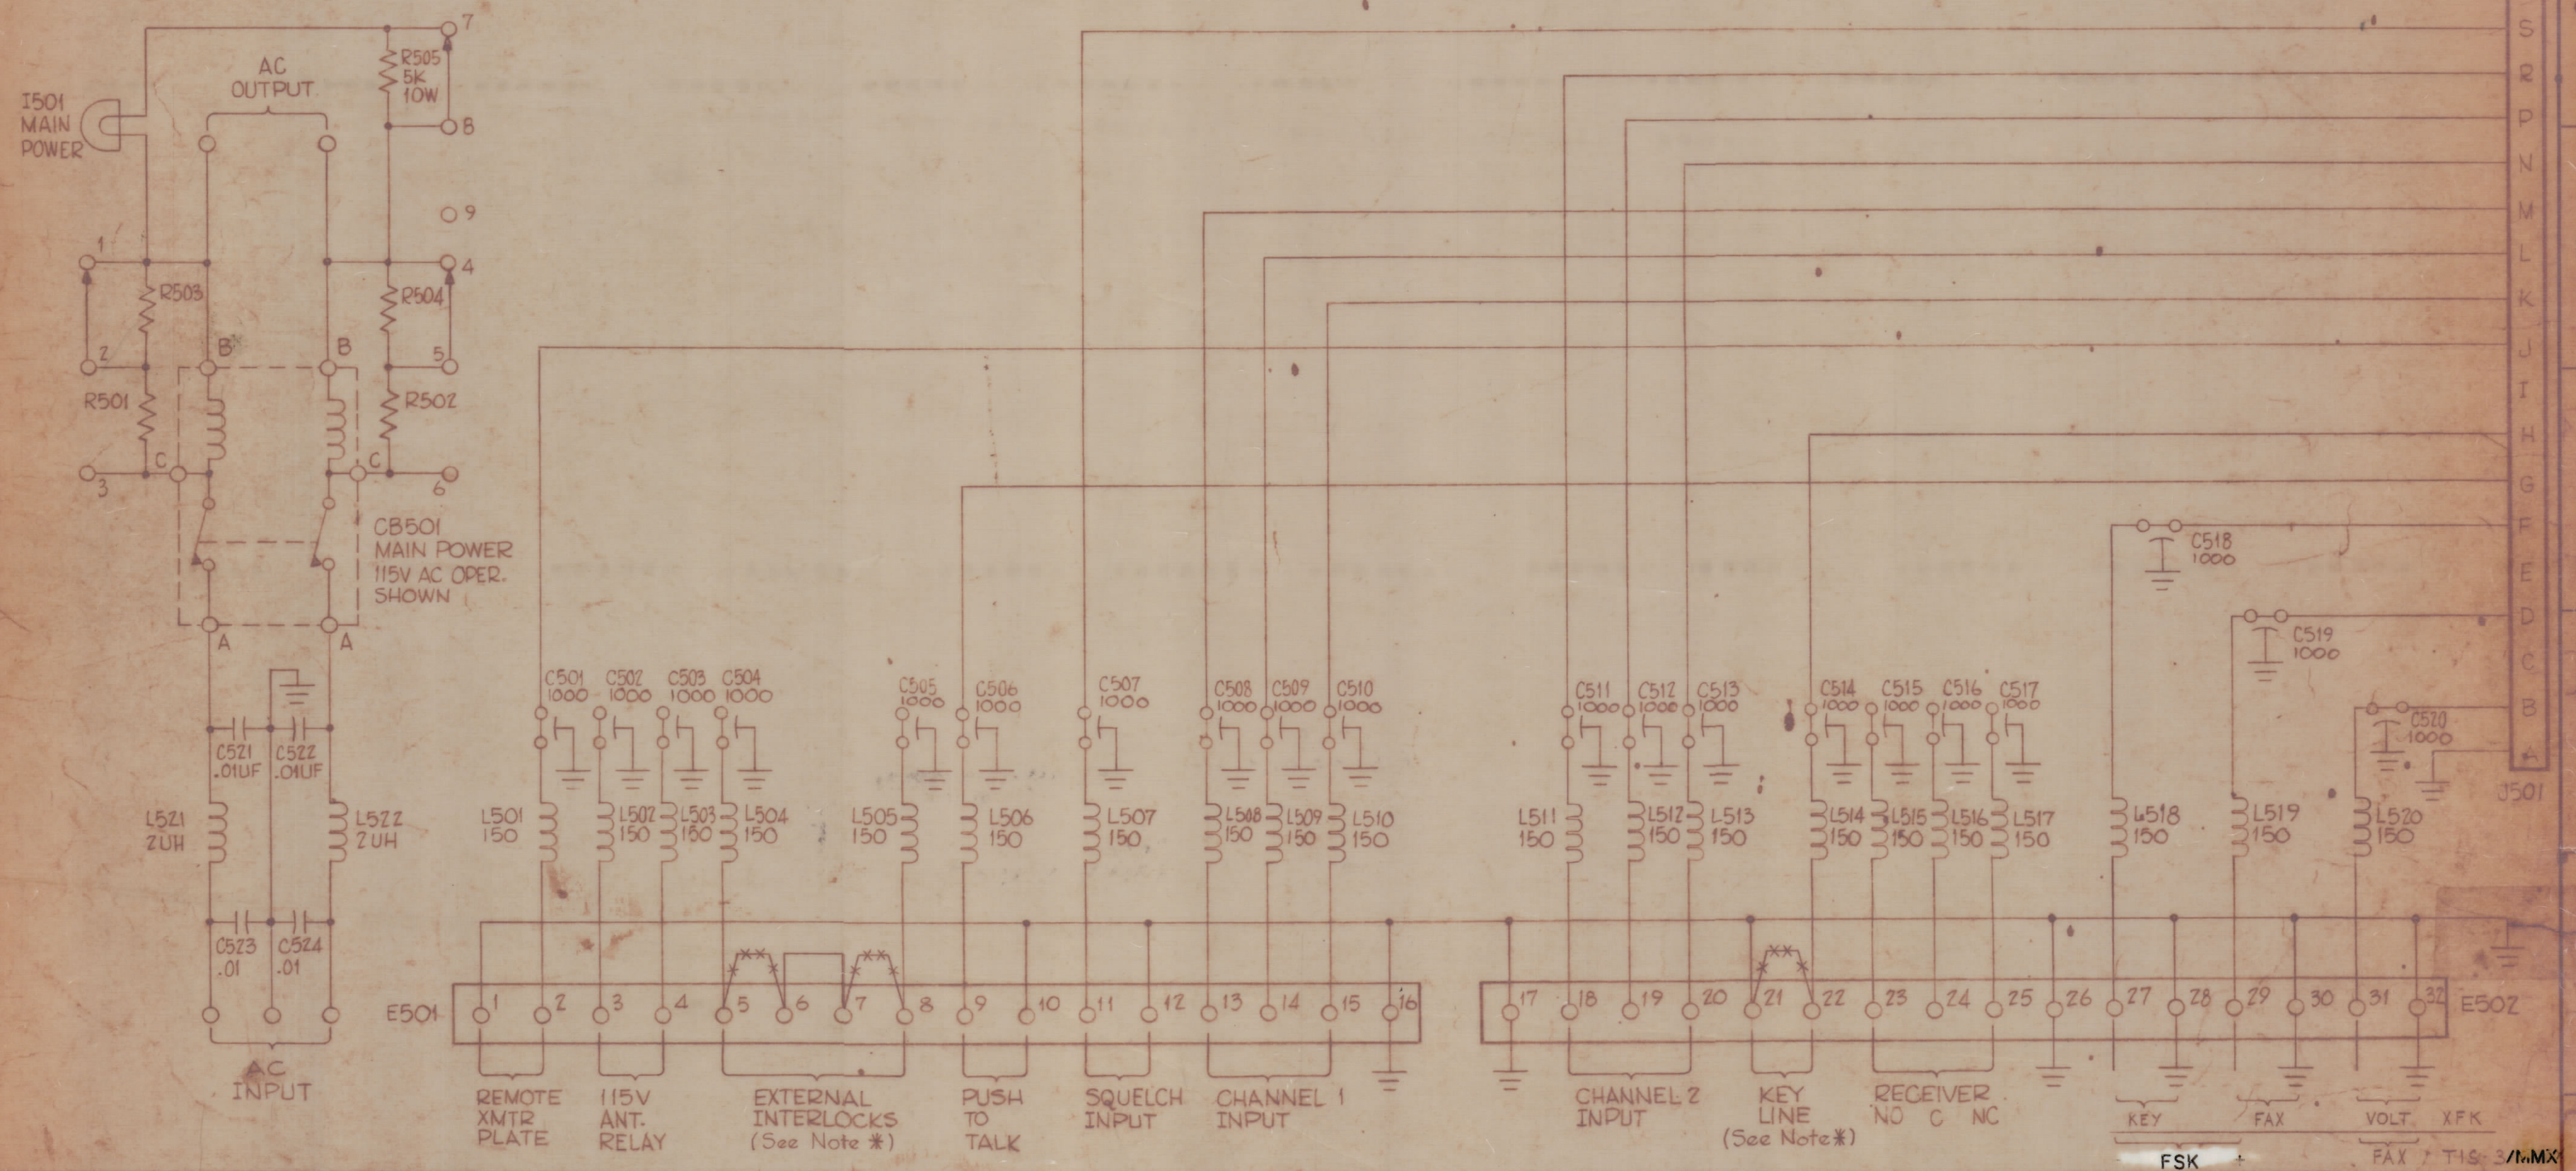


FOR 230VAC OPERATION OF CB-501

- 1- REMOVE STRAP MARKED → FROM TERMINAL 1, AND ATTACH TO TERMINAL 3.
- 2- " " " " " " 4, " " " " 6.
- 3- " " " " " " 7, " " " " 9.

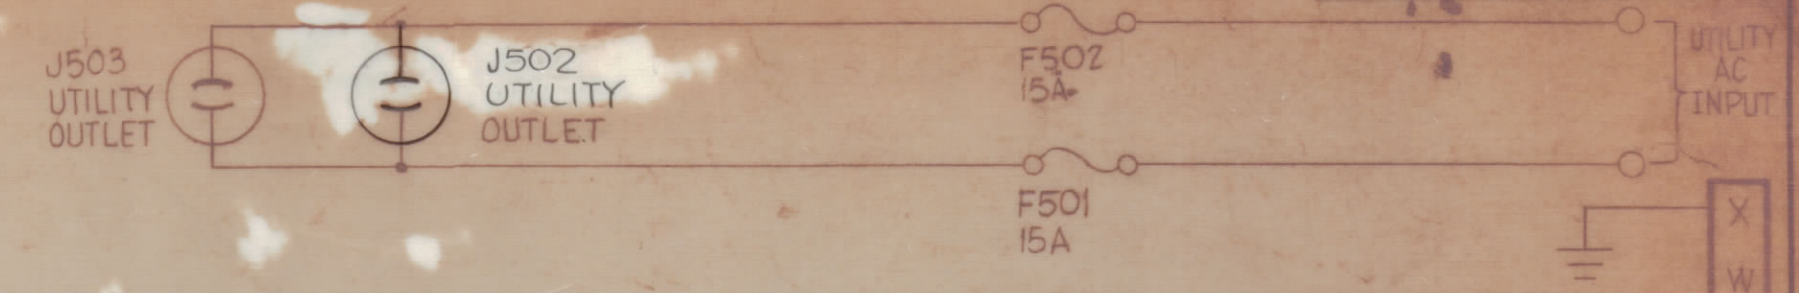

UNLESS OTHERWISE SPECIFIED:			SCALE				
DIMENSIONS ARE IN INCHES			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS & SHARP EDGES				
TOLERANCES ON							
FRACTIONS ± 1/64			DECIMALS ± .005				
ANGLES ± 1/2°							
SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
D	B-1	REVISED & UPDATED	2-7-69	19245	GE.	JDe	FR
C	C3,5	Jumpers Added for External Interlock w/ Keyline Oper.	11-28-68	4000	BYM	JCS	RL
B	B1	FAX & TIS-2 ADDED	1-11-61	3884	MAF	POB	JRM
B	B2	RECT. SYM + WIPED KEY ADDED TO TERMINALS 21 & 22					
B	B3	RECT. SYM + WIPED KEY ADDED TO TERMINALS 27, 28 & 29					
B	B4	RECT. SYM ADDED TO TERMINALS 27, 28, 29 & 30					
A	A2	UNDER LAST SYMBOLS T503 WAS T509					
A	A3	T502 WAS T504					
A	A1	J501 WAS T509	1-4-61	3841	MAF	JCS	RL

LAST SYMBOLS	MISSING SYMBOLS
C524	
CB501	
E502	
I501	
J503	
L522	
R505	
NOTE: * WHEN EXTERNAL INTERLOCKS AND/OR KEYLINE IS USED REMOVE JUMPERS MARKED *** FROM TERMINALS 5 & 6, 7 & 8 AND 21 & 22.	
REQ. PER UNIT	USED ON
APP-4	12-8-60
MODEL	SECTION
	ASSEMBLY NO.
	DATE

UNLESS OTHERWISE SPECIFIED:  
ALL CAPACITORS ARE IN MICRO-MICROFARADS.  
ALL COILS ARE IN MILLIHENRIES.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
SCHEMATIC DIAGRAM (MODEL APP-4)			
DRAWN		CHECKED	
TYPE & TEMPER		HEAT TREAT. SPEC.	
FINISH & SPEC. NO.		ELEG. DES. APP.	
		MECH. DES. APP.	
		SHEET OF	
		CK-467	