


NOTE —
OBSERVE DETAIL AT RIGHT BEFORE READING
ABOVE DIAGRAM.

4 5 2 3
23 24 25 26 27 28
DENOTES DIRECTION THAT
LEAD WILL TRAVEL.

B	DEL. CABLE BET. J3014 & E1. NOTE ADDED TO E1 (*)	9-26-63	10073	40			
A	C11 AX-347 WAS -12VDC	2-23-62	6418	G.S.			
SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED:			SCALE				
DIMENSIONS ARE IN INCHES			A				
TOLERANCES ON			MAXIMUM ALLOWABLE TOLERANCES HAVE				
FRACTIONS ± 1/64			DECIMALS ± .005				
ANGLES ± 1/2°			REMOVED ALL BURRS & SHARP EDGES				

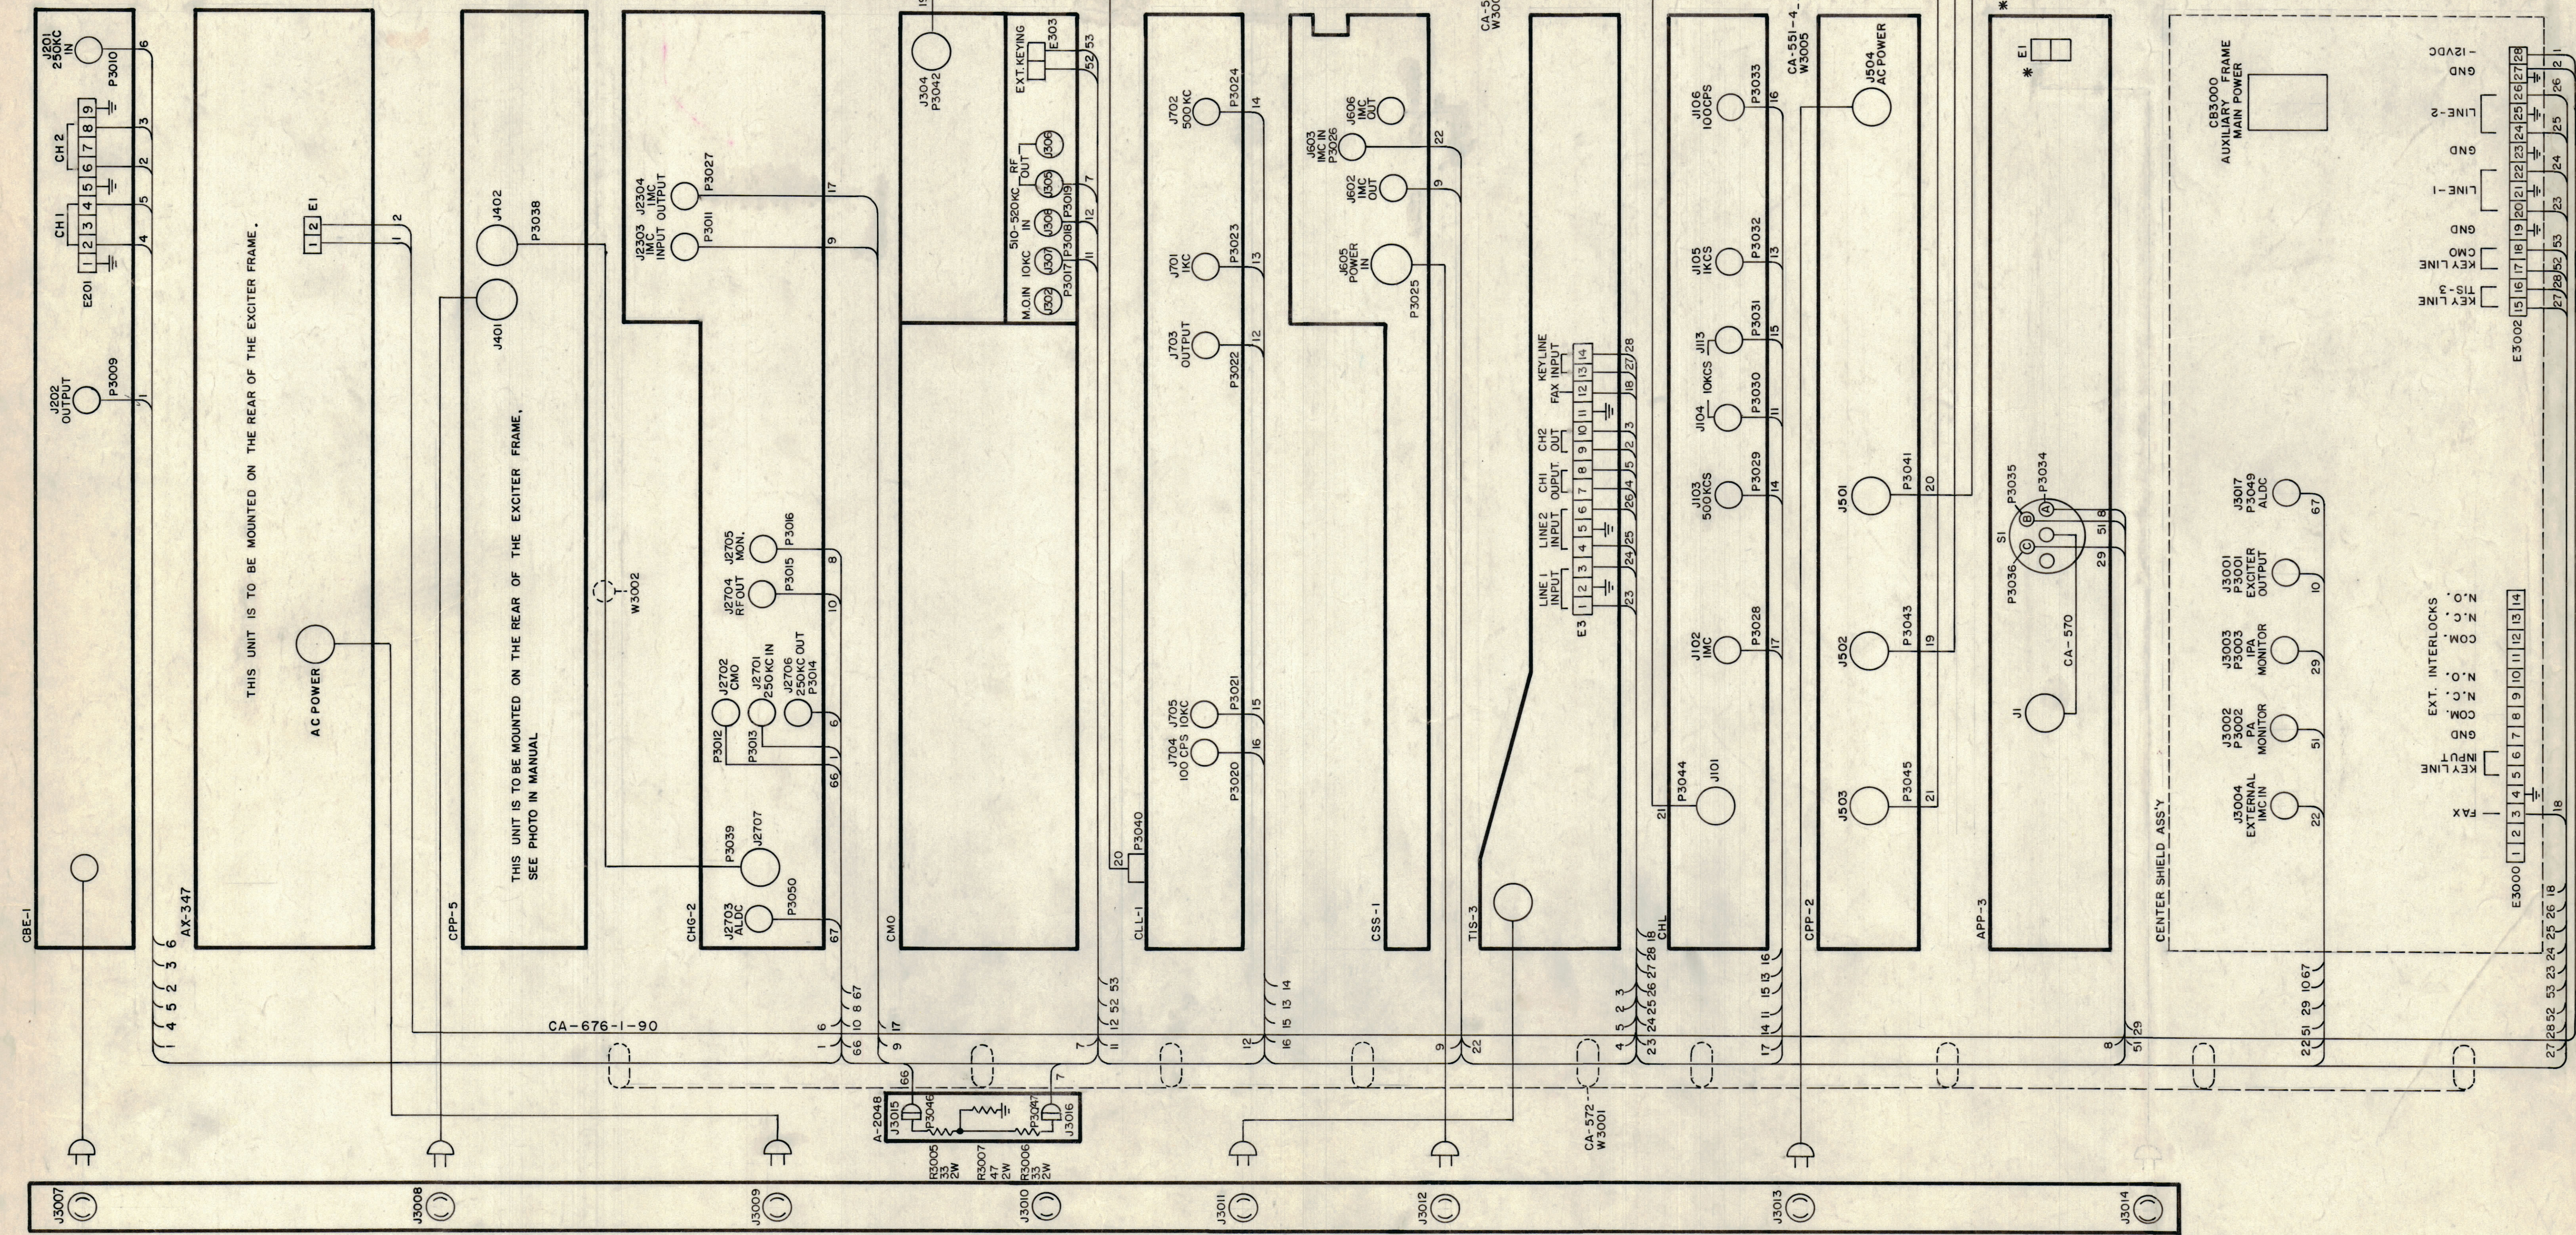

REQ. PER UNIT	MODEL	SECTION	ASSY. NO.	DATE
1	GPT-10K()			1-25-62
USED ON				

REG. ITEM	PART NO.	DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
WIRING DIAGRAM, EXCITER FRAME, SYNTH			
DRAWN	CHECKED	FINAL APPROVAL	
GD L	RUZZO		
TYPE & TEMPER.		HEAT TREAT. SPEC.	
ELEC. DES. APP. MECH. DES. APP. SHEET OF			

CK-564 B