


ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
X		ENG. RELEASE	6 JUNE 72		VVR		<i>[Signature]</i>	X	1	WI123-26	WIRE, MAGNET	
X	1	ITEM 2 CHANGED FROM CI10015-CF108-Q2	12 OCT 72		C.C. B.M.			1	2	CI10011-1-01	CORE, TOROID	
								X	3	GL104-2	INSULATING VARNISH	

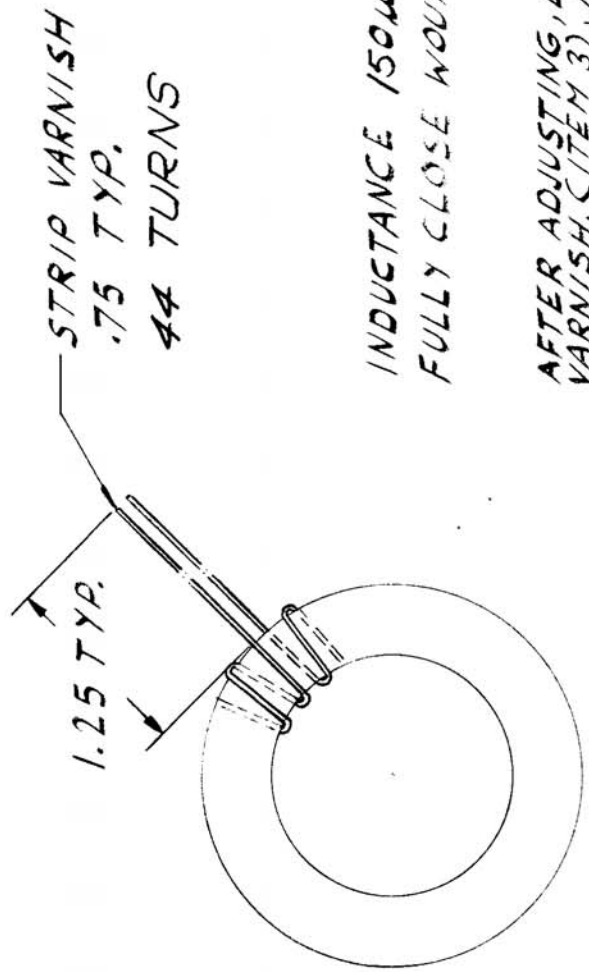

STRIP VARNISH
.75 TYP.
44 TURNS

INDUCTANCE 150μH ± 10%
FULLY CLOSE WOUND CORE

AFTER ADJUSTING, DIP IN INSULATING VARNISH, (ITEM 3), AND BAKE FOR ONE HOUR AT 125°C AND COOL AT -20°C FOR ONE HOUR
NOTE:

LPA-400		PROJECT NO.	A11045-5	DATE	6 JUNE 72	TMC (Canada) LIMITED OTTAWA ONTARIO	
MODEL		USED ON				COIL, RF	
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION REMOVE ALL BURRS AND SHARP EDGES		IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.				DRAWN J. VAN RHEE	
TOLERANCES		SCALE 4:1				ELEC. DES. APP. L. BROWN	
DEC. DIM. 1.015		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED				MECH. DES. APP.	
FRAC. DIM. ± .001		DRILL: PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.				CHECKED	
ANGULAR DIM. ± 0'30"						FINAL APPROVAL	
ALL OTHERS						CL 100 63 X1	