REQ. PER UNIT	USED ON			CL-230	
	M DEL	ASS'Y. NO.	DATE		
			5-6-60		

MODEL	QUANTITY	FUNCTION	SYMBOL
GPR-90RXD	1	BFO Plate Coil	L37

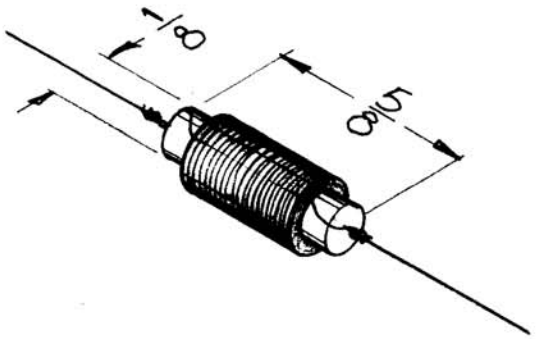

— SPECIFICATIONS —

INDUCTANCE ~ 370 MICROHENRIES.
Q ~ 70 or GREATER.
FREQ. (TEST) ~ 790 KC.
CORE ~ POWDERED IRON.
WIRE ~ #36 DOUBLE SILK LITZ.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: 2A-1839

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

COIL, RF, FIXED, 370 uhy.

DRAWN	CHECKED	FINAL APPROVAL
		CL-230

ELEC. DES. APP | MECH. DES. APP

FORM 108-A