


SPECIFICATIONS

TMC PART NO.	L MAX	L MIN	"Q"	F	RANGE
CL 256	4.7 uh	3.7 uh	140 @ 4.6 uh	7.9 MC	4-8 MC
CL 256-2	7.7 uh	< 5.95 uh	763 @ 6.1 uh	7.9 MC	3.3-6.4 MC

REQ. PER UNIT	1
MODEL	RFD-1
USED ON	ASBY. NO.
DATE	10-24-64

CL-256 C

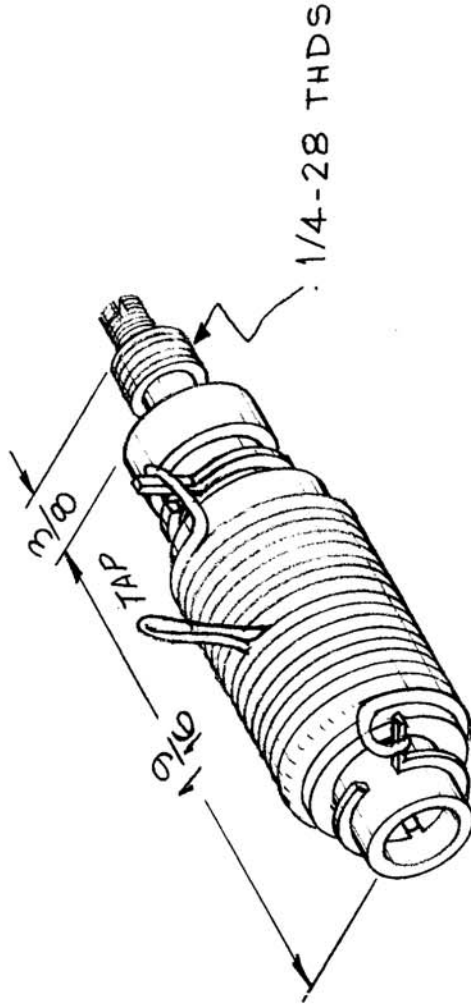

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		COIL, R.F. TUNED	
CHGD PART NO. & REPOSITIONING, CL 256 WAS 145 @ 4.1 uh	7-19-66	RME	907
LEGICAL CHANGE	7-5-66		908
SPECS. UPDATED	6/11/64	11546	A.M.
4-8 MC DELEFR TITLE	DATE	CH. NO.	DRAFTS
CHANGED FROM	1A-2002	CHECKER	ENG. APP.
TOLERANCES			
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES			
DEC. DIM. ±			
FRAC. DIM. ±			
ANGULAR DIM. ±			
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
		2.13	
FINISH & SPEC. NO.	ELEC. DES. APP. MECH. DES. APP.		
	CL-256 C		