


CL-268

USED ON  
ASSY. NO. DATE  
3-2-61

REQ. PER UNIT  
MODEL TER-3500-300

$\frac{5}{16}$  APPROX. SPACING (TYR)

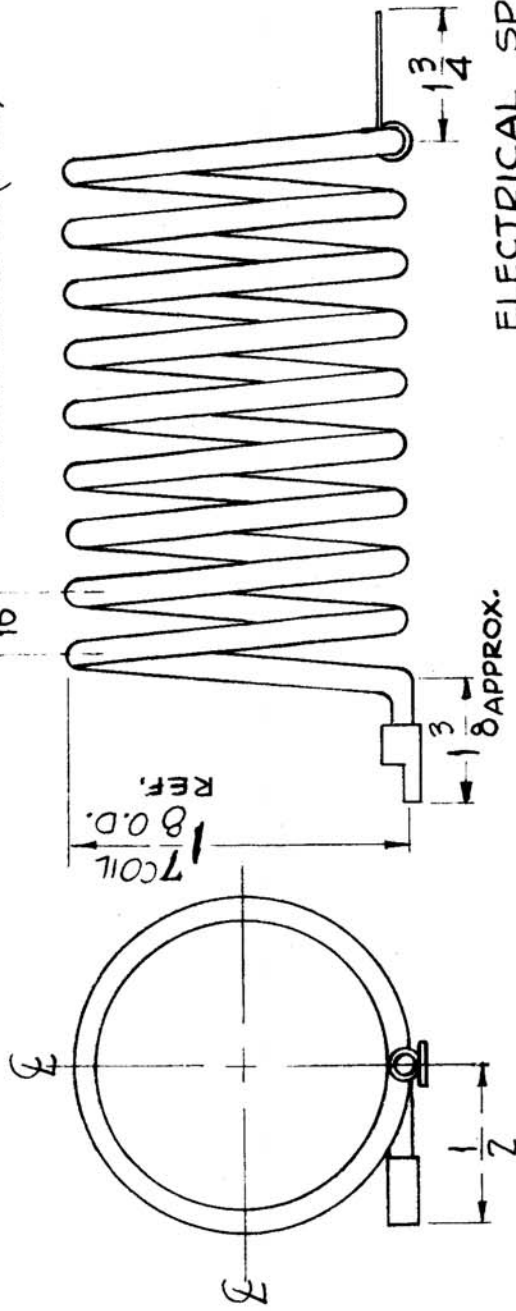

ELECTRICAL SPECIFICATIONS

$2.85 \mu h \pm 10\%$

$Q = 350$

$f_{REQ} = 7.5 Mc$

MECHANICAL SPECIFICATIONS

9 TURNS WOUND ON  $1\frac{1}{2}$ "

DIA. FORM.

FINISH: SILVER PLATE .0003 THK.

ISSUE ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
TOLERANCES DEC. DIM. $\pm$ FRAC. DIM. $\pm$ ANGULAR DIM. $\pm$							THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
SCALE: 1A-2055 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES							COIL, COMPENSATING 2.85 $\mu h$				
TYPE & TEMPER HEATTREAT.SPEC.							DRAWN: <i>D.P. Wagon</i> CHECKED: <i>JMB</i> FINAL APPROVAL: <i>CL-268</i>				
FINISH & SPEC. NO.							ELEC. DES. APP. MECH. DES. APP.				