SYMBOL	FUNCTION	OPER. FREQ.
L109	LOW PASS FILTER	2.52 MC

REQ. PER UNIT	USED ON			CL-322
	MODEL	ASS'Y. NO.	DATE	
1	GPR-92	A-2510	9/11/63	

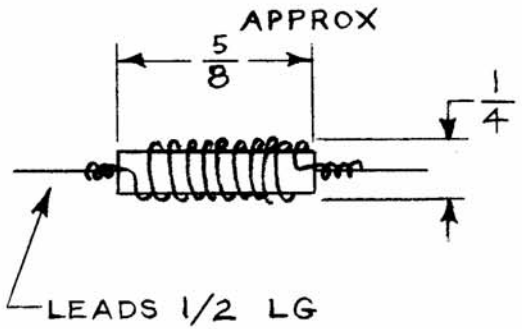

SCHEMATIC

WINDING DATA
- TURNS - 47
- DC RESISTANCE - (NOT RATED)
- INDUCTANCE - 17 μh ± 20%
- CURRENT - (NOT RATED)

CORE DATA
- QUANTITY - 1
- MATERIAL - POWDERED IRON (FIXED)

TERMINAL
- AXIAL LEADS
- QUANTITY - 2

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS
.X ± .05
.XX ± .01
.XXX ± .005

TOLERANCES

FRACTIONS ± 1/64
ANGLES ± 0° 30'

SCALE: NONE

CODE: 1A-3287

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			M. GELLMAN	

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

COIL, RF, FIXED

DRAWN	CHECKED	FINAL APPROVAL
N. Peters	10/7/63	
ELEC. DES. APP.	MECH. DES. APP.	CL-322

TMC FORM 108-A

STOCK NO. 440H