REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	CL376	B
1	CMRA-1	A4216	5-17-65		

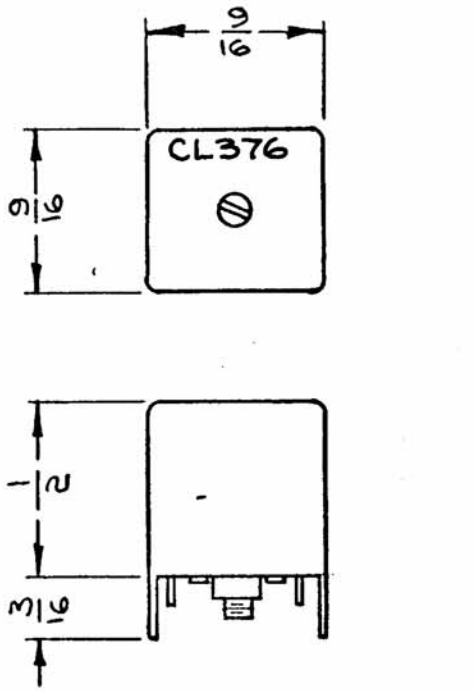

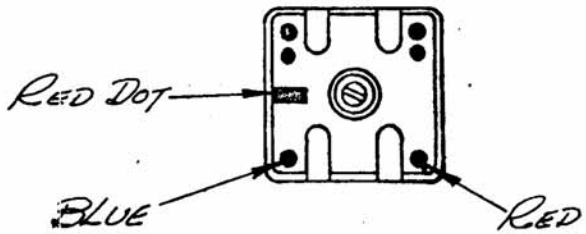

ELECTRICAL SPECS.
(W/O SLUG)

OPERATING FREQUENCY:
INDUCTANCE @ 6MHZ
PRIMARY: 1.5 μh ± 0.2 μh

"Q" (PRIMARY)@ 6mc MIN. 40

MECHANICAL SPEC.

TURNS
PRIMARY: 27

COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWDERED IRON



SCHEMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	"CL376" STAMPED ON TOP VIEW	12.8.66	17374	WW		
A	PRI. IND. WAS 2.0 uh CHGD. MC TO MHZ	7-18-66	16571	RME		
Ø	ORIGINAL RELEASE FOR PRODUCTION	5/21/65	--	HLA		
X	EXPER. RELEASE	5/17/65	X	HLA		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE

TOLERANCES
DECIMALS .X ±.05, .XX ± .01, .XXX ± .005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

2A4264

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			POSE	

STOCK SIZE —

MATERIAL —

TYPE & TEMPER — | HEAT TREAT. SPEC. —

FINISH & SPEC. NO. —

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL, RF, ADJ.
SYN-A-L5

DRAWN	CHECKED	FINAL APPROVAL
H.L.AUSTIN		

ELEC. DES. APP.	MECH. DES. APP.	CL376	B