REQ. PER UNIT	USED ON			CL389	A
	MODEL	ASS'Y. NO.	DATE		
2	LPF-750-3		3-23-66		

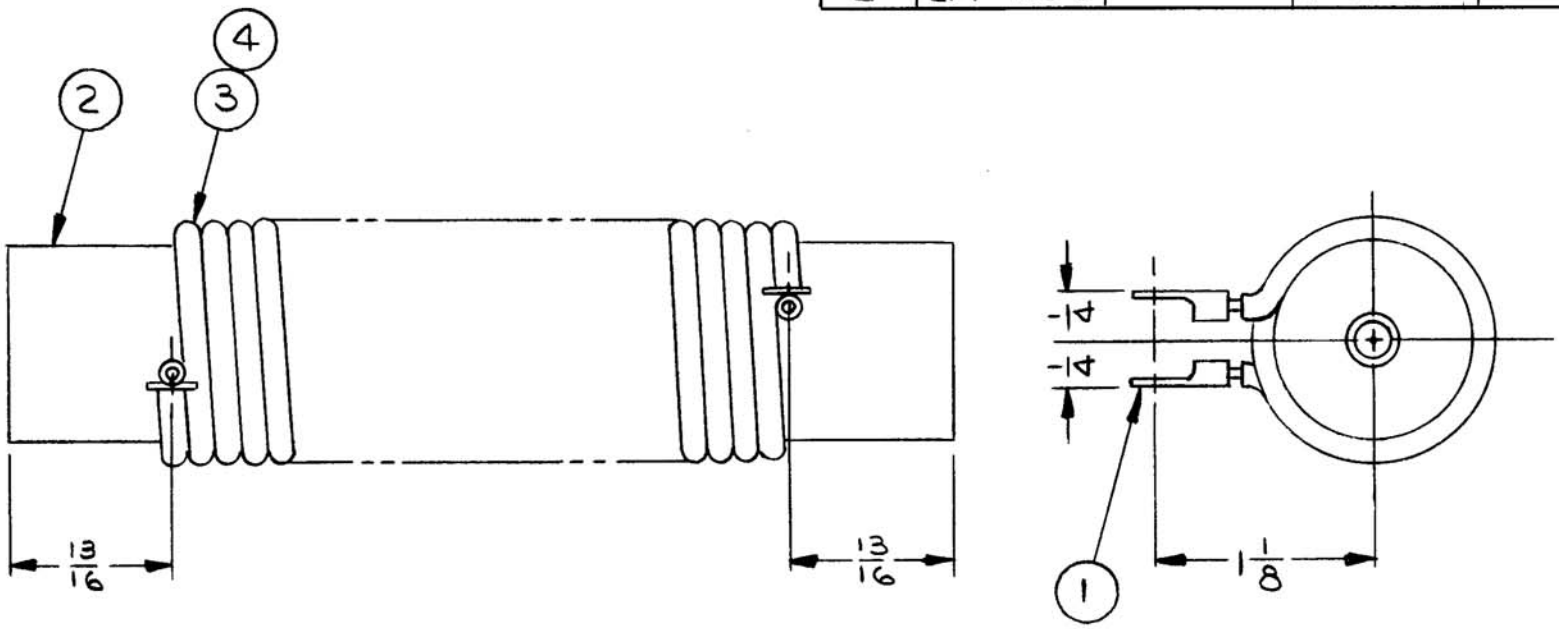

SPECIFICATIONS:

L= 3.68μh ± 0.05μh
Q= NOT REQ.
TURNS= 22

NOTE: CRIMP & SOLDER LUGS.

X	5	BS100	SOLDER, TIN ALLOY	
X	4	WL-100-2	WIRE, BUSS	
X	3	PX370-11-7	INSULATION, SLVG-TEFLON	
1	2	NS3W04-40	INSULATOR, STANDOFF	
2	1	TE141-1	TERMINAL LUG NO. 6	

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	IT 3 WAS PX370-9-7	11/19/71	20462	CW.	CS	CS
Ø	ORIGINAL RELEASE FOR PRODUCTION	3/25/66		C.V		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE —

TOLERANCES
DECIMALS .X ±.05 .XX ± .01 .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE

REQ.	ITEM	PART NO.	BAKER DESCRIPTION	SYMBOL

STOCK SIZE —

MATERIAL —

TYPE & TEMPER — HEAT TREAT. SPEC. —

FINISH & SPEC. NO. —

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL, FILTER, 2-3MC

DRAWN	CHECKED	FINAL APPROVAL
JL	3/23/66	

ELEC. DES. APP.	MECH. DES. APP.	
RJB		CL389 A

ML 3/25

TMC FORM 108-A

REPROVEL NO. 440H 23845