


STANDARD DRAWING

CP116

REVISIONS						
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
Ø	ORIGINAL RELEASE FOR PRODUCTION	3-18-66	Ø	WFW		

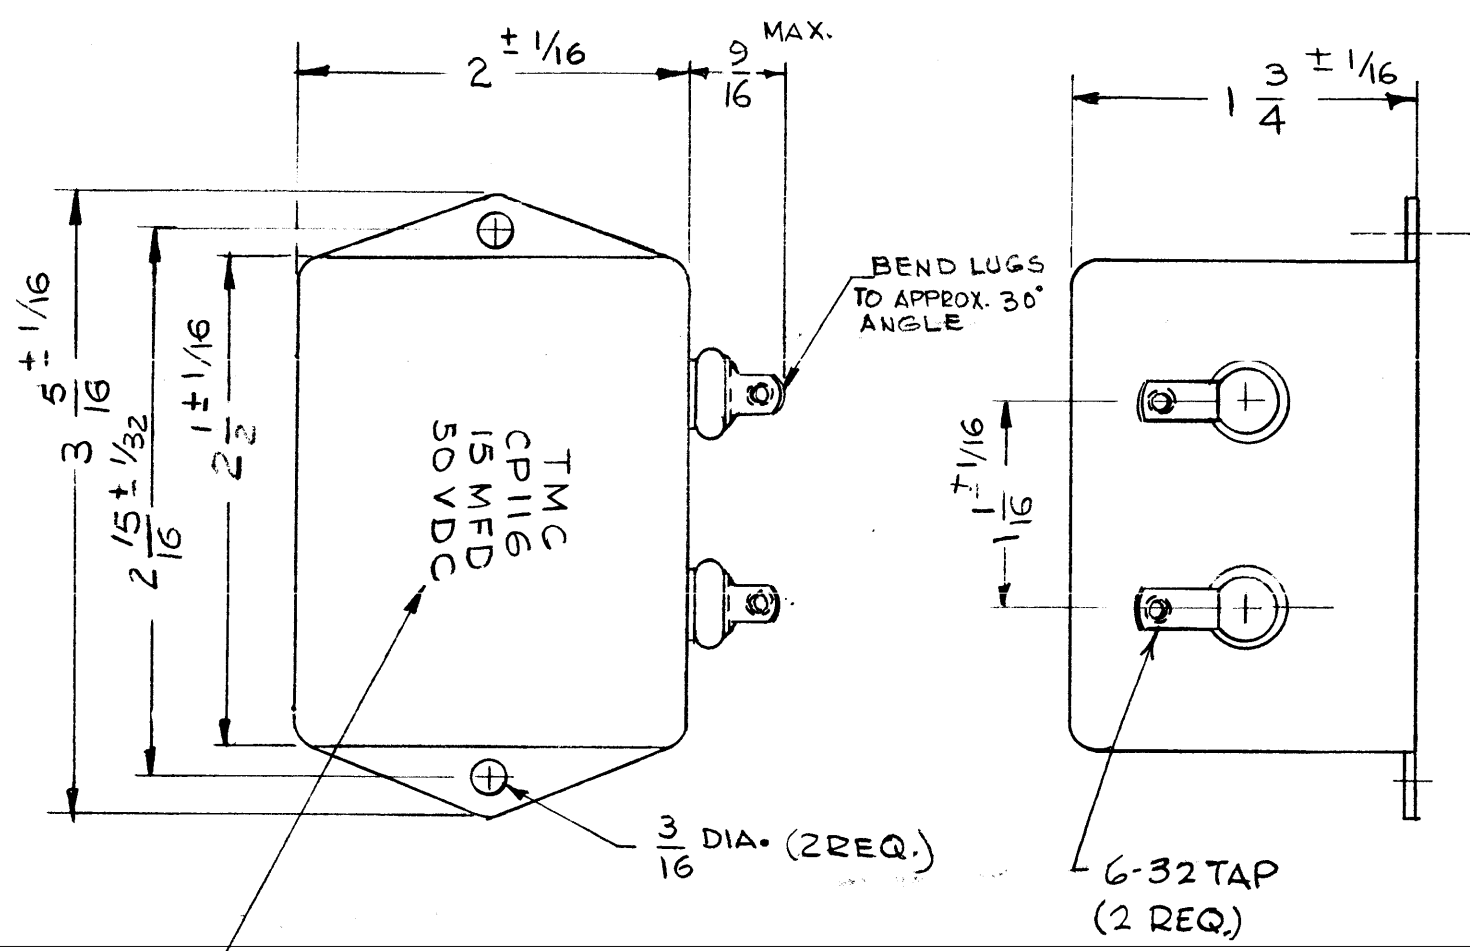

— SPECIFICATIONS —

- 1- CAPACITY : 15 MF $\pm 10\%$
- 2- WORKING VOLTAGE : 50 VDC
- 3- OPERATING TEMP : -55°C TO $+85^{\circ}\text{C}$
- 4- FLASH TEST : 100 VDC TERM. TO TERM. AND TERM. TO CASE
- 5- DIELECTRIC : MYLAR
- 6- D.F. : .6% AT 60 CPS AT 25°C
- 7- I.R. : 2000 MEGOHMS MIN. AT 25°C
- 8- METAL CASED, HERMETICALLY SEALED

STAMP 1/8 HIGH BLACK GOTHIC

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
BUDETTI LIST OF MATERIAL				
MATERIAL			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH			TITLE CAPACITOR, FIXED, PAPER	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			DRAWN G.D.L.	DATE 1-31-66
			CHECKED JCB	DATE 3-16-66
			ELECT. DES. aa	DATE 3-17-66
			MECH. DES.	DATE
			FINAL APPROVAL <i>[Signature]</i> CP116	
			SHEET	

4	GPT-10KLF	Ax
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE DO NOT SCALE	CODE	S401-112-178-5
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

NOTES