IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

STANDARD DRAWING

CT-100 F

USED ON			
MODEL	PROJECT NO.	ASS'Y. NO.	DATE

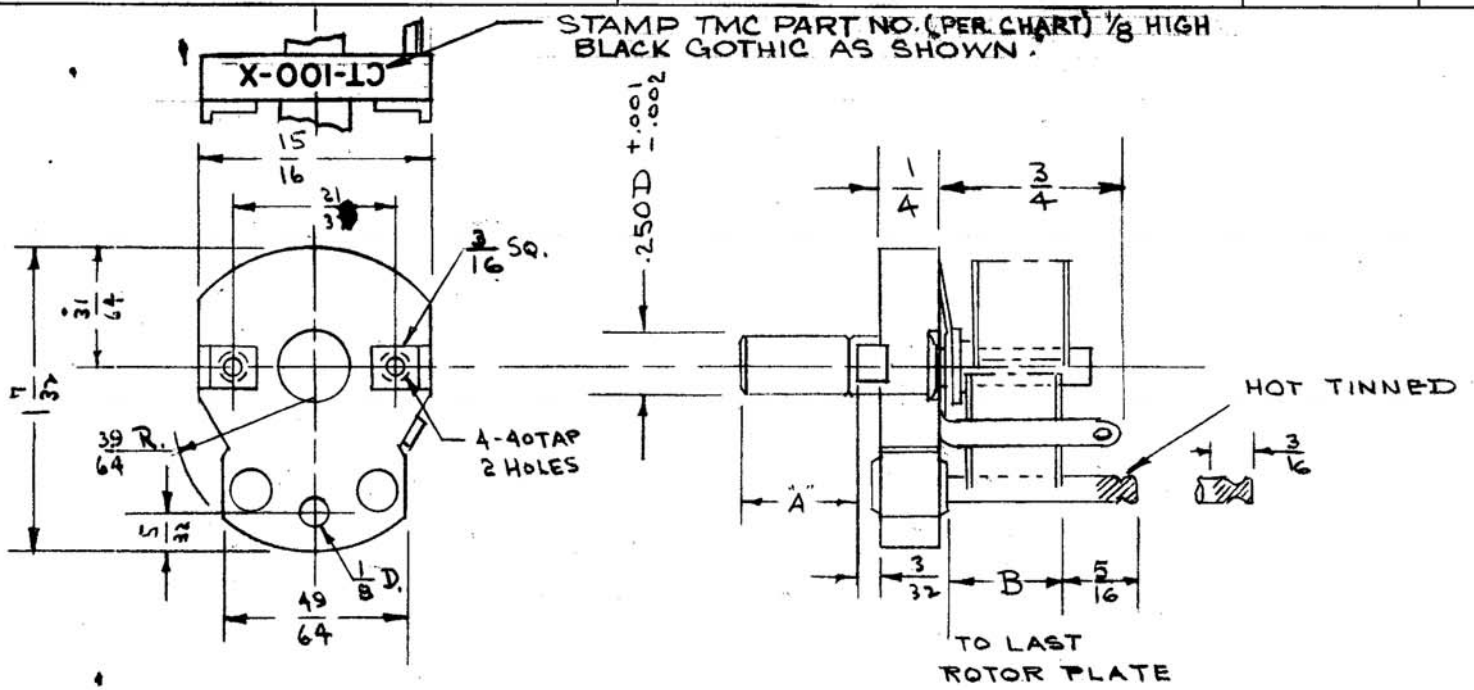

TMC No.	MFG. No	CAPACITY MIN	CAPACITY MAX	PLATES	"A" FROM MTG. POST	"B"	TEST VOLTAGE
CT-100-1	APC-50	3.9	50	14	7/8 (.875)	1/2	600 V. R.M.S.
CT-100-2	APC-100-B	5.5	100	27	7/8 (.875)	59/64	600V. RMS
CT-100-3	11726-289	6.6	135	36	7/8 (.875)	1-5/32	600 V RMS

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
F	1	ADDED PART NO. STAMP & MFR REF. CODE NO. ADDED	8-16-63	9786	AK		
E	1	CT-100-3 ADDED	9-19-62	7379	E.S.		
D	1	CAP. MAX. WAS 99; TEST VOL. ADDED	3-27-62	6,5,2	G.S.		
C	1	CT-100-2 ADDED	2-23-62	6444	E.L.		
B	2	MFG. NO. WAS APC-50	5-10-55	2	PB		
	1	"A" DIMENSION RELOCATED					
A	1	.7/8 Was 21/32	11/20/53	1	16		

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL | WEIGHT PER PC.

TYPE & TEMPER

HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

CAPACITOR, VARIABLE
AIR TRIMMER.

C.D.D.		
DRAWN	ELEC. DES. APP.	MECH. DES. APP.
10/30/52		
CHECKED	FINAL APPROVAL	

Supercedes AMS345

CT-100 F

TOLERANCES

SCALE S401-12

ALL OTHERS: DEC. DIM. ±, FRAC. DIM. ±, ANGULAR DIM. ±

DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

FORM — 108