

CU-105 A


USED ON

MODEL PROJECT NO. ASSY. NO. DATE

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

WILL HOLD
 1A/2, 1A/3, 1A/4, 12/2, 10/2, 10/3 BX
 1A/2, 1A/3, 1A/4, 12/2, 12/3, 10/2
 3/8" FLEX. CONDUIT

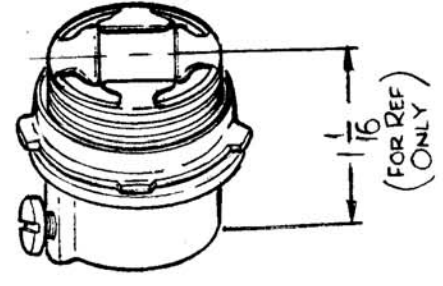

REF: THOMAS & BETTS CO. #240
 REF: GENERAL ELEC. CO. CAT. # SP-7105

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
STOCK SIZE		FITTING	
MATERIAL	WEIGHT PER PC.	ARMORED CABLE	
TYPE & TEMPER			
		C.D.S. 7/6/53	
		DRAWN	ELEC. DES. APP.
			MECH. DES. APP.
HEAT TREAT. SPEC.	CHECKED	FINAL APPROVAL	
FINISH & SPEC. NO.		CU-105	A

ISSUE ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
A 1	ADDED THOMAS & BETTS CO. #240 TO REF. CHART	5-31-62	6755	V.R.R.	[Signature]	[Signature]
TOLERANCES						
DEC. DIM: ± FRAC. DIM: ± ANGULAR DIM: ±						
DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.						