TMC P/N	MFG P/N	COLOR CODE	INNER COND. DIA. RANGE	CABLE ACCOMODATED	DIMENSIONS A	B	C
CU159-1	329331	VIOLET	.045-.065	RG174, RG188	.150	.185	.070

REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE
	VLRB-1		10-21-64

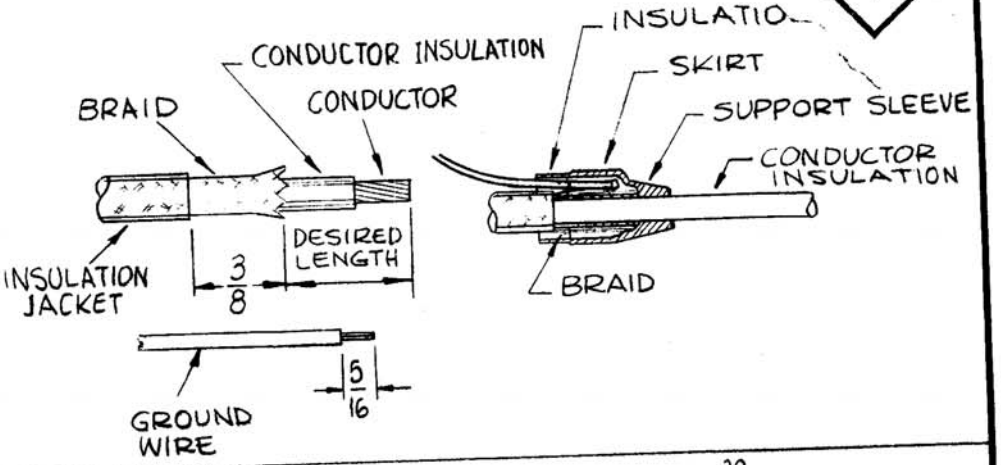

SPECIFICATIONS

	MATERIAL	HEAT TREAT	FINISH
OUTER FERRULE	COPPER	ANNEALED	TIN PLATED
INNER FERRULE	BRASS	STRESS RELIEVED	TIN PLATED

GROUND WIRE SIZE ~ 1#20, 1#22, 1 OR 2#24, 1#26 STRANDED
1#22, 1 OR 2#24 SOLID.

MFG TOOL NO. 59500
DIE NO. 69204-1



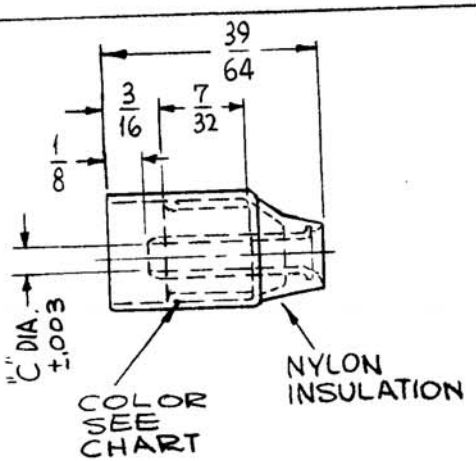

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	10.27.64	Ø	JC		
X	EXP. RELEASE	10-22-64	X	SRG		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES: DECIMALS .X ±.05, .XX ±.01, .XXX ±.005; FRACTIONS ± 1/64; ANGLES ± 0° 30'

SCALE —#—

CODE C

5401-279

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE: SEE SPECS

MATERIAL: SEE SPECS

TYPE & TEMPER | HEAT TREAT. SPEC.: SEE SPECS

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

FERRULE, INSULATED
COAX. CABLE

DRAWN	CHECKED	FINAL APPROVAL
SRG @ 10-26-64	JC 10/26/64	CU159 Ø

ELEC. DES. APP. | MECH. DES. APP.

CURRENCY NO. 140M 18323