REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE
	CHG-1		9-16-60

CV-104 A

TMC PART NO.	MFG. PT. NO.	CAPACITANCE UUF MINIMUM	CAPACITANCE UUF MAXIMUM	D.C. WORKING VOLTAGE	TEMP. COEF. AT 0.1 MC	PISTON MAT'L	A
CV104-1	VC7G	2.0	30.0	1000	-100 TO +100	INVAR	1-5/8

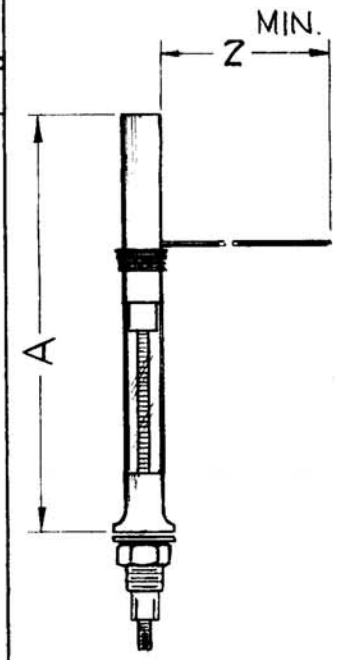

NOTE: IMPORTANT

WHEN CV104-1 IS ORDERED FOR SPARE PARTS FOR USE IN THE CHG-2 UNITS, CV115 WILL BE USED IN ITS PLACE WITH THE ADDITION OF A PM1151 WASHER (SUPPLY WITH CV115)

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	1	NOTE ADDED	1.4.65	13205	WB		

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: S401-120

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

CAPACITOR, VARIABLE, GLASS

DRAWN: J.C. Bielo | CHECKED | FINAL APPROVAL

ELEC. DES. APP. | MECH. DES. APP.

CV-104 A

FORM 108-A