


REQ. PER UNIT 1

MODEL GPT-10K  
 USED ON AT-100  
 ASS'Y. N.  
 DATE 3/23/59

FP-165 D

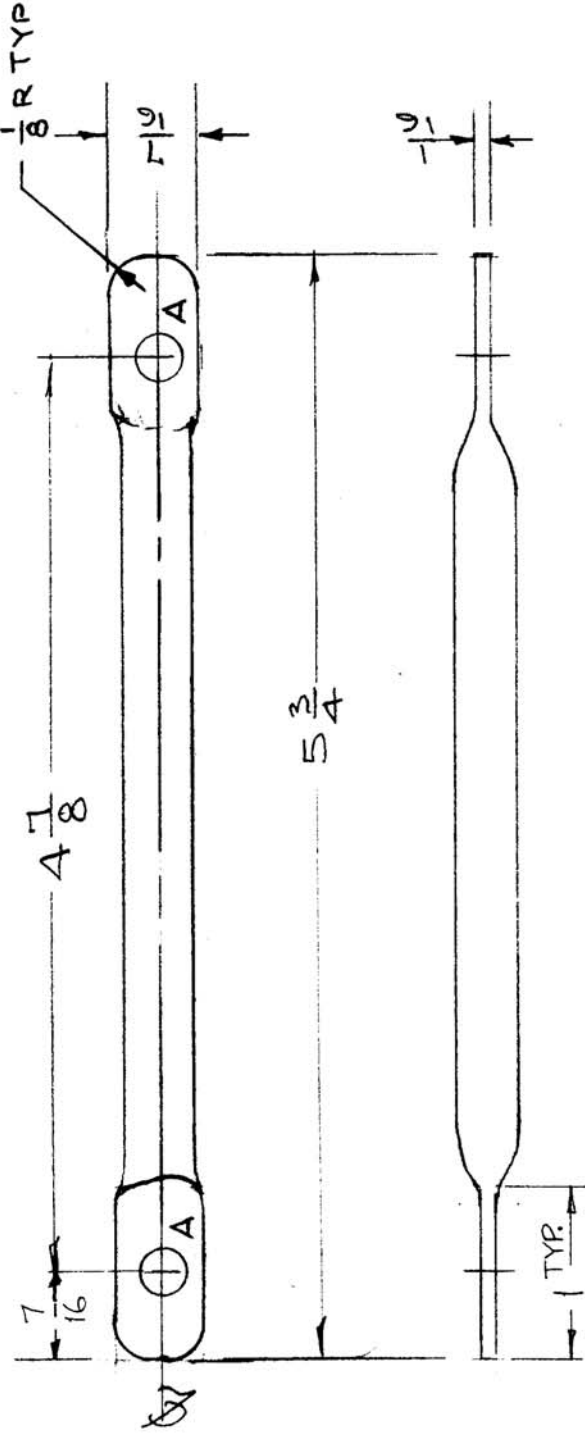

A -  $.17/64$  DIA 2 HOLES

\* PLATING & FINISHING TO BE COMPLETED BEFORE PIECE IS FABRICATED. CORNERS & EDGES TO BE SMOOTH.

REQ. ITEM	DESCRIPTION	SYMBOL
D	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
C 1	5/16 O.D. STOCK SIZE COPPER TUBING *	
B 1	SOFT TYPE & TEMPER HEATTREAT. SPEC. SILVER PLATE .0003 PER S245 CLEAR IRIDIOTE PER S423 *	
A 1	FINISH & SPEC. NO.	
ISSUE ITEM	CHANGED FROM	
DELETED #53 DR HOLES ADDED PLATING & FINISHING RELATION NOTES		
#53 DR. HOLES ADD. (2 PL.)		
DATE CH. NO. DRAFTS CHECKER ENG. APP. 2/2/66 15711 JL 2-18-65 13535 R.S. 1-3-61 4269 RU 10/9/60 3137 DM		
SCALE: MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		
DEC. DIM. ±	FRAC. DIM. ±	ANGULAR DIM. ±
2/16	1/32	±
7/16	1/64	±
3/8	1/32	±
1/2	1/64	±
5/8	1/32	±
3/4	1/64	±
7/8	1/32	±
1	1/64	±
1 1/8	1/32	±
1 1/4	1/64	±
1 3/8	1/32	±
1 1/2	1/64	±
1 3/4	1/32	±
2	1/64	±
2 1/4	1/32	±
2 1/2	1/64	±
2 3/4	1/32	±
3	1/64	±
3 1/4	1/32	±
3 1/2	1/64	±
3 3/4	1/32	±
4	1/64	±
4 1/4	1/32	±
4 1/2	1/64	±
4 3/4	1/32	±
5	1/64	±
5 1/4	1/32	±
5 1/2	1/64	±
5 3/4	1/32	±
6	1/64	±
6 1/4	1/32	±
6 1/2	1/64	±
6 3/4	1/32	±
7	1/64	±
7 1/4	1/32	±
7 1/2	1/64	±
7 3/4	1/32	±
8	1/64	±
8 1/4	1/32	±
8 1/2	1/64	±
8 3/4	1/32	±
9	1/64	±
9 1/4	1/32	±
9 1/2	1/64	±
9 3/4	1/32	±
10	1/64	±
10 1/4	1/32	±
10 1/2	1/64	±
10 3/4	1/32	±
11	1/64	±
11 1/4	1/32	±
11 1/2	1/64	±
11 3/4	1/32	±
12	1/64	±
12 1/4	1/32	±
12 1/2	1/64	±
12 3/4	1/32	±
13	1/64	±
13 1/4	1/32	±
13 1/2	1/64	±
13 3/4	1/32	±
14	1/64	±
14 1/4	1/32	±
14 1/2	1/64	±
14 3/4	1/32	±
15	1/64	±
15 1/4	1/32	±
15 1/2	1/64	±
15 3/4	1/32	±
16	1/64	±
16 1/4	1/32	±
16 1/2	1/64	±
16 3/4	1/32	±
17	1/64	±
17 1/4	1/32	±
17 1/2	1/64	±
17 3/4	1/32	±
18	1/64	±
18 1/4	1/32	±
18 1/2	1/64	±
18 3/4	1/32	±
19	1/64	±
19 1/4	1/32	±
19 1/2	1/64	±
19 3/4	1/32	±
20	1/64	±