

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
0		REL. TO PROD.	DEC 13/67		AP	W	



REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

FX10017 ϕ

STANDARD DRAWING

TMC
FX10017 - ϕ

TMC PART NO. C/W
LATEST REV. LETTER.

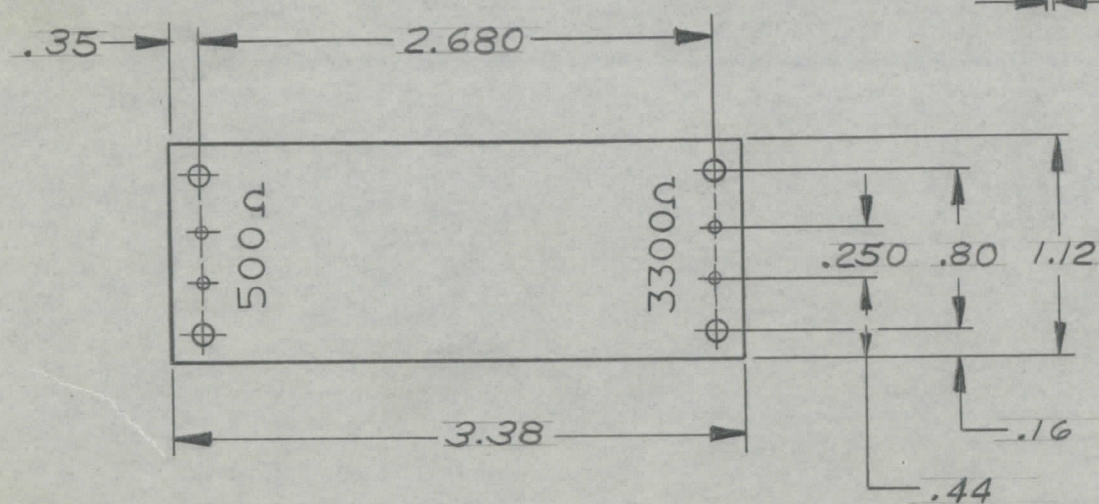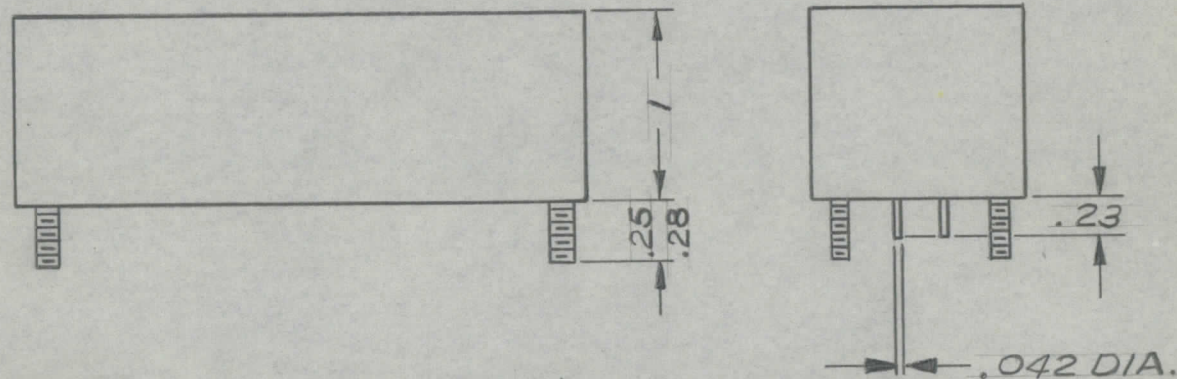

TERMINALS: 104 SWFP
STUDS: 4-40 NC-2B ST. STL.

TYPE	8 POLE
CARRIER FREQUENCY	1750 KHZ
NOMINAL BAND WIDTH	6 KHZ
PASSBAND VARIATION	± 1 dB
RESPONSE AT 3dB	± 3000 Hz
RESPONSE AT 40dB	± 4500 Hz
RESPONSE AT 60dB	± 5800 Hz
INPUT IMPEDANCE	3300 Ω / 20 pf
OUTPUT IMPEDANCE	500 Ω / 20 pf
OPERATING TEMPERATURE RANGE	0° TO 60° C

FINISH NOTES:-

- POWDER BLASTED BRIGHT NICKEL PER MIL-F-14072 (M 212)

MANUFACTURER NO. S10045-50
MANUFACTURERS PART NO. 0405-000

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		FILTER CRYSTAL	
WEIGHT PER PC.		SYMMETRICAL (AM)	
TYPE & TEMPER		AP	A. Soder
HEAT TREAT. SPEC.		DRAWN	ELEC. DES. APP. MECH. DES. APP.
CHECKED		FINAL APPROVAL	
SEE NOTES		FX10017 ϕ	
FINISH & SPEC. NO.			

TOLERANCES		SCALE:
ALL OTHERS	DEC. DIM. \pm FRAC. DIM. \pm ANGULAR DIM. \pm	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

MODEL	PROJECT NO.	ASS'Y. NO.	DATE
			DEC 30/67

USED ON