


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

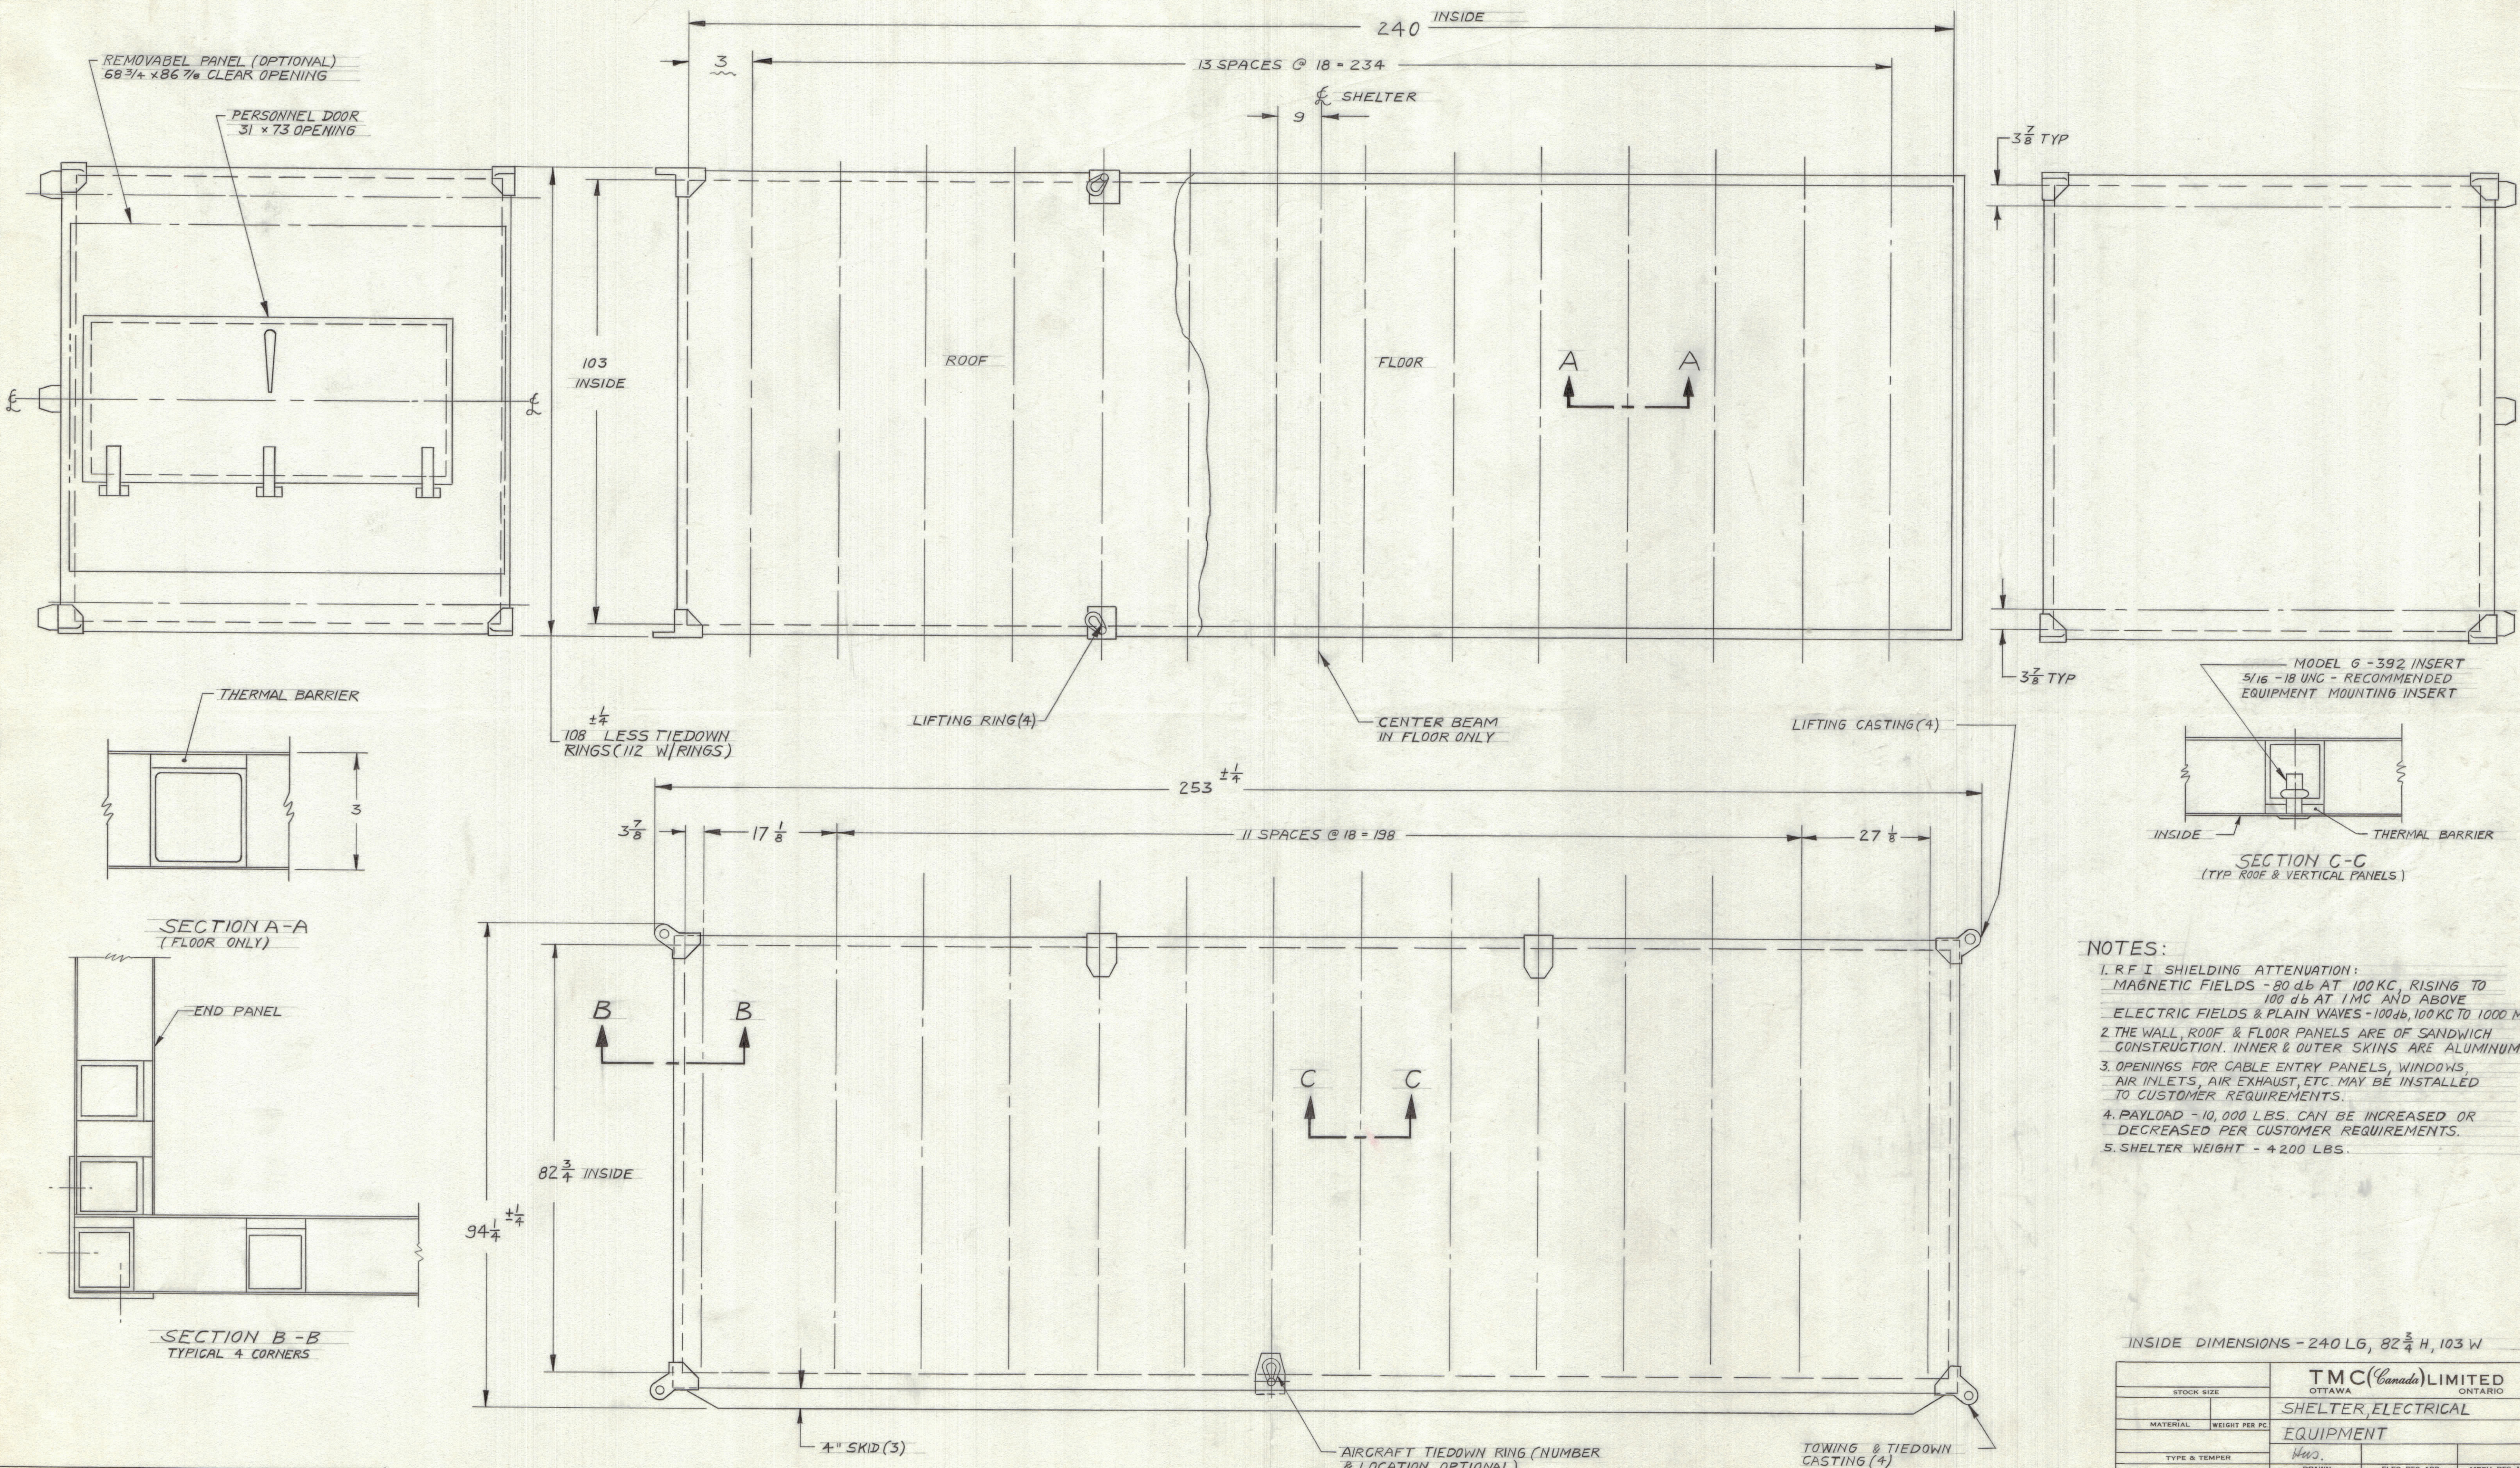

- NOTES:
1. R.F.I. SHIELDING ATTENUATION:
MAGNETIC FIELDS - 80 db AT 100 KC, RISING TO 100 db AT 1 MC AND ABOVE
ELECTRIC FIELDS & PLAIN WAVES - 100 db, 100 KC TO 1000 MC
 2. THE WALL, ROOF & FLOOR PANELS ARE OF SANDWICH CONSTRUCTION. INNER & OUTER SKINS ARE ALUMINUM
 3. OPENINGS FOR CABLE ENTRY PANELS, WINDOWS, AIR INLETS, AIR EXHAUST, ETC. MAY BE INSTALLED TO CUSTOMER REQUIREMENTS.
 4. PAYLOAD - 10,000 LBS. CAN BE INCREASED OR DECREASED PER CUSTOMER REQUIREMENTS.
 5. SHELTER WEIGHT - 4,200 LBS.

INSIDE DIMENSIONS - 240 LG, 82 3/4 H, 103 W

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		SHELTER, ELECTRICAL EQUIPMENT	
WEIGHT PER PC			
TYPE & TEMPER			
HEAT TREAT. SPEC.			
FINISH & SPEC. NO.			

MODEL	PROJECT NO.	ASSY. NO.	DATE
			15-4-1965

TOLERANCES		SCALE:
ALL	DEC. DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK
OTHERS	FRAC. DIM. ±	SIZES AND MANUFACTURERS
	ANGULAR DIM. ±	TOLERANCES ARE NOT INCLUDED