



REVISIONS							
SYM	ZONE	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD

TECHNICAL DATA


POWER INPUT: 100 WATTS
 VOLTAGE: 115/230 VAC
 PHASE: 1 ϕ
 FREQUENCY: 50/60 CPS
 HEAT DISSIPATION: 100 WATTS 340 BTU's/HR
 AMBIENT TEMP RANGE: 0 TO 50°C
 RELATIVE HUMIDITY: 0 TO 90 %
 WEIGHT: 75 lbs.

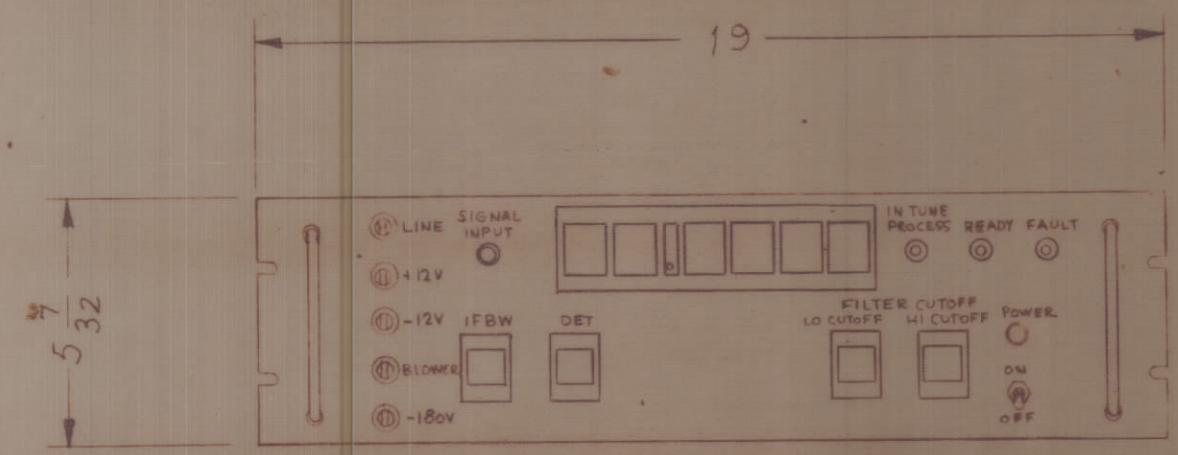


FRONT VIEW

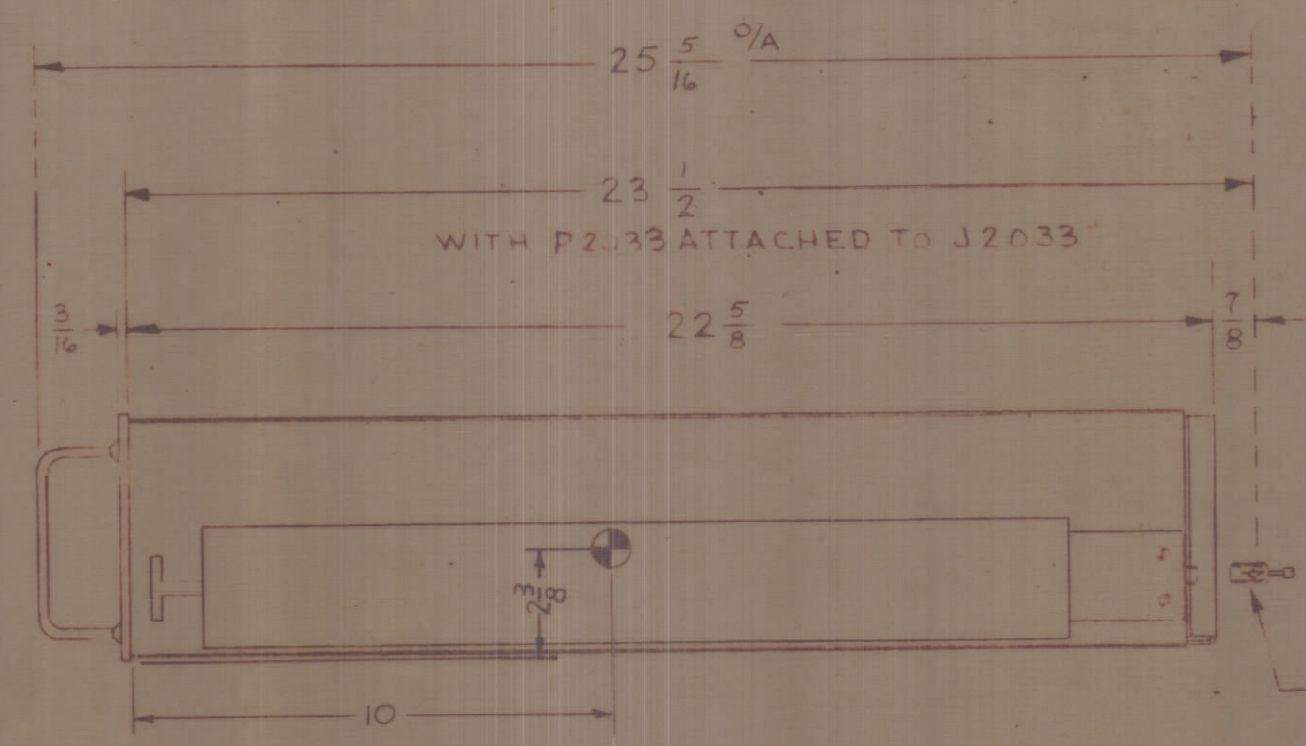

RIGHT SIDE VIEW

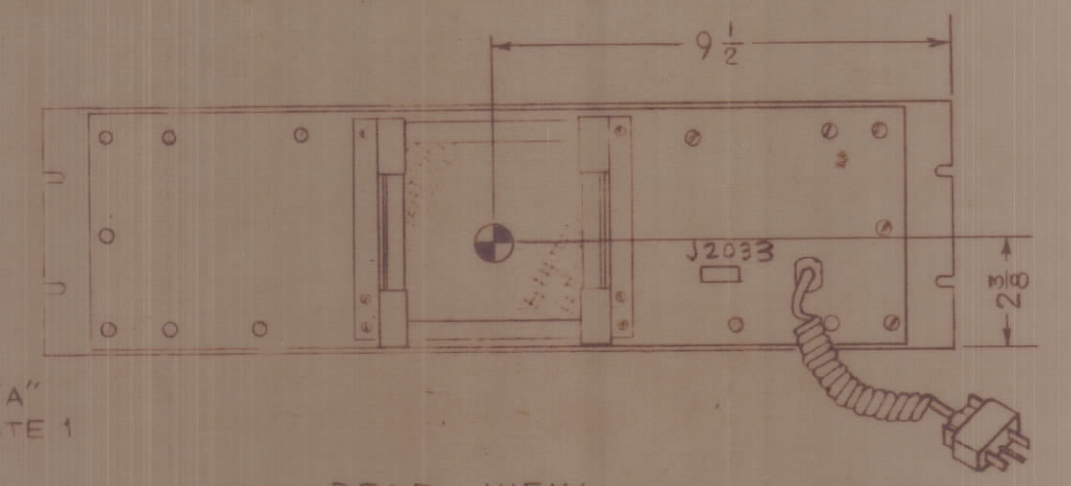

REAR VIEW

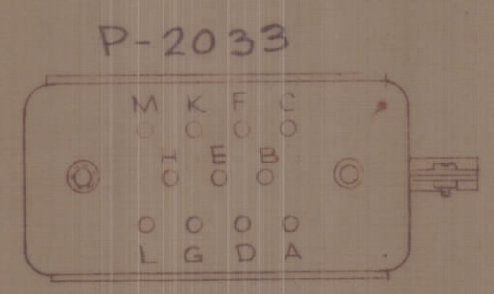

DETAIL "A"
SEE NOTE 1

NOTE:

- SIGNAL REQUIREMENTS -12V DC. REFER TO SHEET 4 TB-101 FOR DETAILS. ONLY ACTIVE CONTACTS ARE A AND C.
- SEE SHEET 6 OF 6 FOR INSTALLATION MATERIAL LIST.

⊙ - CENTER OF GRAVITY

CONTRACT No. N600(63133-II-126)63002	EXAMINED		NAVAL SHORE ELECTRONICS ENGINEERING CENTER WASHINGTON, D C			
TECHNICAL MATERIEL CORP	OFFICIAL	SIGNATURE	CONTROL MONITOR GROUP INDICATOR FREQUENCY, ID-1367/URR			
DWG No. ID-325-3	BR HEAD					
APPROVED <i>[Signature]</i> DATE <i>3/2/66</i>	PROJ ENG					
SATISFACTORY TO:	DIV DIR					
DATE:	PROJ DIR					
	DRAFT SEC					
	DRAWN		RW	CODE IDENT	SIZE	562
	FEDERAL SUPPLY CODE 82679		23	82679	C	
	CONTR DRAWING NO. ID-325-3	SCALE NONE				SHEET 3 OF 6