


REQ. PER UNIT	USED ON			LD1776	Ø
	MODEL	ASS'Y. NO.	DATE		
1	KIT-161		1-27-65		

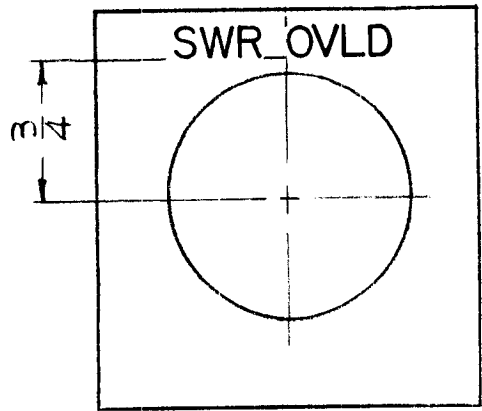

HEIGHT OF LETTERS	DEPTH OF STROKE	WIDTH OF STROKE
3/16	.010	.025

UNLESS OTHERWISE SPECIFIED  
 1~ LETTERING 3/16 HIGH GOTHIC.  
 2~ LETTER GROUPS TO BE CENTERED ON HOLES.  
 3~ ENGRAVING TO BE WHITE FILLED.

MARK TMC PART NO. (LD1776/MS4334) 1/8 HIGH GOTHIC W/LATEST REV. LETTER. ON REAR.

REF. MS 4334

							REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
									THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK		
Ø	ORIGINAL RELEASE FOR PRODUCTION	3-1-65	Ø	SRG	28				MARKING, PLATE, FRONT		
X	EXP. RELEASE	1-27-65	X	SRG					MARKING PROCESS: ENGRAVING		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1					SRG	SRG	SRG
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A			TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
TOLERANCES											LD1776
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	LD1776