


| | | | | | |
|---------------|---------|------------|---------|--------|---|
| REQ. PER UNIT | USED ON | | | LD1973 | ∅ |
| | MODEL | ASS'Y. NO. | DATE | | |
| 1 | TST-10K | | 7-22-65 | | |

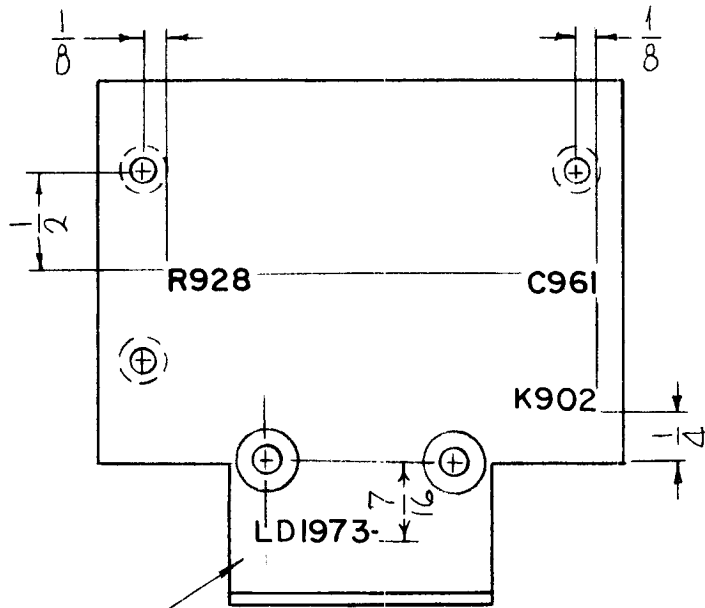

MARK TMC P/N
1/8 HIGH GOTHIC
W/LATEST REV.
LETTER.

MARKING PROCESS: AS PER TMC SPECIFICATION S-727.

LETTERING: 1/8 HIGH BLACK GOTHIC, LOCATED AS SHOWN.

REF: MS 4687.

| REQ. | ITEM | PART NO. | F. BUDETTI DESCRIPTION | | | | SYMBOL |
|---|-------------------------------------|---|--|--------------------|-------------------|-----------------|-----------------|
| | | | THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK | | | | |
| ∅ | ORIGINAL RELEASE | 2/14/66 | ∅ | | | | |
| XI | MS4687 DELETED FROM TMC PART NO. | 2/9/66 | AA | Jc | | | |
| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES | | SCALE 1:1 | | | | | |
| DECIMALS .X ± .05 .XX ± .01 .XXX ± .005 | TOLERANCES | FRACTIONS ± 1/64 ANGLES ± 0° 30' | CODE A | | | | |
| | | | | TYPE & TEMPER | HEAT TREAT. SPEC. | DRAWN | CHECKED |
| | | | | | | spz | JCB |
| | | | | | | FINAL APPROVAL | |
| | | | | | | aa | LD1973 ∅ |
| | | | | FINISH & SPEC. NO. | | ELEC. DES. APP. | MECH. DES. APP. |