REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	LD2063	Ø
1	PSP-350B	A4445	3-15-66		

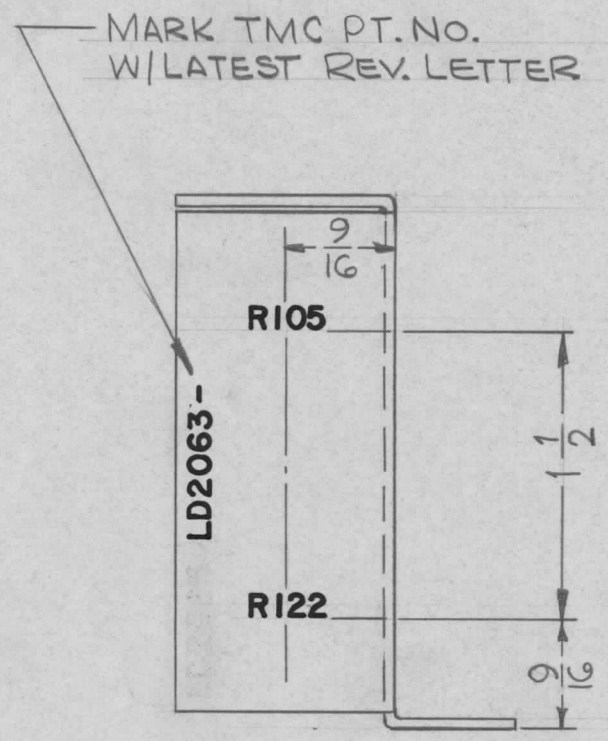

MARKING PROCESS: AS PER TMC SPECIFICATION S-727.

LETTERING: 1/8 HIGH BLACK GOTHIC, LOCATED AS SHOWN.

REF: MS4895-1

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	3-15-66	Ø	WW		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES
DECIMALS .X ±.05 .XX ± .01 .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30′

CODE

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

MARKING-BRACKET MTG., RESISTOR

DRAWN	CHECKED	FINAL APPROVAL
H. AUSTIN	JCB	MMKay
3-15-66 G. Durable		LD2063 Ø

ELEC. DES. APP. | MECH. DES. APP.

ML 19 3/4/66

TMC FORM 198-A

REPROVEL NO. 440H