



SPECIFICATIONS

COLOR: WHITE
 TRANSMITTANCE: TRANSLUCENT
 NON-ROTATING: YES
 RETENTION: SNAP-IN
 MAXIMUM TEMPERATURE: 130°F (54.5°C)
 ENGRAVING: HORIZ. (AS SHOWN), AS PER TMC SPEC. S566.
 1/8 HIGH GOTHIC BLACK FILL FOR ONE OR TWO LINES.
 3/32 HIGH GOTHIC BLACK FILL FOR THREE LINES.
 USED FOR SPARE PARTS OF PUSH BUTTON ROW SWITCHES.

REQ. PER UNIT	USED ON			LI 113	A
	MODEL	ASS'Y. NO.	DATE		
	RTP (*)				

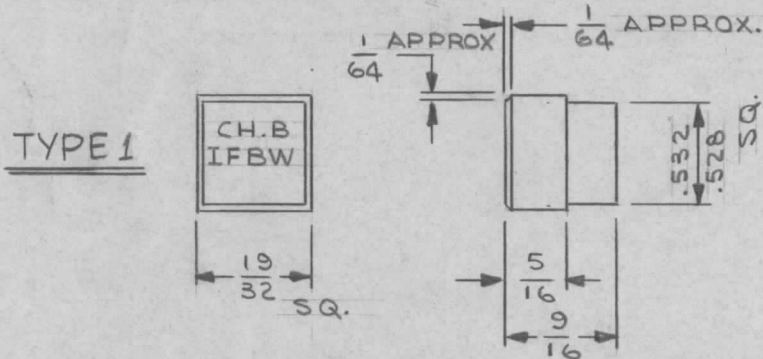

MUST HAVE BLACK ENGRAVED LINE BET. 1ST & 2ND ENGRAVED LINES

NOTE - ALL DIMENSIONS SAME AS TYPE I

TYPE 2

TYPE 3 SAME AS TYPE 1 WITH NO ENGRAVING

TMC PART NUMBER SHALL BE IN THE FOLLOWING FORM:

LI 113 - X - CH. B / IFBW
 BASIC P/N TYPE ENGRAVING
 (SLASH INDICATES THE BEGINNING OF ANOTHER LINE AS SHOWN)

ENGRAVING REF: MIL-STD-12 (AS APPLICABLE)

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
	STOCK SIZE		
	ACRYLIC PLASTIC	LENS, INDICATOR LIGHT, ENGRAVED	
	MATERIAL		
		JADe	JADe 12/1/65
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN
			CHECKED
			FINAL APPROVAL
			LI 113
			A
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	
		1/1	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE C
		S401-378	