


REQ. PER UNIT	USED ON			MS-1065	A
	MODEL	ASS'Y. NO.	DATE		
1	A-1421		7-26-57		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	TOLERANCES	FRACTIONS
.X ± .05		± 1/64
.XX ± .01		ANGLES
.XXX ± .005		± 0° 30'

CUT HERE
GUARANTEED
2-566

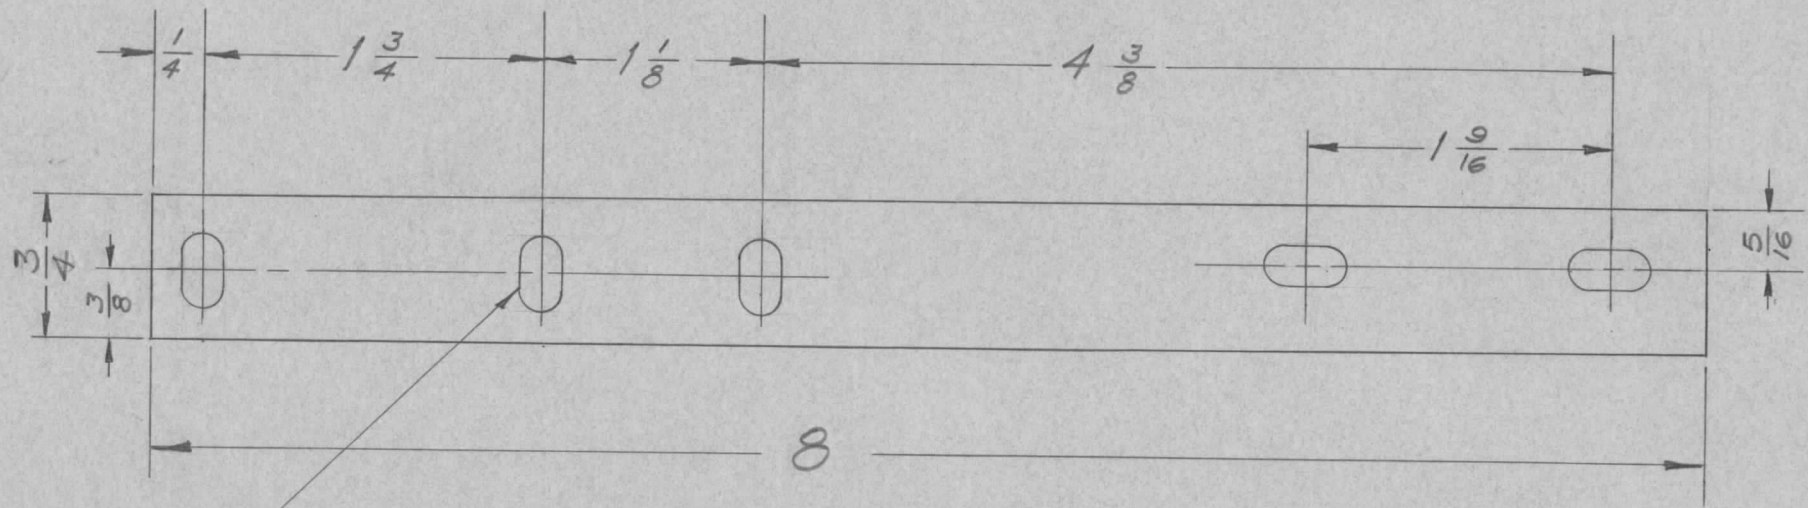

13/64 X 13/32 5 REQ.

NOTE -
S404 IRIDITE DIP.
S107 LACQUER DIP.

								REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
								.081		THE TECHNICAL MATERIEL CORP.		
								STOCK SIZE		MAMARONECK, NEW YORK		
A	1	S404-IRIDITE WAS S101-CAUSTIC DIP	12-8 59	1001	P		EMN	ALUMINUM		BOTTOM EXTENSION,		
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL		BRACKET, POWER STRIP		
TOLERANCES			SCALE:				5052-H32		SC.			
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE				TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
FRAC. DIM. ±			BEEN DETERMINED AND ANY DEVIATIONS				SEE NOTE					
ANGULAR DIM. ±			WILL BE CAUSE FOR REJECTION.									
			REMOVE ALL BURRS AND SHARP EDGES				FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	MS-1065	A