


REQ. PER UNIT	USED ON			MS-10554	A
	MODEL	ASS'Y. NO.	DATE		
1	AMCG-2 & -3		9-23-63		

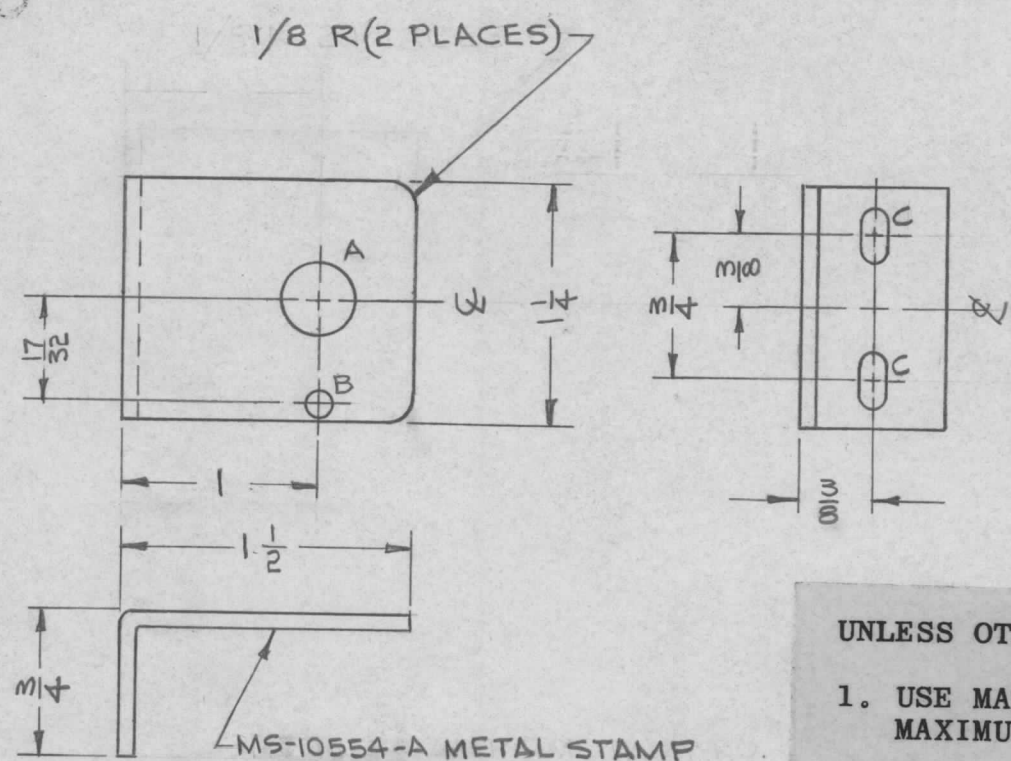

HOLE	DESCRIPTION	REQ'D
A	.375 DIA	1
B	9/64 DIA	1
C	9/64 x 9/32 SLOT	2

MS-10554-A METAL STAMP
TMC PART NO. 1/8 HIGH
GOTHIC, ON INSIDE
AS SHOWN.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.

REF: LD-10168-A

REQ. ITEM	PART NO.	CANADA DESCRIPTION		SYMBOL
	.081 THK	THE TECHNICAL MATERIEL CORP.		
	STOCK SIZE	MAMARONECK. NEW YORK		
A	REDRAWN, MARKING NOTES ADDED	BRACKET, SUPPORT,		
SYM	DESCRIPTION	BIAS POTENTIOMETER		
	DATE	CH. NO.	DRAFTS	CHECKER
	10/31/63	10327	9/29	JDO
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		
		1/1		
DECIMALS	FRACTIONS	CODE		
.X ± .05	± 1/64			
.XX ± .01	ANGLES			
.XXX ± .005	± 0° 30'			
TOLERANCES			5052H32	
			TYPE & TEMPER	HEAT TREAT. SPEC.
			S-404 YEL IRIDITE	
			FINISH & SPEC. NO.	ELEC. DES. APP.
				MECH. DES. APP.
			DRAWN	CHECKED
			JDO	JDO 9/23/63
			FINAL APPROVAL	
			BP	
			MS-10554	
			A	