



ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
Ø		RELEASED FOR PROD.	17/1/66		RL		(Signature)					

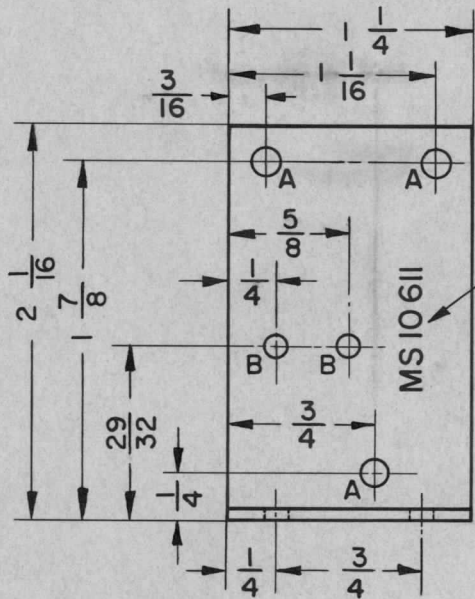

METAL STAMP, REVERSE SIDE, TMC PART NO. 1/8 HIGH GOTHIC, WITH LATEST REVISION LETTER

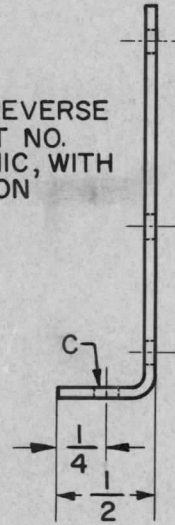

HOLE	DESCRIPTION	REQ'D
A HOLE	.189-194 DIA. (#10 DR.)	3
B HOLE	1/8 DIA	2
C HOLE	5/32 DIA	2

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

AMC20	020 / 65	A 10 382	5-10-65	.064 THK		TMC (Canada) LIMITED OTTAWA ONTARIO		
MODEL	PROJECT NO.	ASS'Y. NO.	DATE	STOCK SIZE				
USED ON				ALUM.	DRIVER BRACKET			
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				MATERIAL		WEIGHT PER PC.		
				IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.				
TOLERANCES				57SH32		TYPE & TEMPER		
SCALE 1:1				HEAT TREAT. SPEC.		DRAWN		
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED				S 404		ELEC. DES. APP.		
DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.				YELLOW IRIDITE		MECH. DES. APP.		
ALL OTHERS				FINISH & SPEC. NO.		CHECKED		
DEC. DIM. ±				BEDFORD		FINAL APPROVAL		
FRAC. DIM. ± 1/64				MS 10 611		Ø		
ANGULAR DIM. ± 0°30'								