
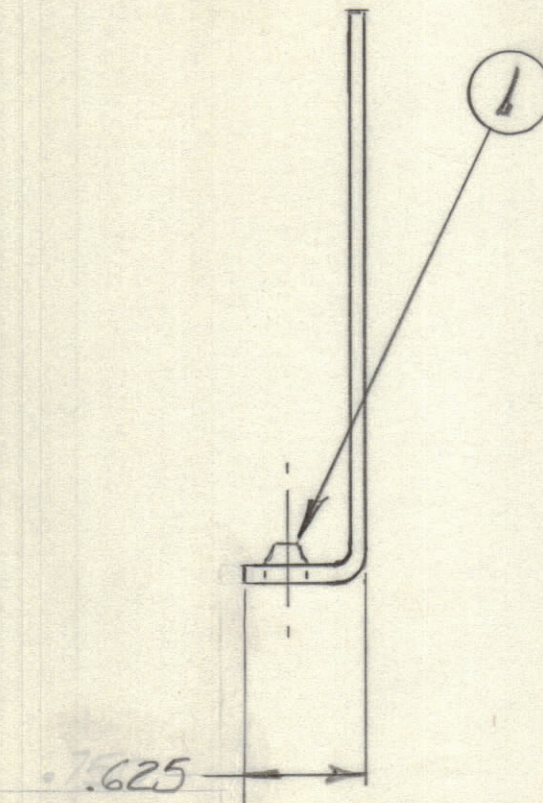


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD.	8 AUG 69		JW		
A		REVISED PER CEMIN	OCT 14 1969	591	PR		
B		REVISED PER CEMIN	5 NOV 69	613	PR		

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
2	1	NT10002-2	FASTNER MINIATURE LOCKING	D

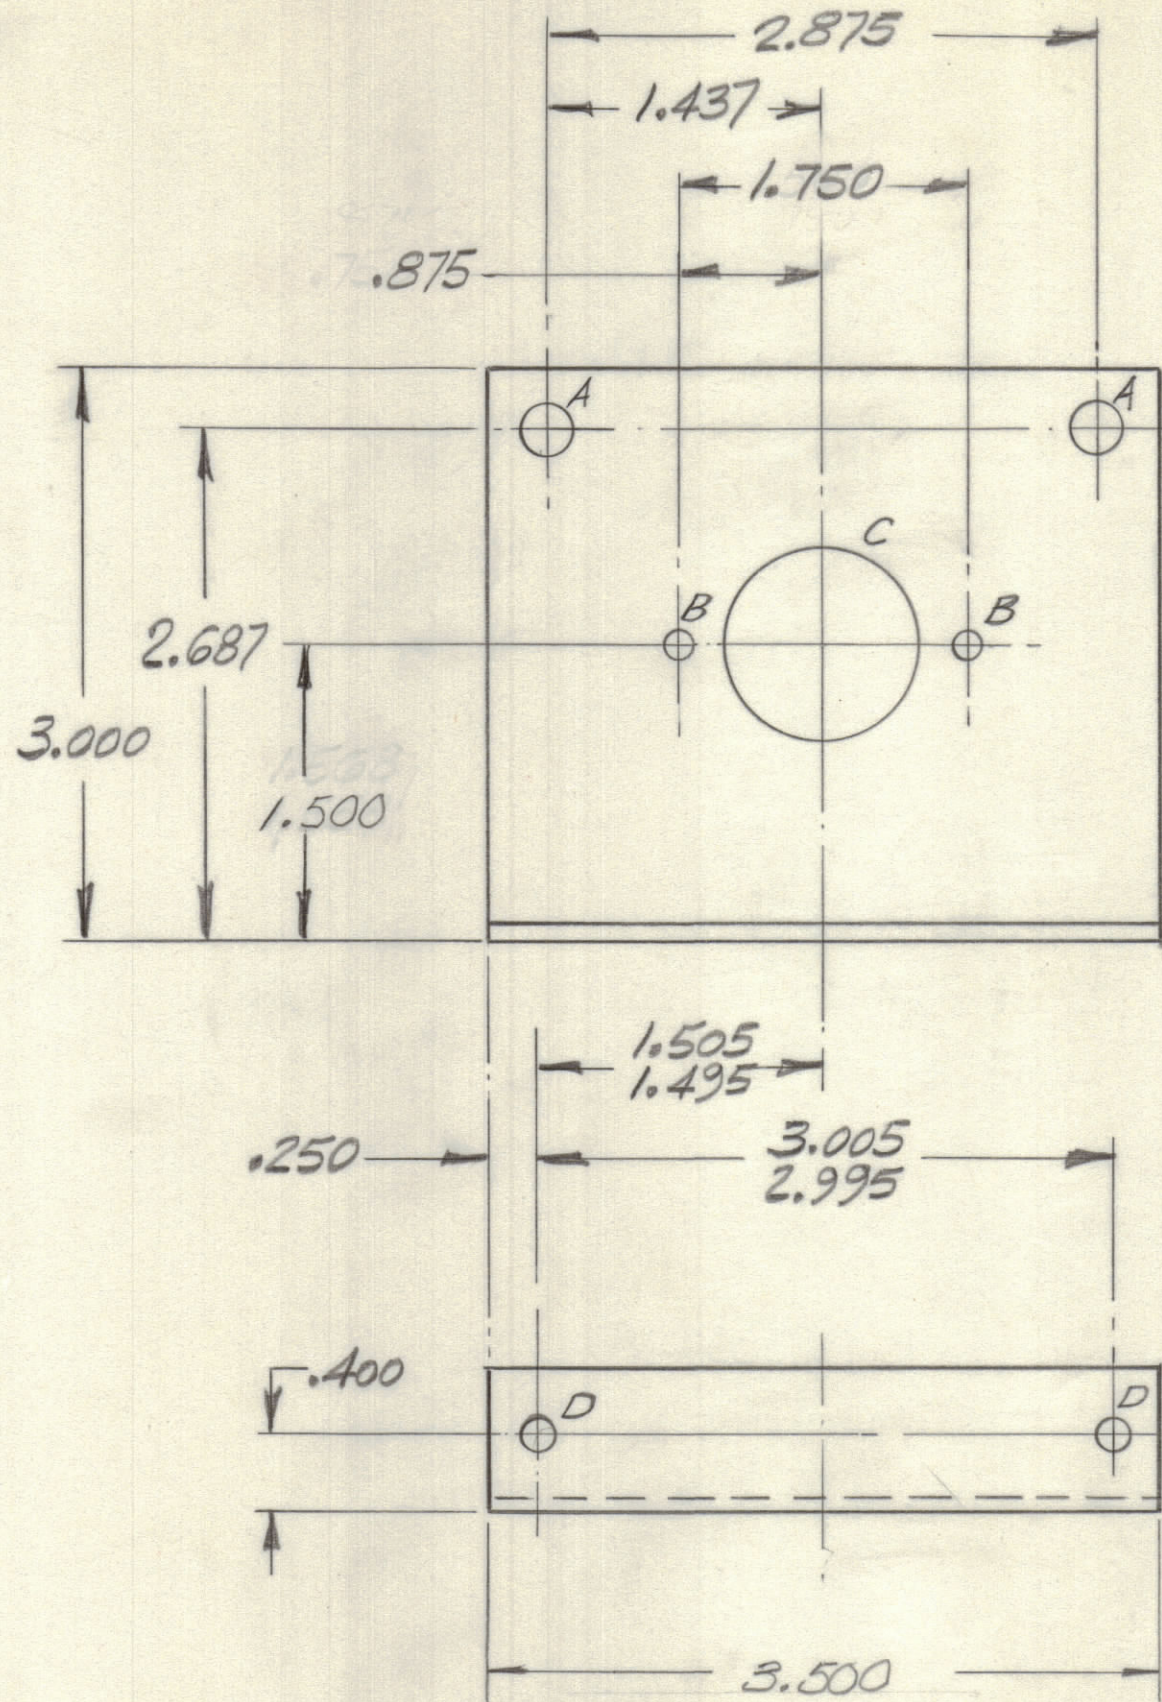

MS11060 B

HOLE	DESCRIPTION	QTY
A	.265 DIA	2
B	.140 DIA	2
C	1.000 DIA	1
D	.213/.216	2

NOTE: ITEM 1 TO BE INSERTED AFTER IRIDITING.

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC. DIM. ± .015 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

LPA-1	088/69	8 AUG 69
MODEL	PROJECT NO.	DATE

.093	TMC (Canada) LIMITED	
STOCK SIZE	OTTAWA	ONTARIO
AL. ALY	TORROID BRKT	
MATERIAL	WEIGHT PER PC.	
57S-H32		
TYPE & TEMPER	DRAWN	ELEC. DES. APP.
		MECH. DES. APP.
HEAT TREAT. SPEC.	CHECKED	FINAL APPROVAL
IRIDITE S404		MS11060 B
FINISH & SPEC. NO.		