


REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	SBE-1		7-26-57
1	SBE-2		5-5-58
1	SBE-3 AX-205	A-1460	12-2-59

MS-1117 B

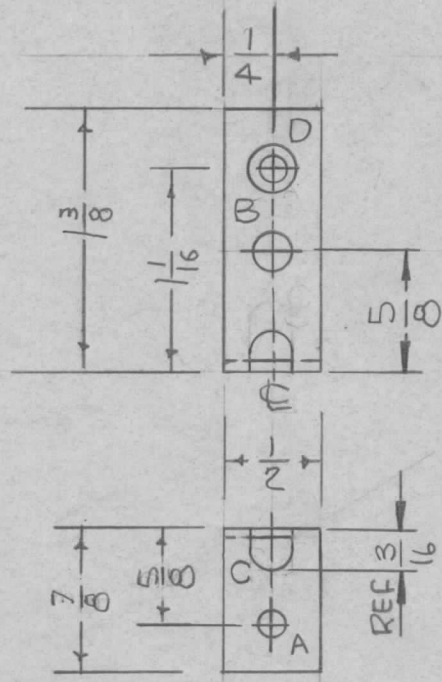

A = 1/64 ~ 1 REQ
 B = 3/16 DIA ~ 1 REQ
 C = 7/32 X 3/8 SLOT ~ 1 REQ
 D = .120 DIA C'SK 82° TO .230 DIA ~ 1 REQ

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL								
		.064	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK									
B	ADDED "B," "C," & "D" HOLES. DELETED "A" HOLE 7/8 X 5/8 WAS 3/4 X 9/16	11.1.66 17114	BRACKET, RELAY									
A	S404 - IRIDITE WAS S101 - CAUSTIC DIP	12-B 1001	SBE-1									
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.					
TOLERANCES			SCALE:									
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.									
FRAC. DIM. ±			REMOVE ALL BURRS AND SHARP EDGES									
ANGULAR DIM. ±			5052-H32		-11-		DRAWN		CHECKED		FINAL APPROVAL	
			S404-IRIDITE				ELEC. DES. APP.		MECH. DES. APP.		MS-1117 B	
			FINISH & SPEC. NO.									