


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.				DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED			
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD	5 JAN 70		PW		
A		REV PER CEMN	11 DEC 70	884	PW		
B		REV PER CEMN	JULY 7/71	1032	UAT		
C		REV PER CEMN	JULY 14/71	1091	UAT		
D		REV PER CEMN	5 OCT 71	1066	DR		

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

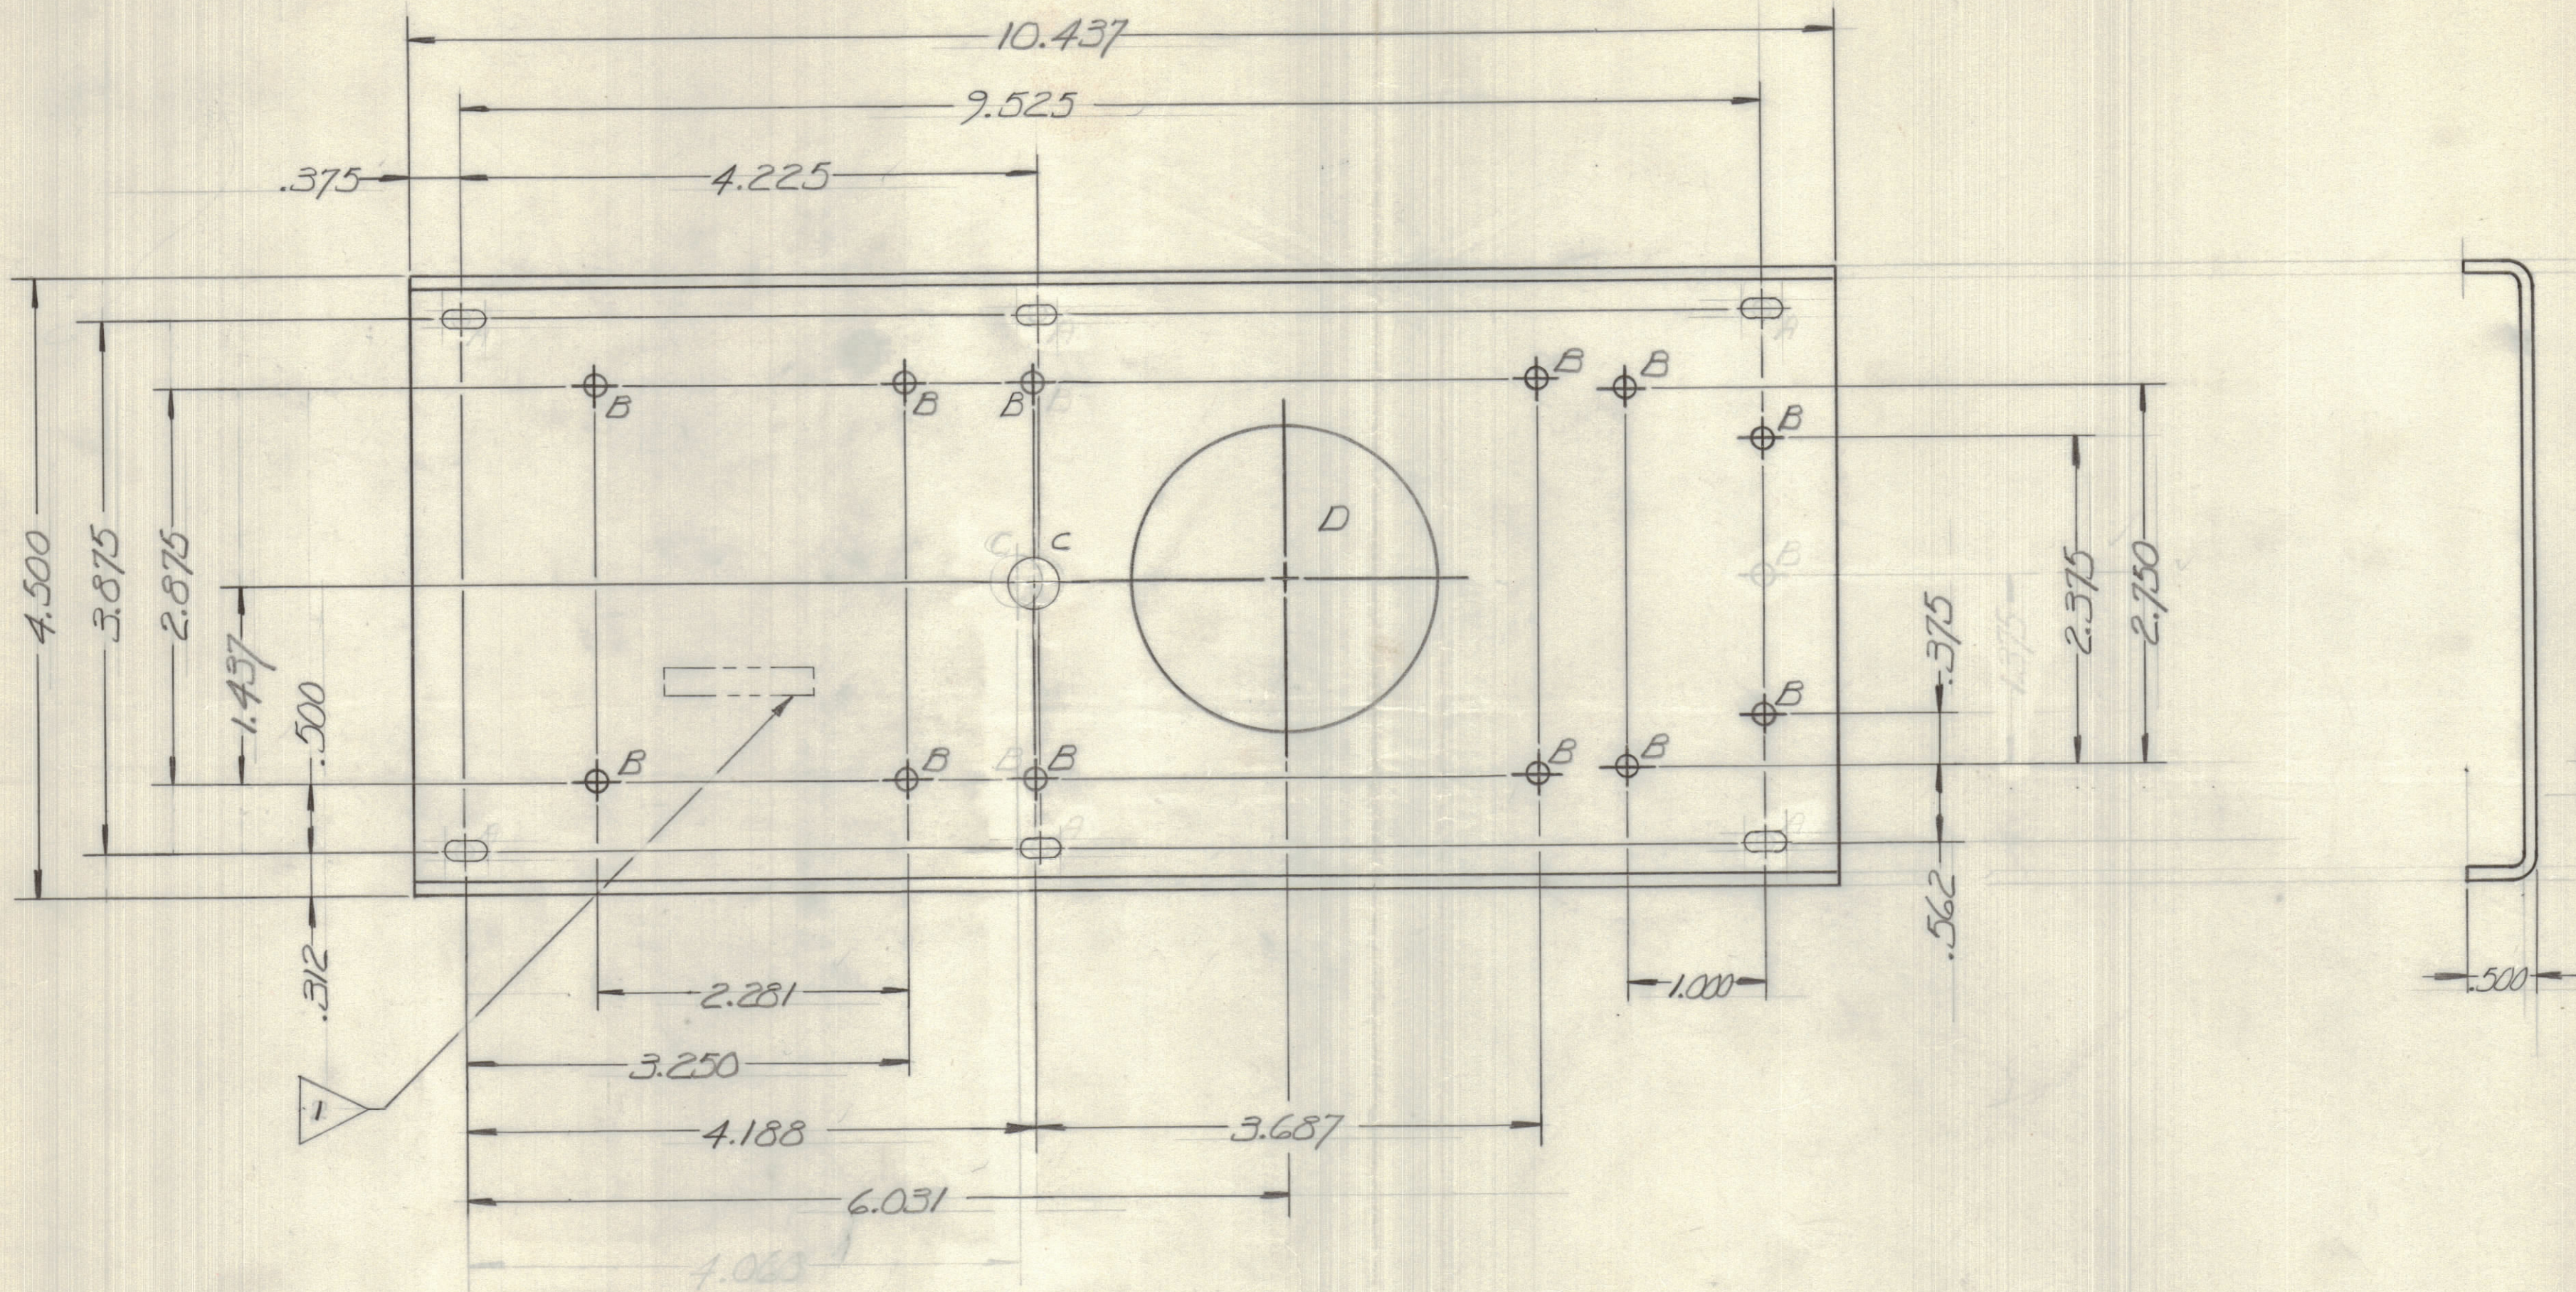

MS11129 D

2. MINIMUM INSIDE BEND RADIUS, .093

1. METAL STAMP TMC PART NO, 1/8 HIGH, GOTHIC IN APPROX. POSITION SHOWN ON OPPOSITE SIDE

HOLE	DESCRIPTION	QTY
A	Ø BROUND .312 x .156	6
B	.171 DIA	12
C	.500 DIA	1
D	2.250 DIA	1

REF LDI0378

TOLERANCES		SCALE: 1/1
ALL OTHERS	DEC. DIM. ± .015 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

LPA	088-69	5 JAN 70
MODEL	PROJECT NO.	DATE

.093 THK		TMC (Canada) LIMITED	
STOCK SIZE		OTTAWA ONTARIO	
ALALY		CHASSIS -	
MATERIAL	WEIGHT PER PC.	BAND SWITCH	
575 H32		PULLIAMS	
TYPE & TEMPER		DRAWN	MECH. DES. APP.
		CHECKED	FINAL APPROVAL
HEAT TREAT. SPEC.		MS11129 D	
IRIDITE SA04		FINISH & SPEC. NO.	