


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.				DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED			
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
X		ENG REL	19 OCT 71		BTZ	LB	
A		ALL DIM'S WERE DEC. 2 13/16 WAS 3.000 & 2 7/16 WAS 2.626	9-22-81	219	GDL		
B		1/2 DIA HOLE ADD. 2 11/32 WAS 1 11/16	11-13-81	22082	GDL		
C		NOTE: NO LONGER REQ'D ADD	1-8-85	22096	GDL		

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
4	1	TE164-6	NUT PLAIN CLINCH	
8	2	NT129-440-4	NUT ROUND SWAGE	

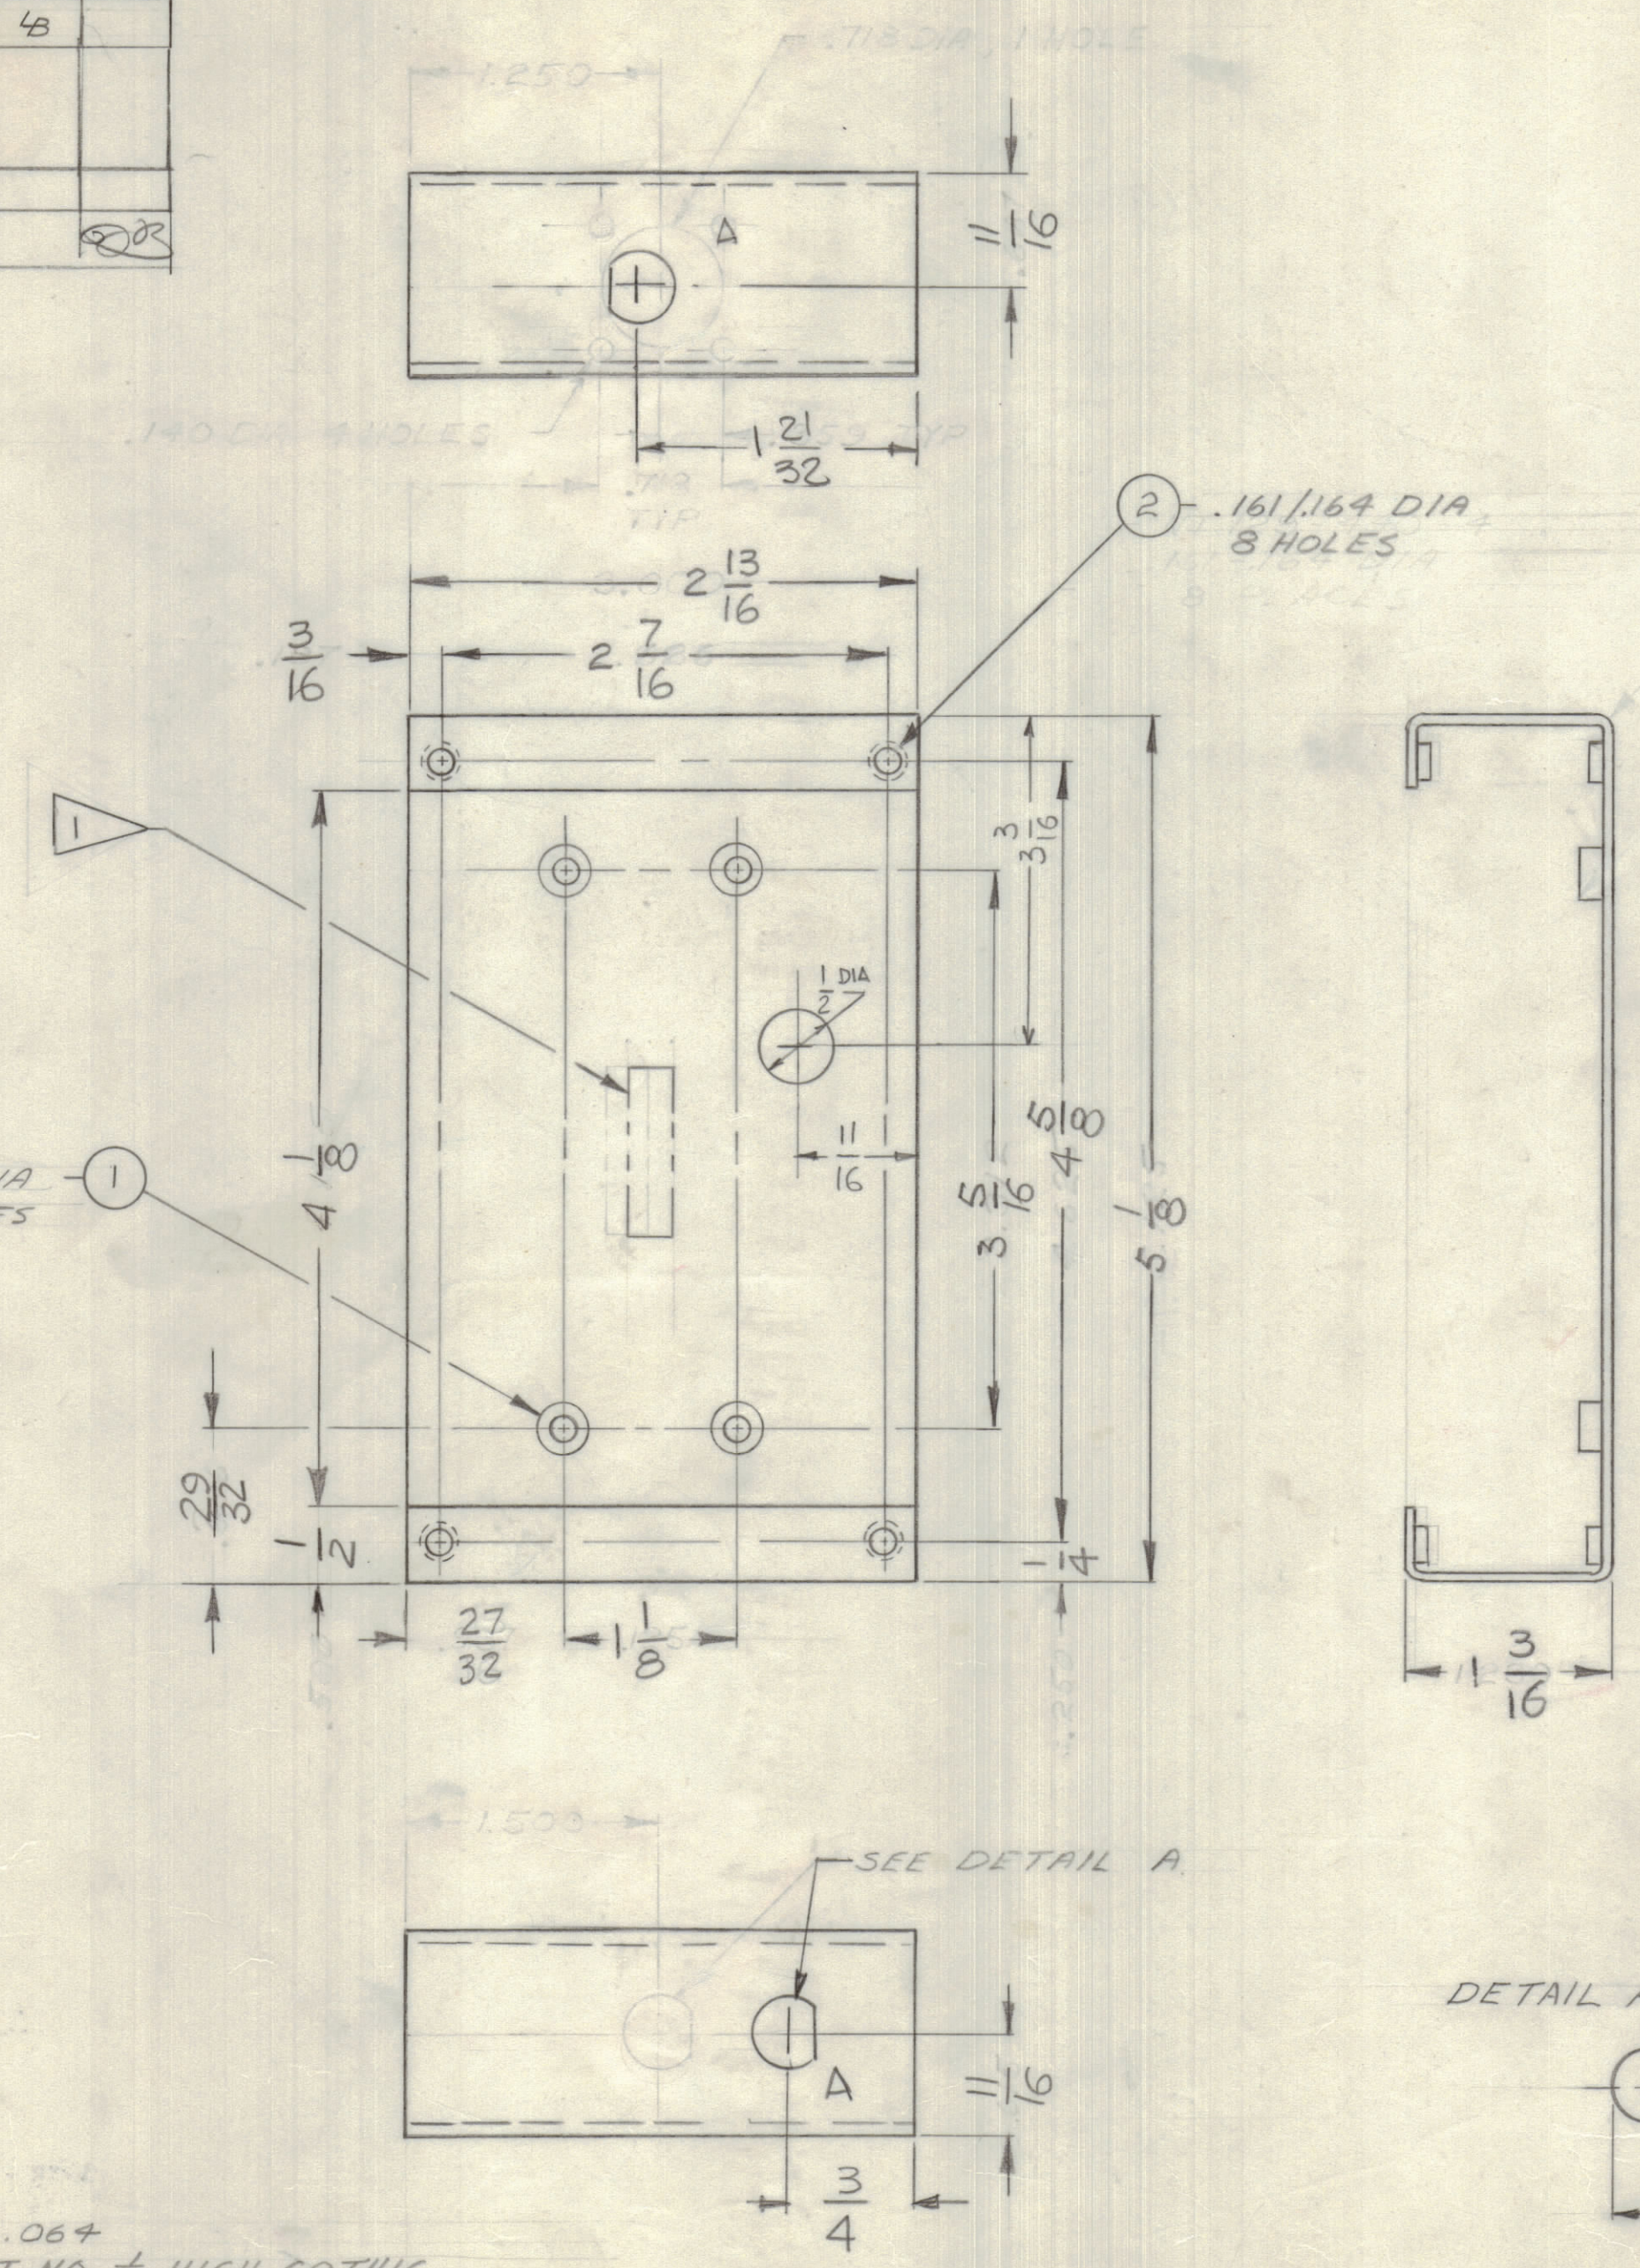

Do NOT USE

1.125
1.683 1/2
843

MS11370 C

NO LONGER REQUIRED
REPLACE BY MS 6976

2. MIN INSIDE BEND RAD. .064
1. METAL STAMP TMC PART NO 1/8 HIGH GOTHIC
IN APPROX POSITION SHOWN.
NOTES:

TOLERANCES		SCALE: 1/1
ALL OTHERS	DEC. DIM. ± .015 FRAC. DIM. ± 1/16 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

LMC 8 50275	132/71	A 11017	OCT. 19/71
MODEL	PROJECT NO.	ASS'Y. NO.	DATE

.064 THK		TMC (Canada) LIMITED	
STOCK SIZE		OTTAWA ONTARIO	
AL ALY	CHASSIS, FILTER		
MATERIAL	WEIGHT PER PC.	BOTTOM	
575 H32	D. REID		
TYPE & TEMPER	DRAWN	ELEC. DES. APP.	MECH. DES. APP.
HEAT TREAT. SPEC.	L. BROWN		
IRIDITE S404	CHECKED	FINAL APPROVAL	
FINISH & SPEC. NO.	MS11370		C