


ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
Ø		REL TO PROD.	24 APR 73	1233	C.C.	PHM	SOW	2	1	NT 10002-1	FASTENER, SELF-LOCKING	

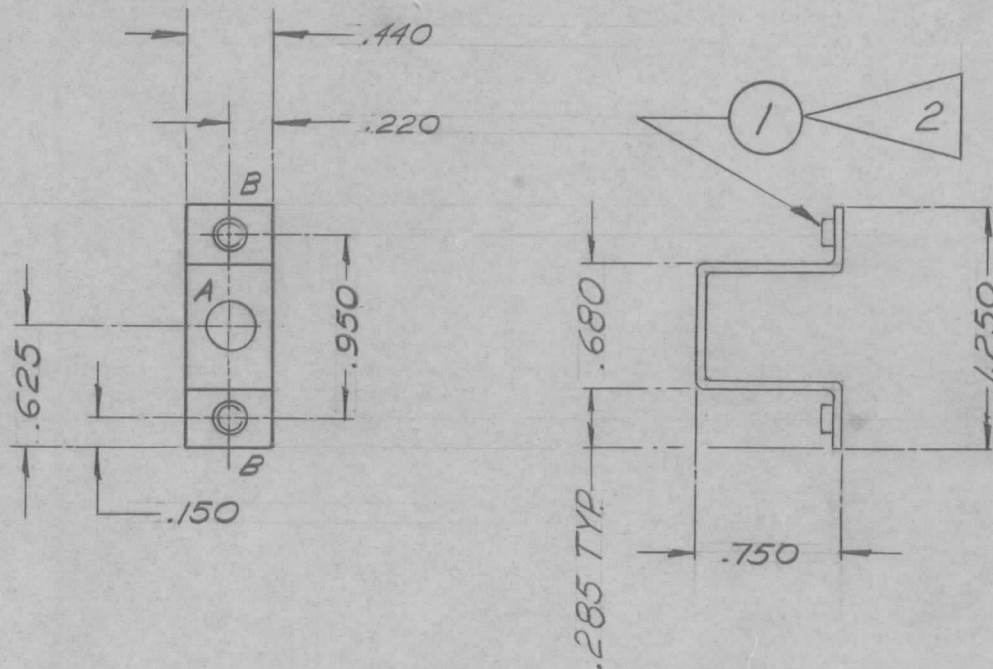

HOLE DATA TABLE		
HOLE	DESCRIPTION	Q'TY
A	.250 DIA.	1
B	.171 DIA.	2

2. INSTALL AFTER FINISHING

1. MINIMUM INSIDE BEND RADIUS : .050"

NOTES:

TTRT-F	141/72	A11094	JAN 8 73	.050 THK.		TMC (Canada) LIMITED	
MODEL	PROJECT NO.	ASS'Y. NO.	DATE	STOCK SIZE		OTTAWA	ONTARIO
USED ON				AL ALY	POT BRACKET		
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.			
				MATERIAL	WEIGHT PER PC.		
				575 H32			
				TYPE & TEMPER			
TOLERANCES				SCALE 1:1	C. CHARLES		
				DRAWN			
				ELEC. DES. APP.			
				MECH. DES. APP.			
				S. WITTEN			
				FINAL APPROVAL			
ALL OTHERS				HEAT TREAT. SPEC.			
DEC. DIM. ± .X = .05				IRIDITE S404			
FRAC. DIM. ± 1/64 .XX = .01				FINISH & SPEC. NO.			
ANGULAR DIM. ± 0° 30' .XXX = .005							
				MS 11493 Ø			