



REQ. PER UNIT	USED ON			MS-1227	D
	MODEL	ASS'Y. NO.	DATE		
2	PSP-350		4-24-58		

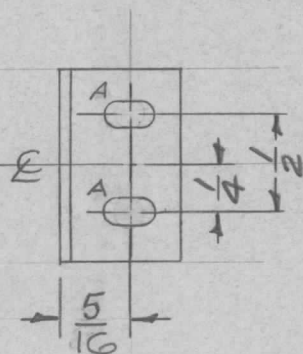

A - $\frac{11}{64} \times \frac{11}{32}$ SLOT 2 REQ.
 B - $\frac{7}{32}$ (.218) D. 1 Req.

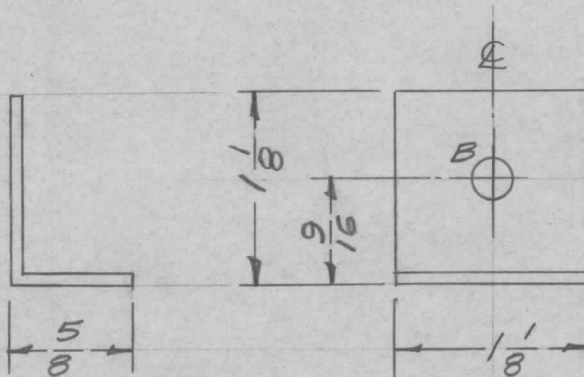

Ref. MS-1126 (Front Bracket)

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL						
D	1	S404-IRIDITE WAS 5/16 WAS 5/32 LAUSTIC DIP	5/25/58	1001	P		EMN										
C	1	A-WAS 5/32 (.156) D HOLE - 2 REQ.	5/7/58	417	ave	file			.064 THK.	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK							
B	1	5/16 WAS 3/8	5/9/58	2	file	16			STOCK SIZE								
A	1	1 1/8 WAS 1 WAS 1 PER UNIT	4/30/58	1	16	file			Aluminium	BRACKET, RESISTOR MOUNTING							
TOLERANCES								MATERIAL									
SCALE: FULL								5052H32									
DEC. DIM. ±								TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED		FINAL APPROVAL	
FRAC. DIM. ± 1/64								S404-IRIDITE									
ANGULAR DIM. ±								FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.		MS-1227		D	
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.																	
REMOVE ALL BURRS AND SHARP EDGES																	