


|               |         |            |         |         |   |
|---------------|---------|------------|---------|---------|---|
| REQ. PER UNIT | USED ON |            |         | MS-1324 | A |
|               | MODEL   | ASS'Y. NO. | DATE    |         |   |
| 2             | MSR-4   |            | 8-29-58 |         |   |

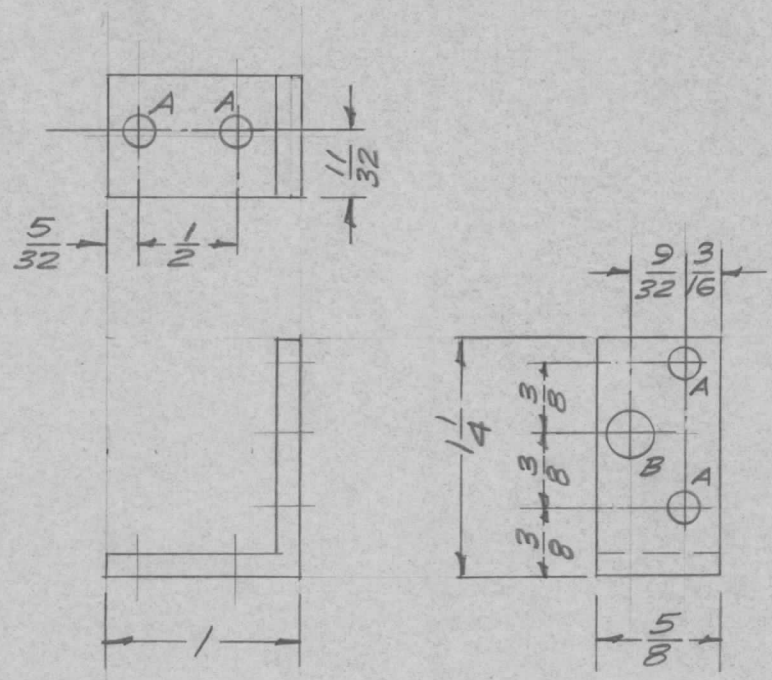

A - 1/64 (.171) D. 4 Req.  
 B - 1/4 (.250) D. 1 Req.

| ISSUE             | ITEM | CHANGED FROM                               | DATE    | CH. NO. | DRAFTS | CHECKER | ENG. APP. | REQ. ITEM   | PART NO.          | DESCRIPTION   | SYMBOL  |                |   |
|-------------------|------|--|---------|---------|--------|---------|-----------|---|-------------------|---|---------|----------------|---|
|                   |      |  |         |         |        |         |           | 1/8 Thk Angle   |                   | THE TECHNICAL MATERIEL CORP.<br>MAMARONECK, NEW YORK<br>BRACKET, RELAY MTG. |         |                |   |
| A                 | 1    | 5404-Y-IRID ME WAS 3/01 CAUSTIC DIP        | 12-8 59 | 1001    | P      |         | EMN       | STOCK SIZE  |                   |   |         |                |   |
|                   | 1    | MSR-4 DID USE MS-998 NEW DWG. PER CH. REQ. | 8/29/58 | 439 793 | 16     | Hde     |           | Aluminum  |                   |   |         |                |   |
| TOLERANCES        |      |  |         |         |        |         |           | SCALE: FULL   |                   |   |         |                |   |
| DEC. DIM. ±       |      |  |         |         |        |         |           | MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. |                   |   |         |                |   |
| FRAC. DIM. ± 1/64 |      |  |         |         |        |         |           | REMOVE ALL BURRS AND SHARP EDGES  |                   |   |         |                |   |
| ANGULAR DIM. ±    |      |  |         |         |        |         |           |   |                   |   |         |                |   |
|                   |      |  |         |         |        |         |           | 6063-T5   |                   | 16 8/29/58  | Hde     |                |   |
|                   |      |  |         |         |        |         |           | TYPE & TEMPER   | HEAT TREAT. SPEC. | DRAWN   | CHECKED | FINAL APPROVAL |   |
|                   |      |  |         |         |        |         |           | S404 YEL. IRIDITE   |                   | P.I.K.  |         |                |   |
|                   |      |  |         |         |        |         |           | FINISH & SPEC. NO.  | ELEC. DES. APP.   | MECH. DES. APP.   |         |                |   |
|                   |      |  |         |         |        |         |           |   |                   |   |         | MS-1324        | A |