REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS-1372	A
.	TER-5000-70		1-9-59		

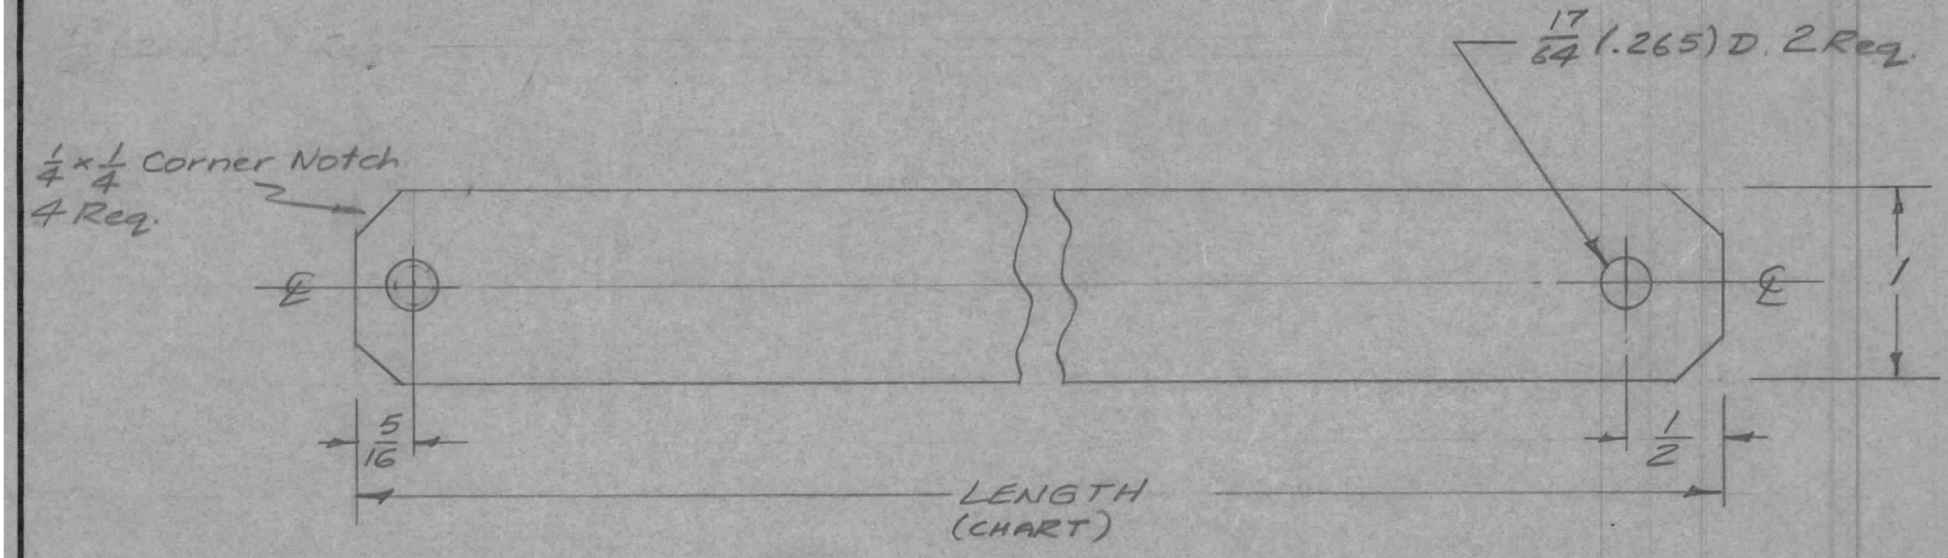

PART NO.	LENGTH	
MS-1372-1	8 13/16	Lead, Ground, Top Left 1 Per
MS-1372-2	10 5/16	Lead, Ground, Top Right 1 Per
OBSOLETE USE CA954 MS-1372-3	12 7/8	Lead, Input Connector 2 Per
MS-1372-4	18	

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	2 1	OBSOLETE USE CA954" ADD. MS-1372-4" ADD.	1.7.65	13228	J.L.		

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ± 1/64
ANGULAR DIM. ±

SCALE: FULL

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

.025 Thk.
STOCK SIZE

Copper
MATERIAL

Comm. Hard
TYPE & TEMPER

HEAT TREAT. SPEC.

S245 Silver Plate .0005
FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

LEAD, CONNECTING

DRAWN	CHECKED	FINAL APPROVAL
16 1/3/59		
ELEC. DES. APP.	MECH. DES. APP.	MS-1372 A
	6.6.	