


REQ. PER UNIT	USED ON			MS-1399	G
	MODEL	ASS'Y. NO.	DATE		
1	RTF-2	P/O POWER AMP	10-31-58		

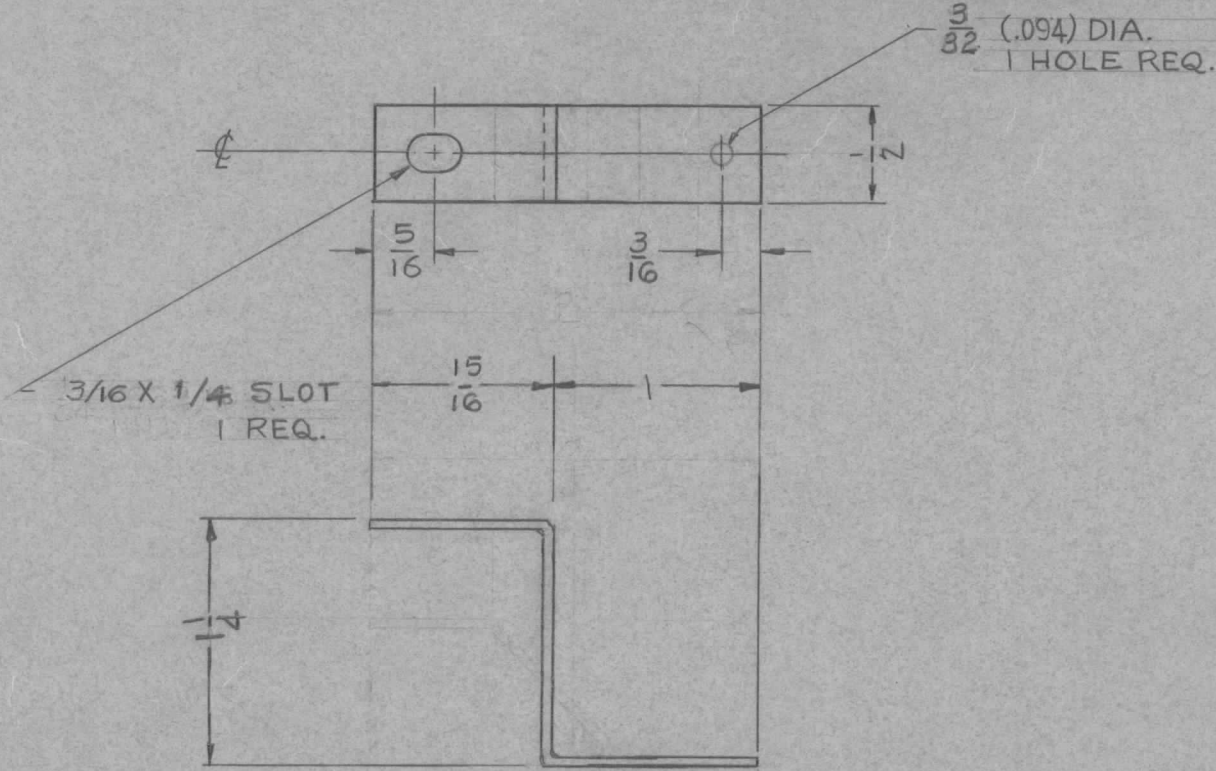

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL			
C	1	3/16 X 1/4" SLOT WAS 3/16 X 5/16" SLOT	8/9/60	2674	RU		<i>Hile</i>		.064	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK BRACKET, SUPPORT CAPACITOR				
B	+	5409-Y-IRIDITE WAS S101 CAUSTIC DIP	12-8 59	1001	P		<i>EMN</i>		STOCK SIZE					
A		Pc REDESIGNED	1/6/59		woc		<i>Hile</i>		ALUMINUM					
									MATERIAL					
TOLERANCES			SCALE:					5052-H32		JOHN C BIELE	<i>Hile</i>	<i>M. O'Connell</i>		
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION: REMOVE ALL BURRS AND SHARP EDGES					TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL		
FRAC. DIM. ±								5404-YEL-IRIDITE			<i>RFB</i>			
ANGULAR DIM. ±														
								FINISH & SPEC. NO.	ELEC. DES. APP	MECH. DES. APP	MS-1399	G		