REQ. PER. UNIT	USED ON MODEL	ASS'Y. NO.	DATE
1	RFB-1	GPT-10K	
1	RFD-1	PAL-1K	6-23-59
	RFC-1		11-22-60

MS-1686 B

A - 1/8 (.125) 2 REQ'D,

B - 13/64 (203) 2 REQ'D,

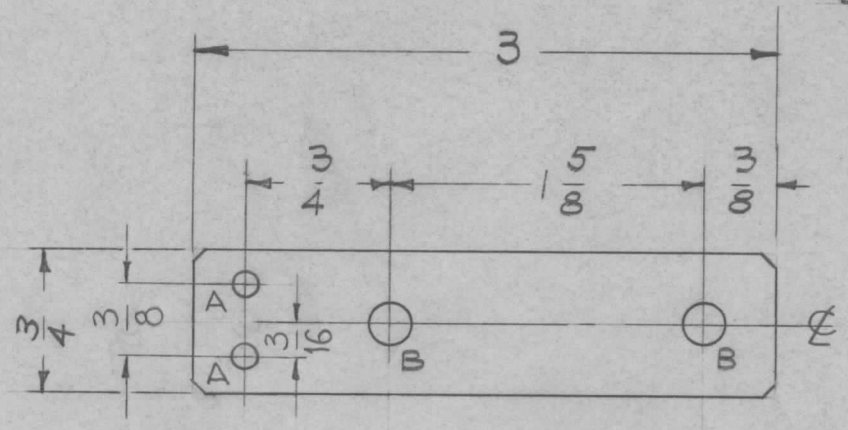

Note:
All Corners Nicked
1/16 x 1/16.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	2	①"A" Hole Added	3-30-61	4518	DM	RCB	
	1	①"A" Hole relocated					
A	1	Nicked all corners	12-1-59	1627	DM	LG	

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ± 1/64
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		.064	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		STOCK SIZE	CAPACITOR STRAP	
		ALUMINUM		
		MATERIAL		
		5052-H32	DRILLED	
		TYPE & TEMPER / HEAT TREAT. SPEC.	DRAWN	CHECKED
		S404 IRIDITE		
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.

ARB
FINAL APPROVAL

MS-1686 B

FORM 108-A