


REQ. PER UNIT	USED ON			MS-1726	A
	MODEL	ASSY. NO.	DATE		
6	RAK-8		4-20-59		

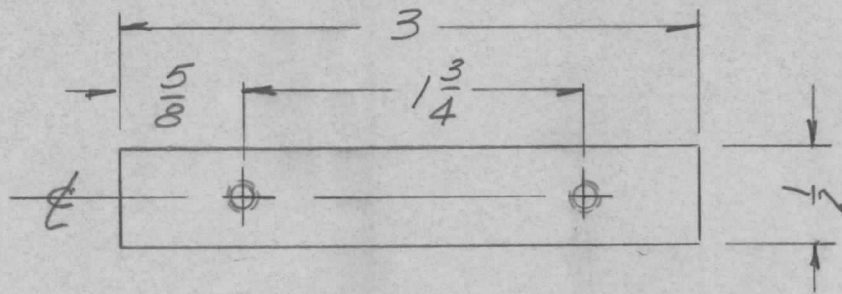

DRILL & TAP 8-32 CL 2
2 HOLES

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL		
								119A		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
								STEEL		NUT, BAR			
A	1	S404-YEL-IRIDITE WAS S101 CAUSTIC DIP	12-8 59	1001	P		EMN	MILD					
TOLERANCES			SCALE: <i>1/16</i>										
DEC. DIM. ± FRAC. DIM. ± <i>1/64</i> ANGULAR DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION: REMOVE ALL BURRS AND SHARP EDGES										
								TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
								S404-YEL IRIDITE S114 ZINC CHROM. PRIM. S220 THE RCAF SMOOTH BGV					
								FINISH & SPEC. NO.	ELEC. DES. APP	MECH. DES. APP			
												MS-1726	A