


Perforations -.150 Dia Holes  
on 3/16 Staggered P's

REQ. PER. UNIT	USED ON			MS-1757	A
	MODEL	ASSY. NO.	DATE		
1	GPT-10K	MAIN FRAME	5-5-59		

(26) 3/16 DIA. HOLES -

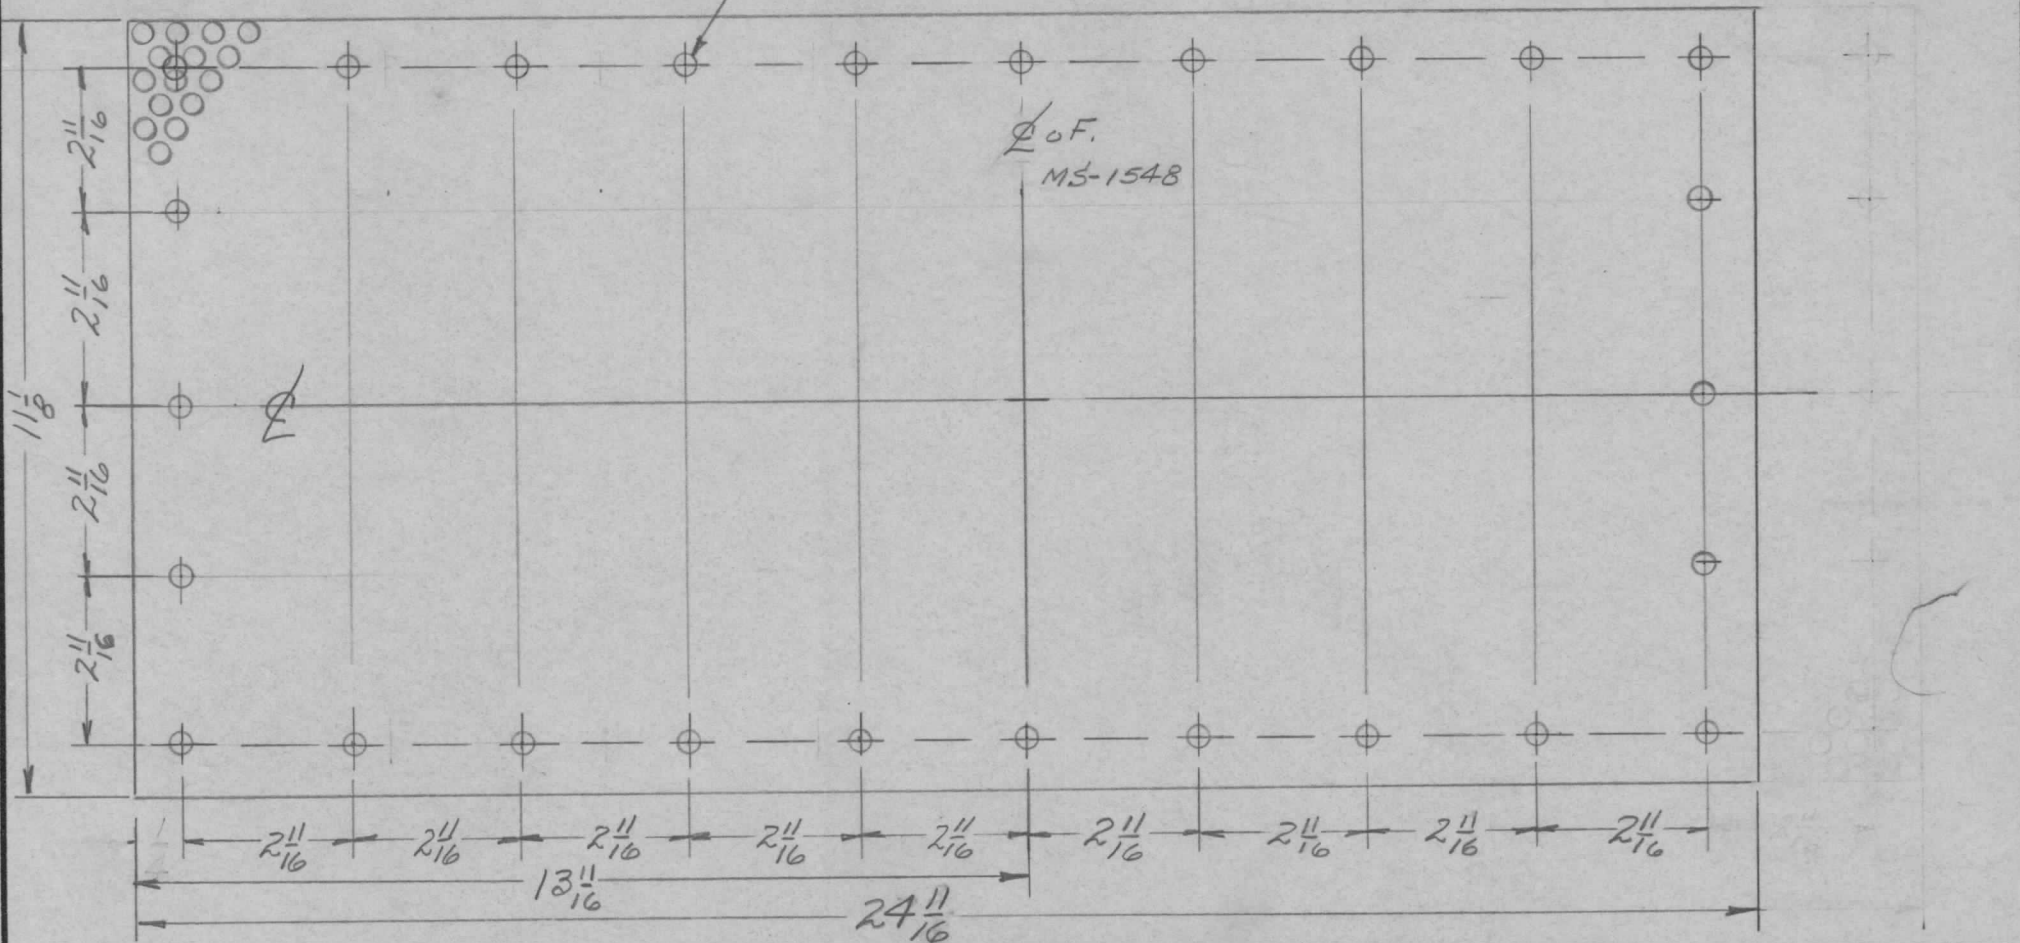

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL	
			THE TECHNICAL MATERIEL CORP.				
			MAMARONECK, NEW YORK				
			PERFORATED SHEET				
			TOP SHIELD, R.F. DECK				
A	3/16 HOLES QUIN - WAS 28 24 11/16 WAS 27 3/8	6/8/59					
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE: <i>1/4" = 1"</i>				
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				
FRAC. DIM. ±							
ANGULAR DIM. ±							
5052-H32			5052-H32		DRAWN		CHECKED
5404 IRIDITE			5404 IRIDITE		DRAWN		CHECKED
FINISH & SPEC. NO.			FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.
					MS-1757		A