



REQ. PER. UNIT	USED ON			MS-1811 B
	MODEL	ASS'Y. NO.	DATE	
1	ATS-50(70)TU2		6-10-59	

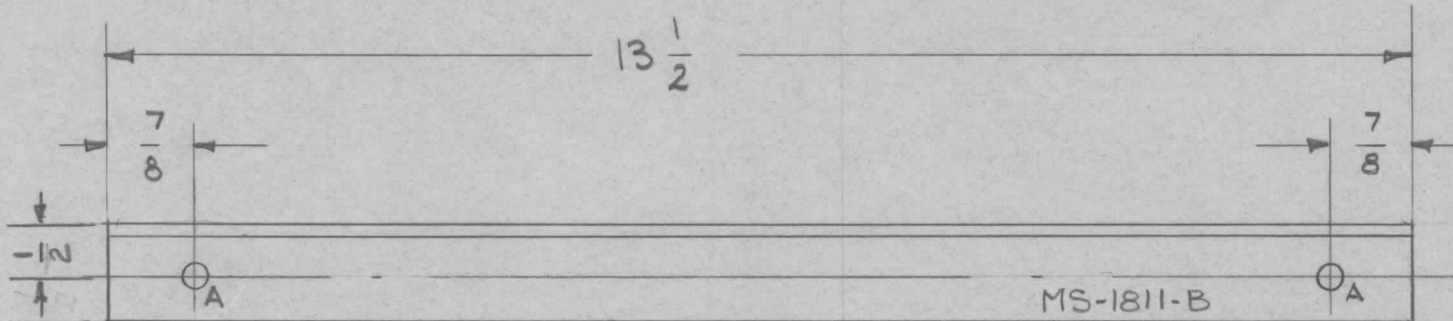

METAL STAMP TMC PART NO.  
1/8 HIGH, GOTHIC.

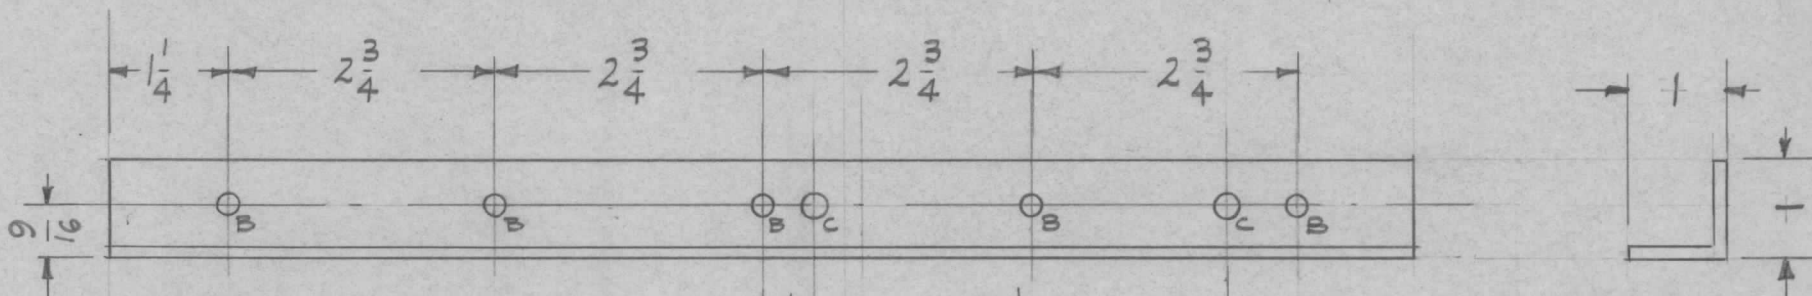

HOLES	REQ'D.
A - 5/16 (.312) D.	2
B - 13/64 (.203) D.	5
C - 1/4 (.250) D.	2

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL				
B	1	2 "C" HOLES WERE 15/64 DIA	10-8-62	7310	af.	Jde		1/8		THE TECHNICAL MATERIEL CORP.					
A	1	"A" HOLE WAS 1/4 D.	10/12/59	1408	16			ALUMINUM		MAMARONECK, NEW YORK					
								MATERIAL		BRACKET, REAR ANGLE					
								5052-H32		ATS-50(70)TU2					
TOLERANCES			SCALE: 1/2					5404 - IRIDITE							
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					TYPE & TEMPER	HEATTREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL			
FRAC. DIM. ±								5404 - IRIDITE	Yellow	Jde	Jde				
ANGULAR DIM. ±								1/64	FINISH & SPEC. NO.	ELEC. DES. APP	MECH. DES. APP				
											MS-1811 B				