



MS-1820 E

HOLE A-3/8 X 1/2 SLOT HOLE REQ'D 5

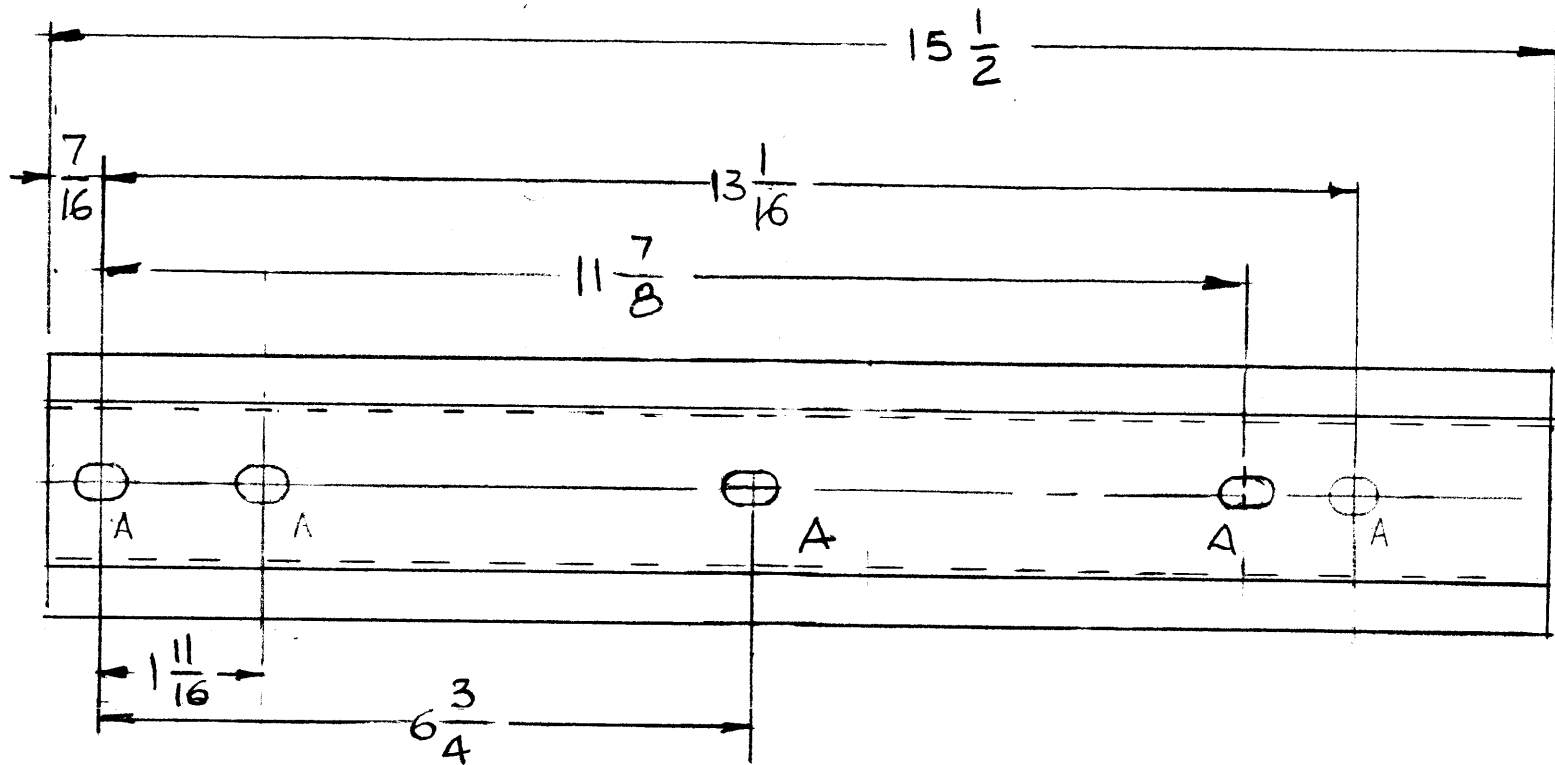

MS-1820-2

(USED ON ATS-2B)

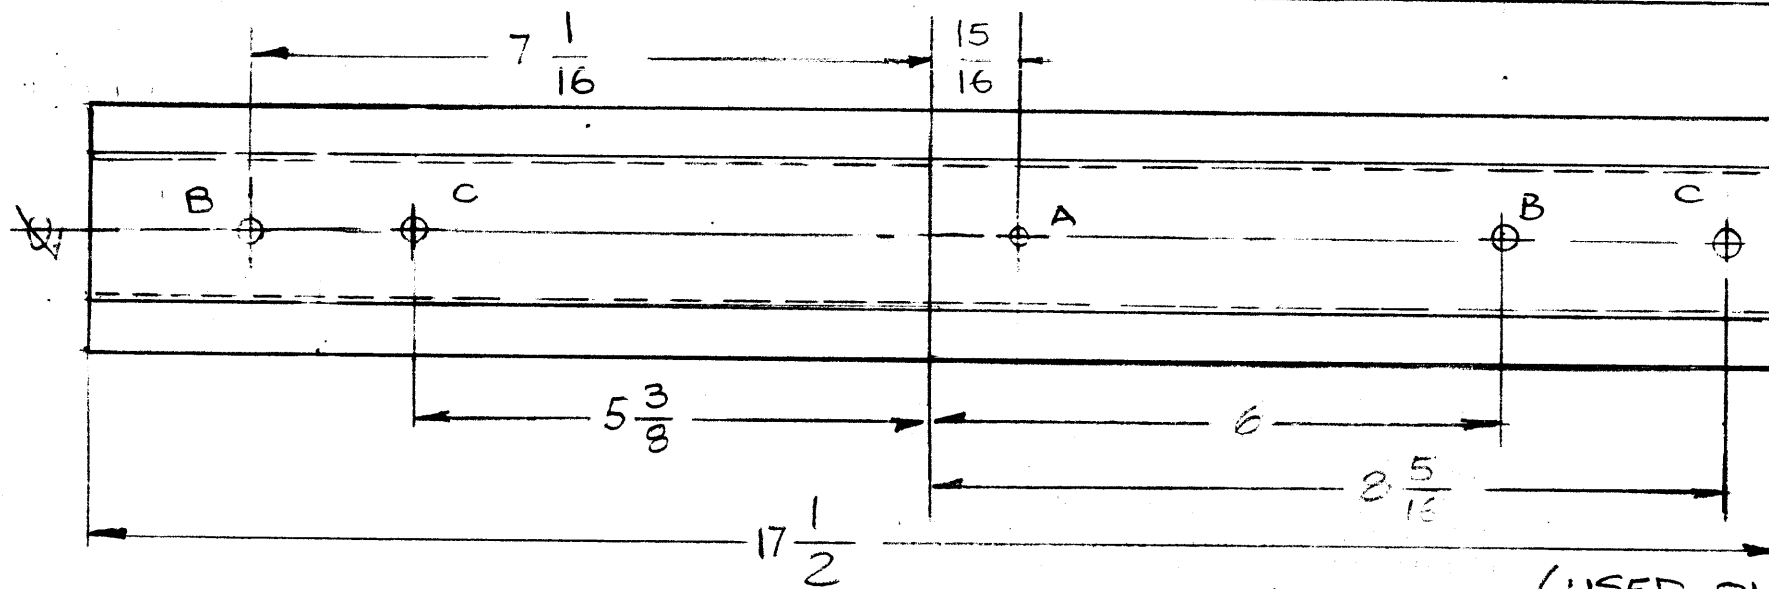

MS-1820-1

(USED ON ATS 2/2A)

HOLE
 A-5/16 (.312D) 1REQ.
 B-11/32 (.343D) 2REQ.
 C-3/8 DIA 2REQ

E	1	ALL HOLES RELOCATED DIM 15 1/2 WAS 16 1/4	11-1-79	21734	R.D.L.	RU	RU
D	2	MS 1820-2 ADDED	5-23-79	21492			
C	1	TWO "C" HOLES ADDED	10-14-60	3157	OHG		
B	1	TWO "A" HOLES DELETED	10/12/59	1408	K		
A	1	"A" Hole WAS 9/32 D.					
A	2	2 HOLES DELETED	9/14/59	1292	DM		
A	1	9/16 LIP WAS 5/8					

Property of:
 THE TECHNICAL MATERIEL CORPORATION
 MAMARONECK, NEW YORK

ISSUE		CHANGED FR M	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES		SCALE:					
DEC. DIM. ±		2					
FRAC. DIM. ± 1/64		TU-2B					
ANGULAR DIM. ±		ATS-2B					
		MS1820-2					
		8-27-79					
		MS1820-1					
		6-10-59					
		USED ON					

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
.081		THE TECHNICAL MATERIEL CORP.	
STOCK SIZE		MAMARONECK, NEW YORK	
ALUMINUM		BRACKET, MOUNTING PLATE	
MATERIAL			
5052-H32			
TYPE & TEMPER	HEATTREAT. SPEC.	DRAWN	CHECKED
S404 IRIDITE		SAF	
FINISH SPEC. NO.		ELEC. DES.	MECH. DES. APP.
		MS-1820	E