


REQ. PER. UNIT	USED ON			MS-1838
	MODEL	ASS'Y. NO.	DATE	
1	GPT-10K	AUX. FR		

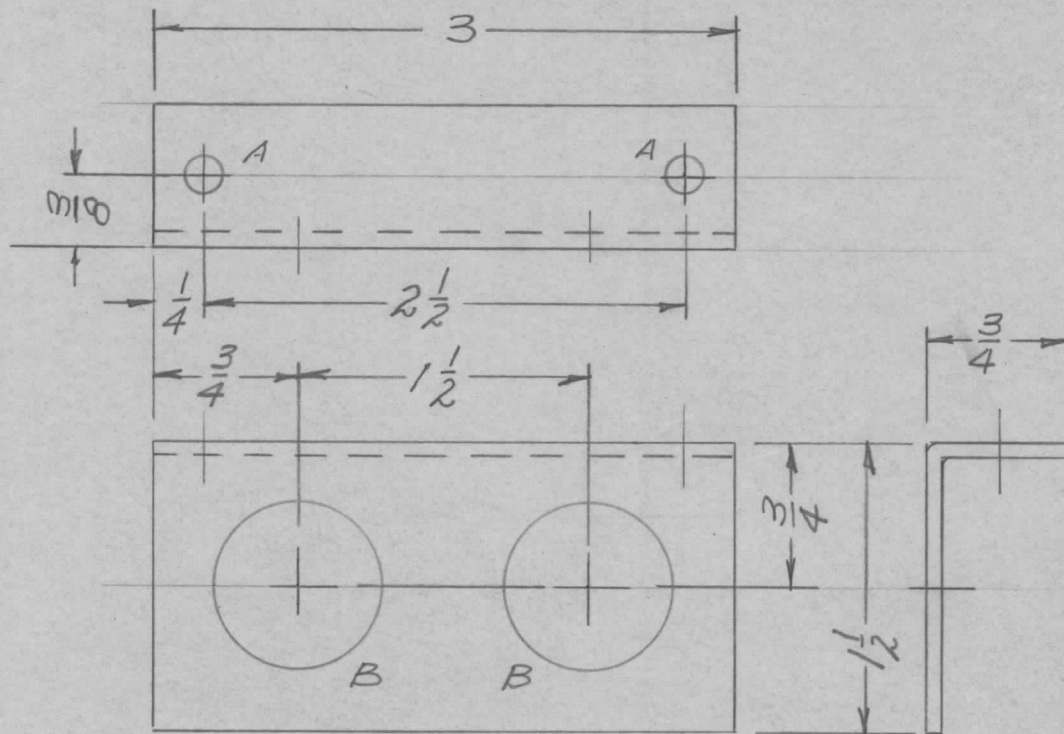

HOLE LEGEND
 A - $\frac{13}{64}$ (.203) DIA. 2 REQ.
 B - $\frac{7}{8}$ (.875) DIA. 2 REQ.

INSIDE RADIUS: METAL THICKNESS

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL			
								.081 THICK		THE TECHNICAL MATERIEL CORP.				
								STOCK SIZE		MAMARONECK, NEW YORK				
								ALUMINUM		BRACKET, CONNECTOR CABLE				
								MATERIAL						
								5052-H32		7/157				
								TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED			
								5404-1R10ITE						
								FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP			
TOLERANCES			SCALE: <i>1/16</i>											
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES											
FRAC. DIM. ± 1/64														
ANGULAR DIM. ±														
											MS-1838			