

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS
.X ± .05
.XX ± .01
.XXX ± .005


FRACTIONS
± 1/64
ANGLES
± 0° 30'

TOLERANCES

CUT HERE
GUARANTEED
2-66

LD-REF.	REQ. PER. UNIT	USED ON		
		MODEL	ASS'Y. NO.	DATE
LD-890	1	RAK-9 C	A-2049	12-14-59
LD-890	1	RAK-9 D	A-2049	
LD-882	1	RAK-11 A	A-2048	
LD-882	1	RAK-11 B	A-2048	
LD-887	1	AX-239	A-2048	
LD-882	1	RAK-20	A-2048	12-19-61
LD 2148	1	API25	A5461	

MS-1927 B

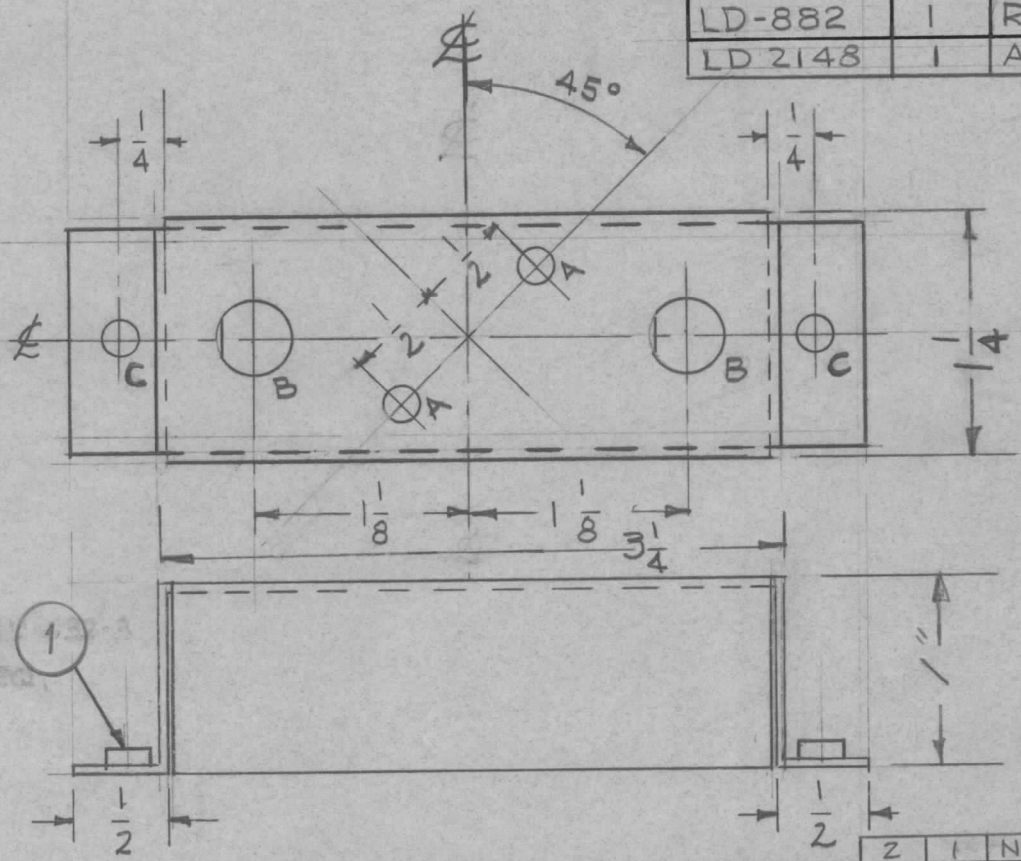

A ~ 1/8 (.125) D. 2 REQ.

B ~ 4.02 ±.005 / -.000 4 REQ.

C ~ .191 / .194 D. 2 REQ.

NT-129-632-3
2 REQ.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
2	1	NT129-632-3	NUT, ROUND, SWAGE TYPE	
			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
			CHASSIS, ATTENUATOR	
			5052-H32	
			5404 YEL. IRIDITE	
			ELEC. DES. APP MECH. DES. APP	
			MS-1927 B	

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B		ADDED LD2148 TO CHART	9/29/66	16940	JL	JCS	JCS
A	1	② "A" Holes changed to "C" Holes.	1-24-61	3973	DJM	JCS	RK
TOLERANCES			SCALE:				
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				
FRAC. DIM. ±							
ANGULAR DIM. ±							