



| | | | | | |
|---------------|---------|------------|---------|---------|---|
| REQ. PER UNIT | USED ON | | | MS-1982 | C |
| | MODEL | ASS'Y. NO. | DATE | | |
| 2 | AS-120 | GPT-40K | 1-23-60 | | |

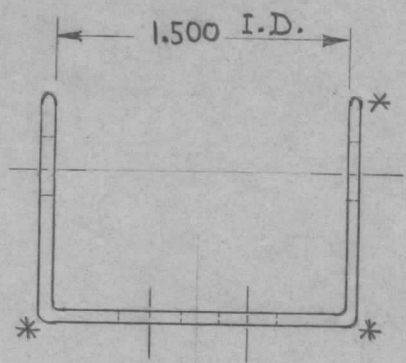

* NOTE:
ALL EDGES TO BE ROUNDED

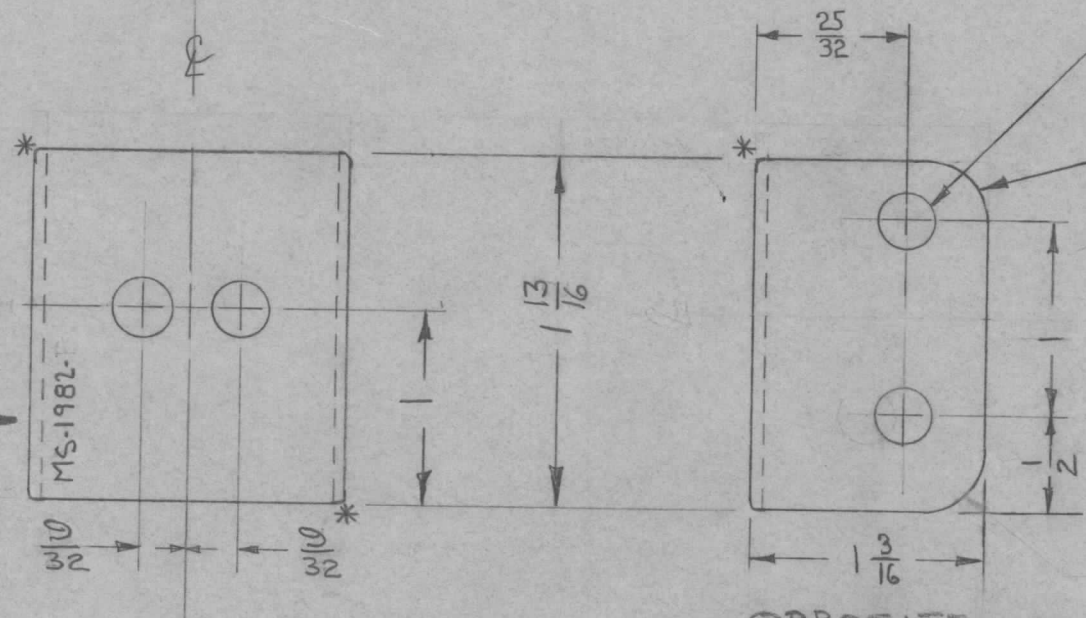

ALL HOLES $\frac{9}{32}$ DIA. 6 REQ.

$\frac{5}{16}$ R (TYP)

FINISH NOTES:
S-245 BRIGHT SILVER PLATE.
S-423 IRIDITE; AND 18P
SILVER KOTE.

METAL STAMP
TMC PART NO
1/8 HIGH, GOTHIC

MS-1982

OPPOSITE
SIDE
IDENTICAL

| ISSUE | ITEM | CHANGED FROM | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. | REQ. ITEM | PART NO. | DESCRIPTION | SYMBOL | | | | |
|-------------------------------|------|----------------------------|--|---------|--------|---------|-----------|---------------------|-----------------------|--|---------|----------------|--|--|--|
| C | 1 | NOTE ADDED | 7-24-63 | 9552 | | W.P. | M.P.B. | $\frac{1}{16}$ THK. | | THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK | C | | | | |
| B | 2 | FINISH WAS RHODIUM .000025 | 2-7-63 | 8181 | | J.P. | L.B. | STOCK SIZE | | | | | | | |
| A | 1 | 5/16 R. ADDED | | | | | | BRASS | BRACKET, COIL & WAFER | | | | | | |
| | | | | | | | | | | SUPPORT (PA BANDSW) | | | | | |
| TOLERANCES | | | SCALE: FULL | | | | | $\frac{1}{2}$ HARD | | | | | | | |
| DEC. DIM. \pm | | | MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES | | | | | TYPE & TEMPER | HEAT TREAT. SPEC. | DRAWN | CHECKED | FINAL APPROVAL | | | |
| FRAC. DIM. $\pm \frac{1}{64}$ | | | | | | | | SEE NOTE | | | | | | | |
| ANGULAR DIM. \pm | | | | | | | | | | | | | | | |
| | | | | | | | | FINISH & SPEC. NO. | ELEC. DES. APP | MECH. DES. APP | MS-1982 | C | | | |