


REQ. PER UNIT	USED ON			MS-2044	B
	MODEL	ASS'Y. NO.	DATE		
3	AX-209	GPT-40K	2-16-60		

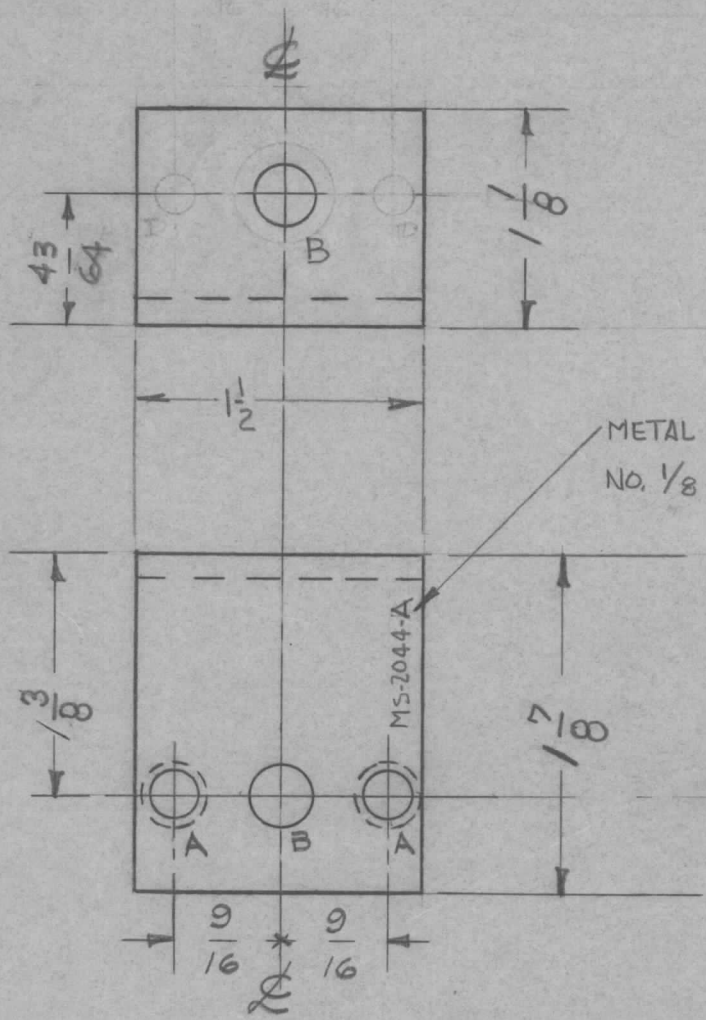

- A - .221-.224 DIA. 2 REQ. (NT-129-832-6)
- B - 5/16 DIA. 2 REQ.
- C - 1/2 DIA. 1 REQ.
- D - 3/16 DIA. 2 REQ.

METAL STAMP TMC PART NO. 1/8 HIGH, GOTHIC,

1/8 RADIUS BEND

1 MOUNT ITEM 1 IN "A" HOLES AS SHOWN

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
	B	NT-129-832-6	11/7/63	10282			
	A	ITEM 1 WAS NT-129-832-6	4/26/61	4745			
TOLERANCES			SCALE:				
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				
FRAC. DIM. ±							
ANGULAR DIM. ±							

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
2	1	NT-129-832-6	NUT, ROUND SWAGE TYPE	A
1/8 TH'K			THE TECHNICAL MATERIEL CORP.	
STOCK SIZE			MAMARONECK, NEW YORK	
ALUMINUM			BRACKET, SHAFT ALIGNMENT	
MATERIAL			CAPACITOR	
5052-H32			TORILLO	J De
TYPE & TEMPER		HEATTREAT. SPEC.	DRAWN	CHECKED
S404-YEL. IRIDITE				
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	
			MS-2044	B