


REQ. PER. UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	GPT-40K	AT-101	3/4/60

MS-2093 D

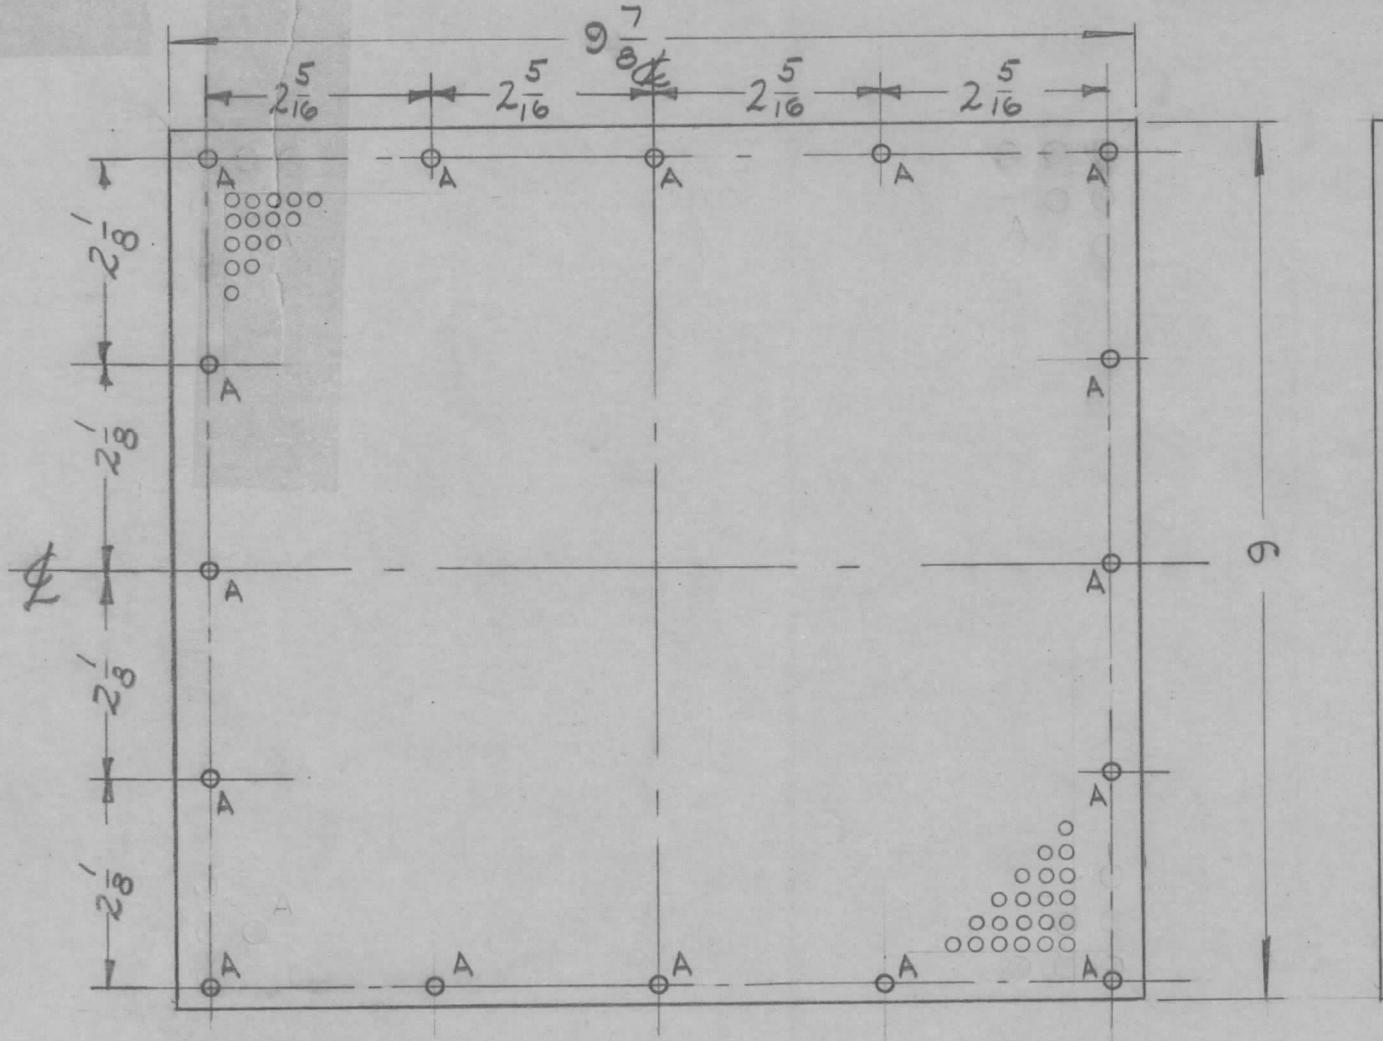

PERFORATIONS —  
 .156 DIA ON 3/16 STAGGERED  
 CENTERS

A - 1/8(.125)D. 16 REQ.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		
DECIMALS	TOLERANCES	FRACTIONS
.X ± .05		± 1/64
.XX ± .01		ANGLES
.XXX ± .005		± 0° 30'

CUT HERE  
2-66

D	1	DWG UPDATED	10/22/63	10255	<i>SP</i>	<i>MGT</i>	<i>WPS</i>	REQ. ITEM	PART NO.	DESCRIPTION			SYMBOL
C	1	MAT'L WAS ALUMINUM	3-7-63	8445	<i>Q</i>	<i>QNY</i>	<i>WPS</i>		.064	THE TECHNICAL MATERIEL CORP.			
B	1	ON Perforation Note A 24 Req. Perforation deleted	6-3-61	5001	<i>Qm</i>	<i>QCB</i>	<i>QDA</i>		PERFORATED ALUMINUM	MAMARONECK, NEW YORK			
A	-	"A" HOLES ADDED	3/17/60	<i>H</i>	P.I	<i>JA</i>	<i>QDB</i>		MATERIAL	PLATE BOTTOM			
ISSUE ITEM		CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	5052-H32		cy	file	<i>QDB</i>	
TOLERANCES		SCALE:						TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
DEC. DIM. ±		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES						S 404 IRIDITE				MS-2093 D	
FRAC. DIM. ±								FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP		
ANGULAR DIM. ±													