


REQ. PER. UNIT	USED ON			MS-2408	C
	MODEL	ASS'Y. NO.	DATE		
1	CHG-1	OVEN	9-14-60		

OPPOSITE SIDE THE SAME

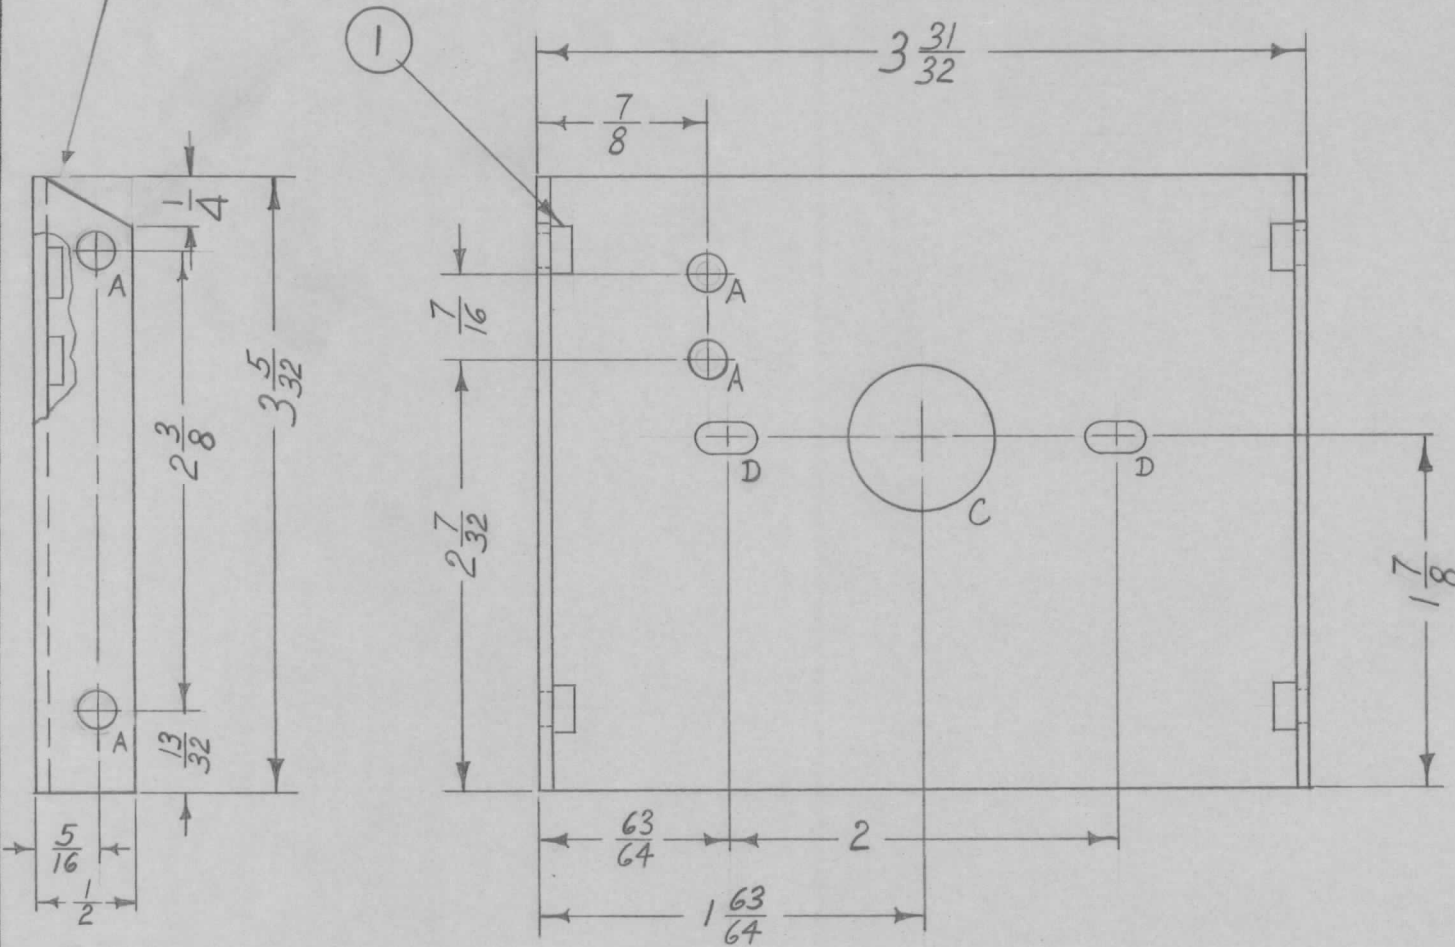

- A- .161-.164 D. (FOR NT-129-440-4) 6 REQ.
- B- 7/64 DIA. DELETED 2"
- C- 3/4 DIA. 1"
- D- 5/32 X 5/16 SLOT 2"

NOTE:  
USE MATERIAL THICKNESS FOR  
MAX. RADIUS ON ALL BENDS  
UNLESS OTHERWISE SPECIFIED.

6	1	NT-129-440-4	NUT, ROUND, SWAGE TYPE		
REQ.	ITEM	PART NO.	DESCRIPTION		SYMBOL
		.064	THE TECHNICAL MATERIEL CORP.		
		ALUMINUM	MAMARONECK, NEW YORK		
			SWITCH BRACKET, OVEN		
		5052-H32	DRAWN	CHECKED	FINAL APPROVAL
		S 404 YELL. IRIDITE	S.D.		MS-2408
			ELEC. DES. APP	MECH. DES. APP	C

C	1	1/4" NOTCH ADDED	11-22-60	3540	DM	QCB	
B	2	TWO "A" HOLES ADDED	10-31-60	3351	WJF		
B	1	TWO "B" HOLES DELETED					
A	2	NOTE ADDED					
A	1	1 7/8 DIM WAS 1 13/16	10-17-60	3210	WJF		
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE: FULL				
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				
FRAC. DIM. ± 1/64							
ANGULAR DIM. ±							