



MS-2474

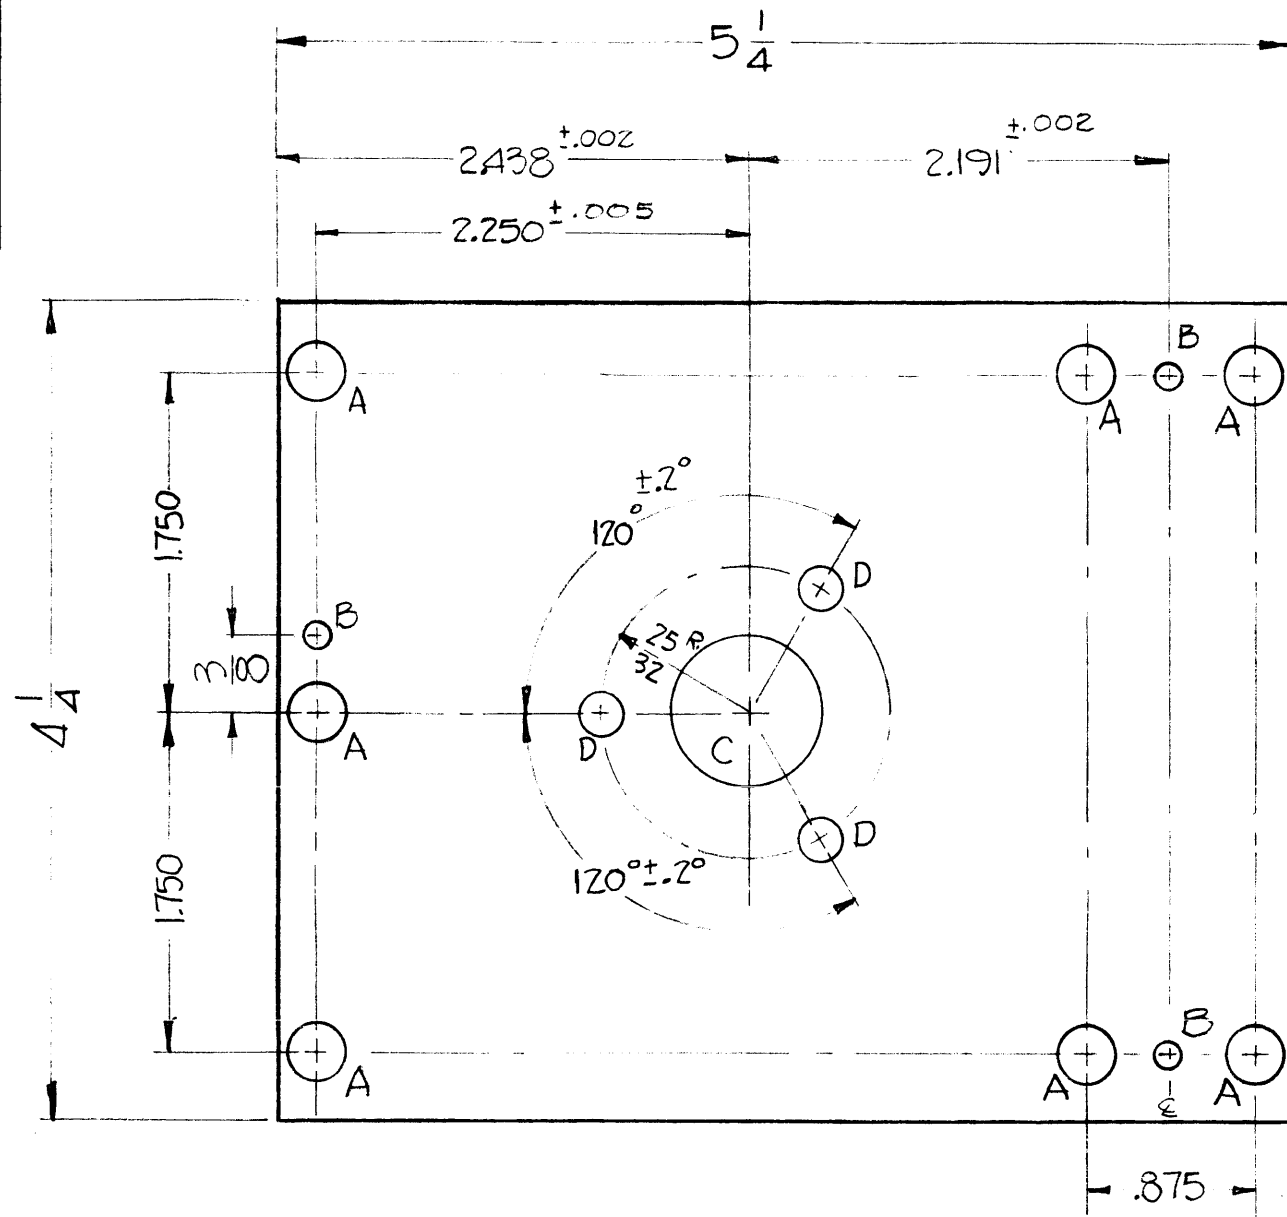

HOLE	REQ.
A ~ 5/16 DIA.	7
B ~ .128 DIA.	3
C ~ 7/8 DIA.	1
D ~ 13/64 DIA.	3

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:  
**THE TECHNICAL MATERIEL CORPORATION**  
 MAMARONECK, NEW YORK

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED:		SCALE:				
DIMENSIONS ARE IN INCHES		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
TOLERANCES ON FRACTIONS ± 1/64		DECIMALS ± .005				
ANGLES ± 1/2°		REMOVE ALL BURRS AND SHARP EDGES				

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
1	GPT-40K	AX-209		11-8-60
USED ON				

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		3/16 THK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		STOCK SIZE		
		ALUMINUM	SUB-PLATE, BANDSWITCH	
		MATERIAL		
	2024-T3			
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKER
	S404-yellow iridite			
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	MS-2474